


**ASSE 1037-2015/  
ASME A112.1037-2015/  
CSA B125.37-15**

# Performance requirements for pressurized flushing devices for plumbing fixtures



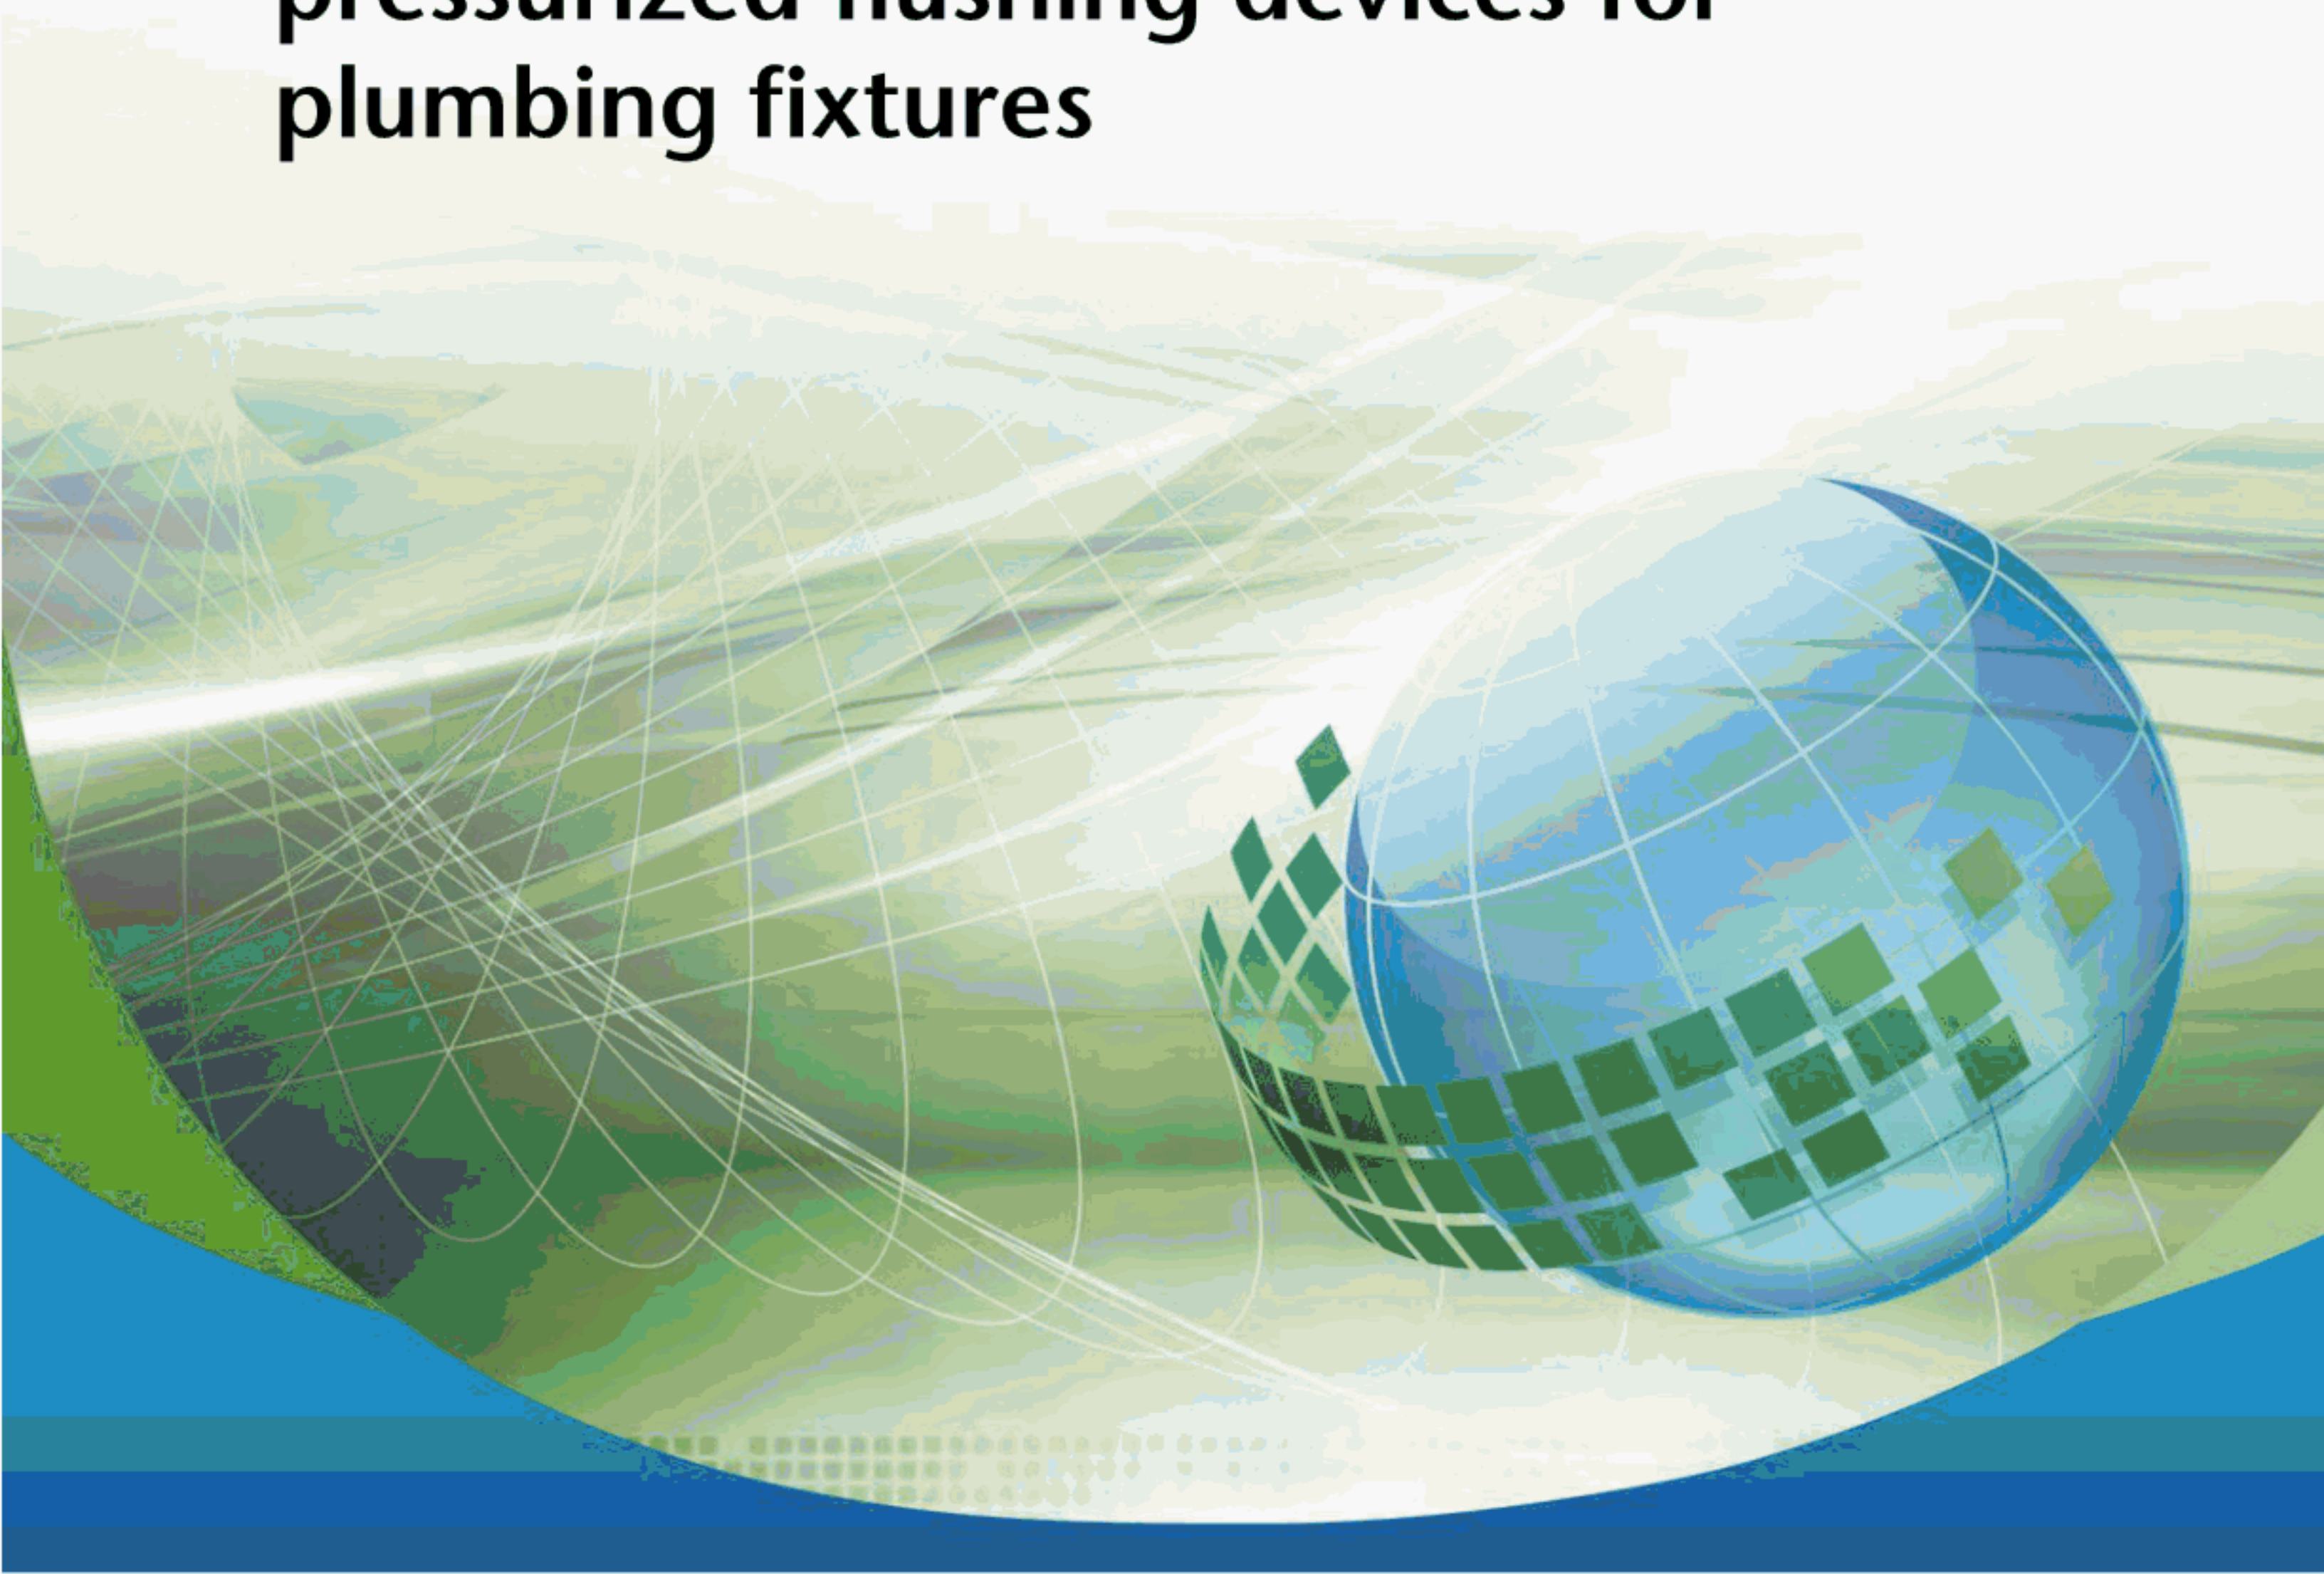

# Legal Notice for Harmonized Standard Jointly Developed by ASME, ASSE, and CSA

## Intellectual property rights and ownership

As between The American Society of Mechanical Engineers ("ASME"), ASSE International Chapter of IAPMO, LLC. ("ASSE"), and Canadian Standards Association ("CSA") (collectively "ASME, ASSE, and CSA") and the users of this document (whether it be in printed or electronic form), ASME, ASSE, and CSA are the joint owners of all works contained herein that are protected by copyright, all trade-marks (except as otherwise noted to the contrary), and all inventions and trade secrets that may be contained in this document, whether or not such inventions and trade secrets are protected by patents and applications for patents. The unauthorized use, modification, copying, or disclosure of this document may violate laws that protect the intellectual property of ASME, ASSE, and CSA and may give rise to a right in ASME, ASSE, and CSA to seek legal redress for such use, modification, copying, or disclosure. ASME, ASSE, and CSA reserve all intellectual property rights in this document.

## Disclaimer and exclusion of liability

This document is provided without any representations, warranties, or conditions of any kind, express or implied, including, without limitation, implied warranties or conditions concerning this document's fitness for a particular purpose or use, its merchantability, or its non-infringement of any third party's intellectual property rights. ASME, ASSE, and CSA do not warrant the accuracy, completeness, or currency of any of the information published in this document. ASME, ASSE, and CSA make no representations or warranties regarding this document's compliance with any applicable statute, rule, or regulation.

IN NO EVENT SHALL ASME, ASSE, and CSA, THEIR RESPECTIVE VOLUNTEERS, MEMBERS, SUBSIDIARIES, OR AFFILIATED COMPANIES, OR THEIR EMPLOYEES, DIRECTORS, OR OFFICERS, BE LIABLE FOR ANY DIRECT, INDIRECT, OR INCIDENTAL DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES, HOWSOEVER CAUSED, INCLUDING BUT NOT LIMITED TO SPECIAL OR CONSEQUENTIAL DAMAGES, LOST REVENUE, BUSINESS INTERRUPTION, LOST OR DAMAGED DATA, OR ANY OTHER COMMERCIAL OR ECONOMIC LOSS, WHETHER BASED IN CONTRACT, TORT (INCLUDING NEGLIGENCE), OR ANY OTHER THEORY OF LIABILITY, ARISING OUT OF OR RESULTING FROM ACCESS TO OR POSSESSION OR USE OF THIS DOCUMENT, EVEN IF ASME OR CSA HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES.

In publishing and making this document available, ASME, ASSE, and CSA are not undertaking to render professional or other services for or on behalf of any person or entity or to perform any duty owed by any person or entity to another person or entity. The information in this document is directed to those who have the appropriate degree of experience to use and apply its contents, and ASME, ASSE, and CSA accept no responsibility whatsoever arising in any way from any and all use of or reliance on the information contained in this document.

ASME, ASSE, and CSA have no power, nor do they undertake, to enforce compliance with the contents of the standards or other documents they jointly publish.

## Authorized use of this document

This document is being provided by ASME, ASSE, and CSA for informational and non-commercial use only. The user of this document is authorized to do only the following:

If this document is in electronic form:

- load this document onto a computer for the sole purpose of reviewing it;
- search and browse this document; and
- print this document if it is in PDF format.

Limited copies of this document in print or paper form may be distributed only to persons who are authorized by ASME, ASSE, and CSA to have such copies, and only if this Legal Notice appears on each such copy.

In addition, users may not and may not permit others to

- alter this document in any way or remove this Legal Notice from the attached standard;
- sell this document without authorization from ASME, ASSE, and CSA; or
- make an electronic copy of this document.

If you do not agree with any of the terms and conditions contained in this Legal Notice, you may not load or use this document or make any copies of the contents hereof, and if you do make such copies, you are required to destroy them immediately. Use of this document constitutes your acceptance of the terms and conditions of this Legal Notice.



**ASSE 1037-2015/  
ASME A112.1037-2015/  
CSA B125.37-15**

**Performance requirements for  
pressurized flushing devices for  
plumbing fixtures**



# Legal Notice for Harmonized Standard Jointly Developed by ASME, ASSE, and CSA

## Intellectual property rights and ownership

As between The American Society of Mechanical Engineers ("ASME"), ASSE International Chapter of IAPMO, LLC. ("ASSE"), and Canadian Standards Association ("CSA") (collectively "ASME, ASSE, and CSA") and the users of this document (whether it be in printed or electronic form), ASME, ASSE, and CSA are the joint owners of all works contained herein that are protected by copyright, all trade-marks (except as otherwise noted to the contrary), and all inventions and trade secrets that may be contained in this document, whether or not such inventions and trade secrets are protected by patents and applications for patents. The unauthorized use, modification, copying, or disclosure of this document may violate laws that protect the intellectual property of ASME, ASSE, and CSA and may give rise to a right in ASME, ASSE, and CSA to seek legal redress for such use, modification, copying, or disclosure. ASME, ASSE, and CSA reserve all intellectual property rights in this document.

## Disclaimer and exclusion of liability

This document is provided without any representations, warranties, or conditions of any kind, express or implied, including, without limitation, implied warranties or conditions concerning this document's fitness for a particular purpose or use, its merchantability, or its non-infringement of any third party's intellectual property rights. ASME, ASSE, and CSA do not warrant the accuracy, completeness, or currency of any of the information published in this document. ASME, ASSE, and CSA make no representations or warranties regarding this document's compliance with any applicable statute, rule, or regulation.

IN NO EVENT SHALL ASME, ASSE, and CSA, THEIR RESPECTIVE VOLUNTEERS, MEMBERS, SUBSIDIARIES, OR AFFILIATED COMPANIES, OR THEIR EMPLOYEES, DIRECTORS, OR OFFICERS, BE LIABLE FOR ANY DIRECT, INDIRECT, OR INCIDENTAL DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES, HOWSOEVER CAUSED, INCLUDING BUT NOT LIMITED TO SPECIAL OR CONSEQUENTIAL DAMAGES, LOST REVENUE, BUSINESS INTERRUPTION, LOST OR DAMAGED DATA, OR ANY OTHER COMMERCIAL OR ECONOMIC LOSS, WHETHER BASED IN CONTRACT, TORT (INCLUDING NEGLIGENCE), OR ANY OTHER THEORY OF LIABILITY, ARISING OUT OF OR RESULTING FROM ACCESS TO OR POSSESSION OR USE OF THIS DOCUMENT, EVEN IF ASME OR CSA HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, INJURY, LOSS, COSTS, OR EXPENSES.

In publishing and making this document available, ASME, ASSE, and CSA are not undertaking to render professional or other services for or on behalf of any person or entity or to perform any duty owed by any person or entity to another person or entity. The information in this document is directed to those who have the appropriate degree of experience to use and apply its contents, and ASME, ASSE, and CSA accept no responsibility whatsoever arising in any way from any and all use of or reliance on the information contained in this document.

ASME, ASSE, and CSA have no power, nor do they undertake, to enforce compliance with the contents of the standards or other documents they jointly publish.

## Authorized use of this document

This document is being provided by ASME, ASSE, and CSA for informational and non-commercial use only. The user of this document is authorized to do only the following:

If this document is in electronic form:

- load this document onto a computer for the sole purpose of reviewing it;
- search and browse this document; and
- print this document if it is in PDF format.

Limited copies of this document in print or paper form may be distributed only to persons who are authorized by ASME, ASSE, and CSA to have such copies, and only if this Legal Notice appears on each such copy.

In addition, users may not and may not permit others to

- alter this document in any way or remove this Legal Notice from the attached standard;
- sell this document without authorization from ASME, ASSE, and CSA; or
- make an electronic copy of this document.

If you do not agree with any of the terms and conditions contained in this Legal Notice, you may not load or use this document or make any copies of the contents hereof, and if you do make such copies, you are required to destroy them immediately. Use of this document constitutes your acceptance of the terms and conditions of this Legal Notice.



# ***Standards Update Service***

*ASSE 1037-2015/*

*ASME A112.1037-2015/*

*CSA B125.37-15*

*February 2015*

**Title:** *Performance requirements for pressurized flushing devices for plumbing fixtures*

**Pagination:** **23 pages** (xii preliminary and 11 text), each dated **February 2015**

To register for e-mail notification about any updates to this publication

- go to **shop.csa.ca**
- click on **CSA Update Service**

The **List ID** that you will need to register for updates to this publication is **2422076**.

If you require assistance, please e-mail [techsupport@csagroup.org](mailto:techsupport@csagroup.org) or call 416-747-2233.

Visit CSA Group's policy on privacy at [csagroup.org/legal](http://csagroup.org/legal) to find out how we protect your personal information.





*ASSE 1037-2015/ASME A112.1037-2015/  
CSA B125.37-15*

***Performance requirements for pressurized  
flushing devices for plumbing fixtures***



**CSA  
Group**

<sup>TM</sup>A trade-mark of the Canadian Standards Association, operating as "CSA Group"

*Published in February 2015 by CSA Group  
A not-for-profit private sector organization  
178 Rexdale Blvd., Toronto, Ontario, Canada M9W 1R3  
1-800-463-6727 • 416-747-4044*

***Visit our Online Store at [shop.csa.ca](http://shop.csa.ca)***

## **Commitment for Amendments**

This Standard is issued jointly by The American Society of Mechanical Engineers (ASME), the ASSE International Chapter of IAPMO, LLC. (ASSE), and CSA Group. Amendments to this Standard will be made only after processing according to the Standards development procedures of ASME, ASSE, and CSA Group.

The American Society of Mechanical Engineers  
(ASME)  
Two Park Avenue  
New York, NY 10016-5990  
USA  
**[www.asme.org](http://www.asme.org)**

ISBN 978-0-7918-7012-9  
© 2015

The 2015 edition of this Standard is being issued with an automatic addenda subscription service. The use of addenda allows revisions made in response to public review comments or committee actions to be published as necessary.

Published in February 2015 by  
CSA Group  
A not-for-profit private sector organization  
178 Rexdale Boulevard  
Toronto, Ontario, Canada  
M9W 1R3  
1-800-463-6727 or 416-747-4044  
Visit the CSA Group Online Store at  
**[shop.csa.ca](http://shop.csa.ca)**

ISBN 978-1-77139-026-2  
© CSA Group — 2015

All rights reserved. No part of this publication may be reproduced in any form whatsoever without the prior permission of the publisher

ASSE International  
18927 Hickory Creek Dr, Suite 220  
Mokena, IL 60448  
Tel: (708) 995-3019  
Fax: (708) 479-6139

E-mail: [general.info@asse-plumbing.org](mailto:general.info@asse-plumbing.org)

**[www.asse-plumbing.org](http://www.asse-plumbing.org)**

© ASSE International— 2015



# Contents

ASME A112 Standards Committee on Plumbing Materials and Equipment v

CSA Technical Committee on Plumbing Fittings vii

ASSE Product Standards Committee x

ASME/ASSE/CSA Harmonization Task Group on Plumbing Fittings xi

Preface xii

## Section I 1

### 1 Scope 1

## Section II 1

### 2 Reference publications and definitions 1

2.1 Reference publications 1

2.2 Definitions 2

## Section III 3

### 3 Design and general requirements 3

3.1 Pressures 3

3.2 Temperatures 3

3.3 Backflow prevention 3

3.4 Accessible designs 3

3.5 Control stop 3

3.6 Connections to water supply and fixtures 3

3.6.1 Inlet connections 4

3.6.2 Outlet connections 4

3.7 Coatings 4

3.8 PFDs incorporating electrical features 4

3.8.1 General 4

3.8.2 Testing 4

## Section IV 4

### 4 Performance requirements and test methods 4

4.1 General 4

4.1.1 Preconditioning 4

4.1.2 Installation for testing 4

4.1.3 Test conditions 4

4.1.4 Order of tests 4

4.2 Pressure test 4

4.2.1 Purpose 4

4.2.2 Procedure 5

4.2.3 Performance criteria 5

4.3 Back siphonage test — Non-tank type PFDs 5

4.3.1 Purpose 5

4.3.2 Procedure 5

4.3.3	Performance criteria	5
4.4	Backflow test — Tank type PFDs	5
4.4.1	Purpose	5
4.4.2	Procedure	5
4.4.3	Performance criteria	6
4.5	Hydraulic performance tests	6
4.5.1	Purpose	6
4.5.2	Procedure	6
4.5.3	Performance criteria	6
4.6	Operating requirements	6
4.6.1	Purpose	6
4.6.2	Procedure	7
4.6.3	Performance criteria	7
4.7	Life cycle test	7
4.7.1	Purpose	7
4.7.2	Procedure	7
4.7.3	Performance criteria	8
4.8	Integral control stop life cycle test	8
4.8.1	Purpose	8
4.8.2	Procedure	8
4.8.3	Performance criteria	8
4.9	Hydrostatic pressure test for non-tank type PFDs	9
4.9.1	Purpose	9
4.9.2	Procedure	9
4.9.3	Performance criteria	9
4.10	Hydrostatic pressure test for tank type PFDs	9
4.10.1	Purpose	9
4.10.2	Procedure	9
4.10.3	Performance criteria	9

## **Section V** 9

## **5 Markings, packaging, and installation instructions** 9

5.1	Markings	9
5.2	Water consumption	10
5.3	Visibility of markings	10
5.4	Packaging	10
5.5	Installation instructions	10

---

## **Tables**

<b>1</b>	— Sequence for hydraulic performance tests	6
----------	--	---

---

## **Figures**

<b>1</b>	— Backflow test set up for tank type PFDs	10
<b>2</b>	— Swing check	11
<b>3</b>	— Poppet type check nozzle type body	11
<b>4</b>	— Poppet type flat or level seat body	11



# ***ASME A112 Standards Committee on Plumbing Materials and Equipment***

<b>D.W. Viola</b>	IAPMO, Mokena, Illinois, USA	<i>Chair</i>
<b>S. Rawalpindiwala</b>	Kohler Co., Kohler, Wisconsin, USA	<i>Vice-Chair</i>
<b>R.K. Adler</b>	City of San Jose, San Jose, California, USA	
<b>S.F. Aridi</b>	NSF International, Ann Arbor, Michigan, USA	
<b>J.A. Ballanco</b>	JB Engineering & Code Consulting, PC, Munster, Indiana, USA	
<b>J.E. Bertrand</b>	Moen Incorporated, North Olmsted, Ohio, USA	
<b>A. Bonlender</b>	Bradley Fixtures Corporation, Menomonee Falls, Wisconsin, USA	
<b>M.N. Burgess</b>	Burgess Group Incorporated, San Diego, California, USA	
<b>R. Burnham</b>	Zurn Industries LLC, Erie, Pennsylvania, USA	
<b>M. Campos</b>	ICC Evaluation Service, LLC, Whittier, California, USA	
<b>S.L. Cavanaugh</b>	Cavanaugh Consulting, Santa Fe, New Mexico, USA	
<b>W.E. Chapin</b>	Professional Code Consulting, LLC Cullman, AL, USA	
<b>P.V. DeMarco</b>	IAPMO, Dayton, New Jersey, USA	
<b>N.E. Dickey</b>	CSA Group, Cleveland, Ohio, USA	
<b>G.S. Duren</b>	Code Compliance, Inc., S Pasadena, Florida, USA	
<b>R. Emmerson</b>	Consultant, Mundelein, Illinois, USA	

<b>R.L. George</b>	Plumb-Tech Design and Consulting Services L.L.C, Newport, Michigan, USA	
<b>G.W. Harrison</b>	Wayne Harrison Consulting, Edmond, Oklahoma, USA	
<b>L. Himmelblau</b>	Chicago Faucet, Des Plaines, Illinois, USA	
<b>J. Kendzel</b>	American Society of Plumbing Engineers, Rosemont, Illinois, USA	
<b>J.M. Koeller</b>	Koeller and Co., Yorba Linda, California, USA	
<b>N.M. Kummerlen</b>	Consultant Lorain, Ohio, USA	
<b>C.J. Lagan</b>	American Standard, Piscataway, New Jersey, USA	
<b>J.W. Lauer</b>	Sloan Valve Company, Huntington Beach, California, USA	
<b>W.H. Levan</b>	Cast Iron Soil Pipe Institute, Hixon, Georgia, USA	
<b>S. Mata</b>	CSA Group, Cleveland, Ohio, USA	
<b>S.A. Remedios</b>	Remedios Consulting LLC, Noblesville, Indiana, USA	
<b>G.L. Simmons</b>	Charlotte Pipe & Foundry, Charlotte, North Carolina, USA	
<b>L.J. Swatkowski Jr.</b>	Plumbing Manufacturers International (PMI), Rolling Meadows, Illinois, USA	
<b>J.C. Watson</b>	Elkay, Broadview, Illinois, USA	
<b>M. Weiss</b>	Weiss Research, Polson, Montana, USA	
<b>W.C. Whitehead</b>	Whitehead Consulting Services, Peabody, Massachusetts, USA	
<b>A.L. Guzman</b>	American Society of Mechanical Engineers, New York, New York, USA	<i>Secretary</i>



# ***CSA Technical Committee on Plumbing Fittings***

<b>K. Ernst</b>	Oakville Stamping & Bending Limited, Oakville, Ontario, Canada	<i>Chair</i>
<b>B. Lagueux</b>	Saint-Nicolas, Québec, Canada Consumer Representative	<i>Vice-Chair</i>
<b>W. Ball</b>	Woodford Manufacturing Company, Colorado Springs, Colorado, USA	<i>Associate</i>
<b>J.E. Bertrand</b>	Moen Inc., North Olmsted, Ohio, USA	<i>Associate</i>
<b>A. Bonlender</b>	Bradley Corporation, Menomonee Falls, Wisconsin, USA	<i>Associate</i>
<b>R. Bratsch-Blundel</b>	George Brown College, Toronto, Ontario, Canada	
<b>S. Breda</b>	Breda & Associates Ltd., Downsview, Ontario, Canada	
<b>R. Burnham</b>	Zurn Industries LLC, Erie, Pennsylvania, USA	<i>Associate</i>
<b>M. Campos</b>	ICC Evaluation Service, LLC, Whittier, California, USA	<i>Associate</i>
<b>S.L. Cavanaugh</b>	Cavanaugh Consulting, Cullman, Alabama, USA	
<b>W.E. Chapin</b>	Professional Code Consulting, LLC, Worcester, Massachusetts, USA	<i>Associate</i>
<b>G. Darnowski</b>	Watts Water Technologies (Canada) Inc., Burlington, Ontario, Canada	<i>Associate</i>
<b>N. Dickey</b>	CSA Group, Independence, Ohio, USA	<i>Associate</i>
<b>J. Drumm</b>	City of Peterborough, Peterborough, Ontario, Canada	
<b>Y. Duchesne</b>	Régie du bâtiment du Québec, Québec, Québec, Canada	
<b>W. Falcomer</b>	City of Ottawa, Ottawa, Ontario, Canada	
<b>F. Fernández</b>	Toto USA Inc, Ontario, California, USA	<i>Associate</i>

<b>D. Green</b>	National Research Council Canada, Ottawa, Ontario, Canada	<i>Associate</i>
<b>L. Himmelblau</b>	Chicago Faucet Company, Des Plaines, Illinois, USA	
<b>E. Ho</b>	IAPMO Research and Testing, Inc., Markham, Ontario, Canada	<i>Associate</i>
<b>K.S. Hui</b>	Ontario Ministry of Municipal Affairs and Housing, Toronto, Ontario, Canada	
<b>A. Knapp</b>	A. Knapp & Associates, Toronto, Ontario, Canada	
<b>J. Knapton</b>	SAIT Polytechnic, Calgary, Alberta, Canada	
<b>N.M. Kummerlen</b>	Lorain, Ohio, USA	
<b>F. Lemieux</b>	Health Canada, Ottawa, Ontario, Canada	
<b>M. Malatesta</b>	American Standard, Piscataway, New Jersey, USA	<i>Associate</i>
<b>D. Marbry</b>	Fluidmaster Inc., San Juan Capistrano, California, USA	<i>Associate</i>
<b>D. McNamara</b>	Franke Kindred Canada Limited, Midland, Ontario, Canada	
<b>M. Mohammed</b>	Reliance Worldwide Canada Inc, Vaughan, Ontario, Canada	<i>Associate</i>
<b>S. O'Neill</b>	Mohawk College, Stoney Creek, Ontario, Canada	<i>Associate</i>
<b>D. Orton</b>	NSF International, Ann Arbor, Michigan, USA	<i>Associate</i>
<b>P. Paré</b>	Masco Canada Limited, St. Thomas, Ontario, Canada	
<b>S. Rawalpindiwala</b>	Kohler Co., Kohler, Wisconsin, USA	
<b>S.A. Remedios</b>	Remedios Consulting LLC, Noblesville, Indiana, USA	
<b>P. Saeed</b>	Powers (a division of Watts Water Technologies, Inc.), Des Plaines, Illinois, USA	
<b>R. Sparling</b>	Giffin Koerth Inc, Toronto, Ontario, Canada	



<b>J. St-Denis</b>	Intertek Testing Services, Lachine, Québec, Canada	<i>Associate</i>
<b>T. Stessman</b>	Kohler Co., Kohler, Wisconsin, USA	<i>Associate</i>
<b>L. Swatkowski</b>	Plumbing Manufacturers International, Rolling Meadows, Illinois, USA	<i>Associate</i>
<b>C.W. Trendelman</b>	Delta Faucet Company, Bargersville, Indiana, USA	<i>Associate</i>
<b>C. Tripodi</b>	Moen Incorporated, Oakville, Ontario, Canada	
<b>C. Wright</b>	Ontario Pipe Trades, Dundalk, Ontario, Canada	
<b>L. Pilla</b>	CSA Group, Mississauga, Ontario, Canada	<i>Project Manager</i>

# ***ASSE Product Standards Committee***

<b>E. Lyczko</b>	Cleveland Clinic (Ret.) Cleveland, Ohio, USA	<i>Chair</i>
<b>W. Briggs</b>	MGJ Associates, New York, New York, USA	
<b>T. Burger</b>	CSA Group Independence, Ohio, USA	
<b>M. Campos</b>	ICC Evaluation Service, LLC, Whittier, California, USA	
<b>W. Chapin</b>	Professional Code Consulting, LLC, Cullman, Alabama, USA	
<b>R. George</b>	Plumb-Tech Design & Consulting Services, LLC, Newport, Michigan, USA	
<b>D. Gleiberman</b>	Sloan Valve Company, Huntington Beach, California, USA	
<b>J.F. Higdon</b>	Apollo Valves/Conbraco Industries, Matthews, North Carolina, USA	
<b>C. Jahrling</b>	ASSE International, Mokena, Illinois, USA	
<b>J. Kendzel</b>	American Society of Plumbing Engineers, Des Plaines, Illinois, USA	
<b>C. Lott</b>	Precision Plumbing Products, Portland, Oregon, USA	
<b>P. Marzec</b>	New York Chapter — ASSE International, Pearl River, New York, USA	
<b>A. Murra</b>	IAPMO, Ontario, California, USA	
<b>B. Noll</b>	Wilkins / A Division of Zurn, Paso Robles, California, USA	
<b>T.C. Pitcherello</b>	Pennsylvania Chapter — ASSE International, Trenton, New Jersey, USA	
<b>S. Rawalpindiwala</b>	Kohler Company, Kohler, Wisconsin, USA	
<b>T-L Su</b>	Center for Environmental Systems, Hoboken, New Jersey, USA	



# ***ASME/ASSE/CSA Harmonization Task Group on Plumbing Fittings***

<b>W.J. Hall</b>	Leonard Valve Company, Cranston, Rhode Island, USA	<i>Co-Chair</i>
<b>F. Lemieux</b>	Health Canada, Ottawa, Ontario, Canada	<i>Co-Chair</i>
<b>M. Malatesta</b>	American Standard, Piscataway, New Jersey, USA	<i>Co-Chair</i>
<b>J.E. Bertrand</b>	Moen Inc., North Olmsted, Ohio, USA	
<b>M. Campos</b>	ICC Evaluation Service, LLC, Whittier, California, USA	
<b>W.E. Chapin</b>	Professional Code Consulting, LLC, Cullman, Alabama, USA	
<b>N. Dickey</b>	CSA Group, Cleveland, Ohio, USA	
<b>R. George</b>	Plumb-Tech Design & Consulting Services, LLC, Newport, Michigan, USA	
<b>L. Himmelblau</b>	Chicago Faucet Company, Des Plaines, Illinois, USA	
<b>J. Higdon</b>	Apollo Valves/Conbraco Industries, Matthews, North Carolina, USA	
<b>C. Jahrling</b>	ASSE International, Mokena, Illinois, USA	
<b>J. Kendzel</b>	American Society of Plumbing Engineers, Des Plaines, Illinois, USA	
<b>N.M. Kummerlen</b>	Lorain, Ohio, USA	
<b>E. Lyczko</b>	Cleveland Clinic (Ret.) Cleveland, Ohio, USA	
<b>D. Orton</b>	NSF International, Ann Arbor, Michigan, USA	
<b>S. Rawalpindiwala</b>	Kohler Co., Kohler, Wisconsin, USA	
<b>S.A. Remedios</b>	Remedios Consulting, LLC, Indianapolis, Indiana, USA	

**P. Saeed** Powers (a division of Watts Water  
Technologies, Inc.),  
Mt. Prospect, Illinois, USA

**L. Pilla** CSA Group,  
Mississauga, Ontario, Canada

*Project Manager*

# Preface

This is the first edition of ASSE 1037/ASME A112.1037/CSA B125.37, *Performance requirements for pressurized flushing devices for plumbing fixtures*. It supersedes the previous edition of ASSE 1037, published in 1990 and CSA B125.3, published in 2012.

This Standard is considered suitable for use with conformity assessment within the stated scope of the Standard.

This Standard was prepared by the ASSE/ASME/CSA Harmonization Task Group on Plumbing Fittings, under the jurisdiction of the ASME A112 Standards Committee on Plumbing Materials and Equipment, the ASSE Product Standards Committee, and the CSA Technical Committee on Plumbing Fittings. The CSA Technical Committee operates under the jurisdiction of the CSA Strategic Steering Committee on Construction and Civil Infrastructure.

This Standard has been formally approved by the ASME Standards Committee on Plumbing Materials and Equipment, the ASSE Product Standards Committee, and the CSA Technical Committee on Plumbing Fittings. This Standard was approved as an American National Standard by the American National Standards Institute on January 21, 2015.

## ASME Notes:

- (1) *This standard was developed under procedures accredited as meeting the criteria for American National Standards and it is an American National Standard. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed Standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.*
- (2) *ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.*
- (3) *ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.*
- (4) *Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this standard.*
- (5) *ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.*
- (6) *ASME issues written replies to inquiries concerning interpretation of technical aspects of this Standard. All inquiries regarding this Standard, including requests for interpretations, should be addressed to:*  
*Secretary, A112 Standards Committee*  
*The American Society of Mechanical Engineers Two Park Avenue*  
*New York, NY 10016-5990*

*A request for interpretation should be clear and unambiguous. The request should*

- cite the applicable edition of the Standard for which the interpretation is being requested.*
- phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings, which are necessary to explain the question; however, they should not contain proprietary names or information.*

*ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee.*

*Interpretations are published on the ASME Web site under the Committee Pages at <http://cstools.asme.org/> as they are issued.*

## CSA Notes:

- (1) *Use of the singular does not exclude the plural (and vice versa) when the sense allows.*
- (2) *Although the intended primary application of this Standard is stated in its Scope, it is important to note that it remains the responsibility of the users of the Standard to judge its suitability for their particular purpose.*

- (3) This Standard was developed by consensus, which is defined by CSA Policy governing standardization — Code of good practice for standardization as “substantial agreement. Consensus implies much more than a simple majority, but not necessarily unanimity”. It is consistent with this definition that a member may be included in the Technical Committee list and yet not be in full agreement with all clauses of this Standard.
- (4) To submit a request for interpretation of this Standard, please send the following information to [inquiries@csagroup.org](mailto:inquiries@csagroup.org) and include “Request for interpretation” in the subject line:
- (a) define the problem, making reference to the specific clause, and, where appropriate, include an illustrative sketch;
  - (b) provide an explanation of circumstances surrounding the actual field condition; and
  - (c) where possible, phrase the request in such a way that a specific “yes” or “no” answer will address the issue.
- Committee interpretations are processed in accordance with the CSA Directives and guidelines governing standardization and are available on the Current Standards Activities page at [standardsactivities.csa.ca](http://standardsactivities.csa.ca).
- (5) This Standard is subject to review five years from the date of publication. Suggestions for its improvement will be referred to the appropriate committee. To submit a proposal for change, please send the following information to [inquiries@csagroup.org](mailto:inquiries@csagroup.org) and include “Proposal for change” in the subject line:
- (a) Standard designation (number);
  - (b) relevant clause, table, and/or figure number;
  - (c) wording of the proposed change; and
  - (d) rationale for the change.

**ASSE Notes:****(1) Requests for interpretation**

Requests for interpretation may be sent to any of the (3) standards organizations. All interpretations are reviewed and agreed upon by the ASSE International, ASME, and CSA prior to response. Requests for interpretations may be sent to:

Staff Engineering Group  
ASSE International  
18927 Hickory Creek Drive, Suite 220  
Mokena, IL 60448-8399

Requests must include:

- Name and contact information of the individual requesting the interpretation;
- Name of organization the individual represents (if any);
- Appropriate references to the standard's clauses that have a bearing on the issue cited in the request;
- A concise explanation of the issue requiring a technical interpretation;
- Any supporting documentation that will assist in understanding or describing the issue;
- Any recommendations the requestor would like to make concerning a possible technical interpretation, along with appropriate justification or comments.

Forms for requests or general guidance can be obtained by emailing [staffengineer@asse-plumbing.org](mailto:staffengineer@asse-plumbing.org).

**(2) Endorsement vs. Listing**

ASSE International does not endorse any product, but rather lists products that have successfully been applied for and meet the given standard. In exchange the manufacturer is allowed to place the ASSE Seal with the given standard number on their product for public recognition.

In order to apply for listing, visit [www.asse-plumbing.org/seal/listing\\_instructions.html](http://www.asse-plumbing.org/seal/listing_instructions.html).

**(3) Patent rights**

ASSE International complies with Section 3.1 of ANSI Essential Requirements — Inclusion of Patents in American National Standards. To understand what is and is not covered, visit [www.ansi.org/essentialrequirements](http://www.ansi.org/essentialrequirements).

**(4) Committee or Working Group Membership**

Each standard is developed by a working group and then approved by the Product Standards Committee and Board of Directors of ASSE International. In order to apply for membership on a working group or any committee, the applications are available at

[www.asse-plumbing.org/standards/WorkingGroupApp.pdf](http://www.asse-plumbing.org/standards/WorkingGroupApp.pdf).



# *ASSE 1037-2015/ASME A112.1037-2015/ CSA B125.37-15*

## ***Performance requirements for pressurized flushing devices for plumbing fixtures***

### **Section I**

#### **1 Scope**

##### **1.1**

This Standard covers pressurized flushing devices (PFDs) intended to flush water closets, urinals, and other plumbing fixtures and specifies requirements for materials, design, methods of operation, test methods, and markings.

##### **1.2**

In this Standard, “shall” is used to express a requirement, i.e., a provision that the user is obliged to satisfy in order to comply with the standard; “should” is used to express a recommendation or that which is advised but not required; and “may” is used to express an option or that which is permissible within the limits of the standard.

Notes accompanying sections do not include requirements or alternative requirements; the purpose of a note accompanying a section is to separate from the text explanatory or informative material.

Notes to tables and figures are considered part of the table or figure and may be written as requirements.

Annexes are designated normative (mandatory) or informative (non-mandatory) to define their application.

##### **1.3**

SI units are the units of record in Canada. In this Standard the inch/pound units are shown in parentheses.

The values stated in each measurement system are equivalent in application; however, each system is to be used independently. Combining values from the two measurement systems can result in non-conformance with this Standard. All references to gallons are to U.S. gallons.

### **Section II**

#### **2 Reference publications and definitions**

##### **2.1 Reference publications**

This Standard refers to the following publications, and where such reference is made, it shall be to the edition listed below, including all amendments published thereto.

**ASME (The American Society of Mechanical Engineers)/CSA Group**

ASME A112.18.1-2012/CSA B125.1-12

*Plumbing supply fittings*

ASME A112.19.2-2013/CSA B45.1-13

*Ceramic plumbing fixtures*

**ASME (The American Society of Mechanical Engineers)**

A112.18.3-2002 (R2012)

*Performance requirements for backflow protection devices and systems in plumbing fixture fittings*

A112.19.14-2006 (R2011)

*Six-liter water closets equipped with a dual flushing device*

B1.1-2008

*Unified Inch Screw Threads (UN & UNR Thread Form)*

B1.20.1-2013

*Pipe Threads, General Purpose (Inch)*

B16.18-2012

*Cast Copper Alloy Solder Joint Pressure Fittings*

B16.22-2013

*Wrought Copper and Copper Alloy Solder Joint Pressure Fittings*

**ASSE (ASSE International Chapter of IAPMO, LLC.)**

1001-2008

*Performance Requirements for Atmospheric Type Vacuum Breakers*

*Plumbing Dictionary Sixth Edition — 2007*

**CSA Group**

B64 Series-11

*Backflow preventers and vacuum breakers*

B64.1.1-11

*Atmospheric vacuum breakers (AVB)*

**SAE International (Society of Automotive Engineers)**

J512 (1997)

*Automotive Tube Fittings*

## 2.2 Definitions

In addition to the definitions in the reference publications, the following definitions shall apply in this Standard:

**Back siphonage** — backflow caused by below-atmospheric pressure in the water system.

**Backflow** — a flowing back or reversal of the normal direction of flow.

**Note:** *Back siphonage and back pressure are types of backflow.*

**Critical level (CL)** — the lowest water level in a fitting at which back siphonage will not occur.

**Pressurized flushing device** — a device that utilizes the water supply pressure to flush plumbing fixtures.

**Non-tank type PFD (Flushometer valve)** — a pressurized flushing device that is attached to a pressurized water supply pipe that, when actuated, opens the pipe for direct flow of water into the fixture at a rate and in a quantity that enables proper operation of the fixture. The valve then gradually closes to provide trap reseal in the fixture and avoid water hammer.

**Tank type PFD (Flushometer tank)** — a pressurized flushing device in a pressurized water supply pipe but integrated within an accumulator vessel affixed and adjacent to the fixture inlet to cause an effective enlargement of the supply line. The discharge directs the flow of water into the fixture at a rate and in a quantity that enables proper operation of the fixture. The valve then gradually closes to provide trap reseal in the fixture and avoid water hammer.

**Primary control** — the standard means by which the PFD is activated as designated by the manufacturer.

**Secondary control** — an alternative means by which the PFD is activated as designated by the manufacturer.

## Section III

### 3 Design and general requirements

#### 3.1 Pressures

PFDs shall be designed to function at a supply pressure between 140 and 860 kPa (20 and 125 psi). In addition, PFDs shall comply with [Clause 4.2](#).

#### 3.2 Temperatures

PFDs shall be designed to function with water temperature between 4 °C and 30 °C (40°F and 85°F).

#### 3.3 Backflow prevention

PFDs incorporating backflow preventers shall comply with the requirements of [Clause 4.3](#) or [4.4](#). When a backflow preventer is not incorporated in the PFD, installation instructions shall identify the specific types of backflow prevention required.

#### 3.4 Accessible designs

Operating controls intended for use in accessible designs shall

- (a) be automatically controlled; or
- (b) meet the following requirements:
  - (i) be operable with one hand;
  - (ii) not require tight grasping, pinching, or twisting of the wrist; and
  - (iii) require an operating force not greater than 22N (5 lbf)

#### 3.5 Control stop

If the manufacturer provides a control stop with the PFD, it shall be considered part of the PFD.

#### 3.6 Connections to water supply and fixtures

Tapered pipe threads shall conform to ASME B1.20.1. Straight threads shall conform to ASME B1.1. Dimensions of solder-joint connections shall conform to ASME B16.18 or ASME B16.22. Compression connections shall be compatible with SAE J512.



### 3.6.1 Inlet connections

Inlet supply connections shall be as specified by the PFD manufacturer.

### 3.6.2 Outlet connections

Outlet connections shall provide pressure-tight connections to the fixture to which it is assembled, as specified in ASME A112.19.2/CSA B45.1.

### 3.7 Coatings

Coatings shall comply with the applicable requirements of ASME A112.18.1/CSA B125.1.

## 3.8 PFDs incorporating electrical features

### 3.8.1 General

PFDs incorporating electric features shall comply with the applicable requirements of ASME A112.18.1/CSA B125.1.

### 3.8.2 Testing

When used with a PFD, electrical plumbing controls, including solenoid valves, shall

- (a) be considered components of the PFD;
- (b) be tested with the PFD; and
- (c) comply with [Clause 4.7](#).

Replacement of a battery during any of the testing required by this section shall not be considered a failure of the PFD.

## Section IV

## 4 Performance requirements and test methods

### 4.1 General

#### 4.1.1 Preconditioning

Before testing, specimens shall be conditioned at ambient laboratory conditions for at least 12 h.

#### 4.1.2 Installation for testing

For test purposes, specimens shall be installed in accordance with the manufacturer's instructions. All intervals between discharges shall be sufficient so as to allow the PFD to complete its flushing cycle.

#### 4.1.3 Test conditions

All tests shall be conducted using water temperatures between 4 °C and 30 °C (40°F and 85°F), unless otherwise specified in this test procedure.

#### 4.1.4 Order of tests

Tests shall be conducted on the same specimen, in the order listed in this Standard.

### 4.2 Pressure test

#### 4.2.1 Purpose

The purpose of this test is to determine if the PFD operates across its required pressure range.



### 4.2.2 Procedure

The pressure test shall be conducted as follows:

- (a) Install the test specimen on a test stand with the PFD discharging to atmosphere.
- (b) Operate the PFD (i.e., allow it to complete its flushing cycle) at a static pressure of  $140 \pm 14$  kPa ( $20 \pm 2$  psi).
- (c) Repeat Item (b) at a static pressure of  $860 \pm 14$  kPa ( $125 \pm 2$  psi).
- (d) Subject the PFD to a static pressure of  $140 \pm 14$  kPa ( $20 \pm 2$  psi).
- (e) Hold for 5 min.
- (f) Repeat Item (b) at a static pressure of  $860 \pm 14$  kPa ( $125 \pm 2$  psi).
- (g) Observe for leakage.

### 4.2.3 Performance criteria

Failure to complete the flushing cycle or any leakage shall result in a rejection of the PFD.

## 4.3 Back siphonage test — Non-tank type PFDs

### 4.3.1 Purpose

The purpose of this test is to ensure that the PFD incorporates a means to protect against back siphonage except as specified in [Clause 3.3](#).

### 4.3.2 Procedure

Non-tank type PFDs shall comply with the back siphonage performance requirements in ASME A112.18.3, ASSE 1001, or CSA B64.1.1.

### 4.3.3 Performance criteria

Failure to comply with the applicable back siphonage requirements of the applicable standards specified in [Clause 4.3.2](#) shall result in a rejection of the PFD.

## 4.4 Backflow test — Tank type PFDs

### 4.4.1 Purpose

The purpose of this test is to ensure that the PFD incorporates a means to protect against back siphonage and backpressure.

### 4.4.2 Procedure

The backflow test for tank type PFDs shall be conducted as follows:

- (a) Install the test specimen in accordance with [Figure 1](#).
- (b) Foul all checking members with a 0.8 mm (0.032 in) diameter 100% copper wire formed to the sealing surface of the check being tested and in the proper location for the type of valve construction, as illustrated in [Figure 2](#), [3](#), or [4](#).
- (c) Add a dye solution to the tank.
- (d) Pressurize the tank to the manufacturer's recommended working pressure to establish the normal water level in the PFD tank.
- (e) Apply a vacuum of 85 kPa (12 psi) and maintained for at least 1 min.
- (f) Slowly apply a vacuum (not less than 5 s) from 0 kPa to 85 kPa (0 psi to 12 psi)
- (g) Slowly reduce the vacuum from 85 kPa to 0 kPa (12 psi to 0 psi).
- (h) Create a surge effect by quickly (less than 1 s) opening and closing a quick-acting valve. During this step, the vacuum shall range between 85 kPa and 0 kPa (12 psi and 0 psi).

**Note:** 85 kPa (12 psi) is equivalent to 638 mm (25 in) of mercury.

### 4.4.3 Performance criteria

Any coloured water in the sight glass during the tests specified in [Clause 4.4.2](#) shall result in a rejection of the PFD.

## 4.5 Hydraulic performance tests

### 4.5.1 Purpose

The purpose of this test is to determine the PFD's hydraulic performance.

### 4.5.2 Procedure

The hydraulic performance test shall be conducted

- (a) in accordance with the applicable performance tests specified in ASME A112.19.2/CSA B45.1, for single-flush PFDs;
- (b) in accordance with the applicable performance tests specified in ASME A112.19.14, for dual-flush PFDs;
- (c) using three fixtures;
  - (i) complying with ASME A112.19.2/CSA B45.1; and
  - (ii) manufactured by different manufacturers; and
- (d) following the sequence specified in [Table 1](#) for each type of PFD, depending on the fixture on which it is intended to be installed.

### 4.5.3 Performance criteria

Failure to comply with the performance requirements of ASME A112.19.2/CSA B45.1 or, for dual flush function PFDs, ASME A112.19.14, shall result in a rejection of the PFD.

**Table 1**  
**Sequence for hydraulic performance tests**  
 (See [Clause 4.5.2.](#))

Water closet PFDs	Urinal PFDs	Dual flush PFDs	
		Full flush mode	Reduced flush mode
Trap seal depth determination	Trap seal depth determination	Trap seal depth determination	Trap seal restoration
Water consumption	Surface wash	Water consumption	Reduced flush volume
Granule and ball	Dye	Granule and ball	Dye
Surface wash	Water consumption	Surface wash	Toilet paper
Mixed media		Mixed media	
Drain line transport characterization		Drain line transport characterization	

## 4.6 Operating requirements

### 4.6.1 Purpose

The purpose of this test is to determine the torque or force required to open, operate, and close a manually activated primary control.



## 4.6.2 Procedure

The operating (torque) test shall be conducted in an ambient environment of  $20 \pm 5$  °C ( $68 \pm 9$ °F), as follows:

- (a) Install the test specimen on a test stand with the PFD discharging to atmosphere.
- (b) Bring the test specimen to equilibrium test temperatures by running water through it.
- (c) Determine the torque or force to operate a manually activated operating control by testing with water running as follows:
  - (i)  $140 \pm 14$  kPa and  $15 \pm 6$  °C ( $20 \pm 2$  psi and  $59 \pm 10$ °F); and
  - (ii)  $550 \pm 14$  kPa and  $15 \pm 6$  °C ( $80 \pm 2$  psi and  $59 \pm 10$ °F).

## 4.6.3 Performance criteria

### 4.6.3.1

For primary controls of non-accessible design PFDs, the linear force shall not exceed 90 N (20 lbf).

### 4.6.3.2

For primary controls of accessible design PFDs, the linear force shall not exceed 22 N (5 lbf).

## 4.7 Life cycle test

### 4.7.1 Purpose

The purpose of this test is to determine if there is any deterioration in the performance of the PFD through the life cycle testing.

### 4.7.2 Procedure

#### 4.7.2.1 Test set-up

The PFD for the life cycle test shall be set up as follows:

- (a) Install the test specimen on a test stand with the PFD discharging to atmosphere.
- (b) Connect the PFD to a  $172 \pm 14$  kPa ( $25 \pm 2$  psi) flowing supply pressure at  $15 \pm 6$  °C ( $59 \pm 10$ °F).
- (c) Flush the PFD at least five times to hydraulically balance it.
- (d) Once hydraulically balanced, flush the PFD five consecutive times.
- (e) Measure the volume of each flush.
- (f) Average the five flush volumes and record the average flush volume of the PFD. For dual flush PFDs, measure and average the flush volumes for five full flushes then measure and average the flush volumes for five reduced flushes.

#### 4.7.2.2 Procedure for PFDs with a primary control only

The life cycle test for PFDs with a primary control only shall be conducted as follows:

- (a) Subject the PFD 250,000 cycles of operation.
- (b) After every 25,000 cycles,
  - (i) record the average flush volume of three consecutive flushes; and
  - (ii) observe the PFD for leakage .
- (c) For dual flush PFDs, use the following cycling sequence:
  - (i) 25,000 cycles in full-flush mode;
  - (ii) 100,000 cycles in reduced-flush mode;
  - (iii) 25,000 cycles in full-flush mode; and
  - (iv) 100,000 cycles in reduced-flush mode.
- (d) Compare the average flush volumes at each stage with the average discharge volumes recorded in accordance with [Clause 4.7.2.1\(f\)](#).



#### 4.7.2.3 Procedure for PFDs with an optional secondary control

When the PFD is equipped with a secondary control, the secondary control shall be subjected to 2,500 cycles of operation upon the completion of the test specified in [Clause 4.7.2.2](#). At the end of the 2,500 cycles, the average flush volume of three consecutive flushes shall be recorded.

#### 4.7.2.4 Subsequent tests

Upon completion of the test specified in [Clause 4.7.2.2](#) and, when applicable, in [Clause 4.7.2.3](#), the following tests shall be conducted again:

- (a) Pressure test, for all PFDs ([Clause 4.2](#));
- (b) Back siphonage test, for non-tank type PFDs ([Clause 4.3](#));
- (c) Backflow test, for tank type PFDs ([Clause 4.4](#)); and
- (d) Operating requirements test, for the PFD ([Clause 4.6](#)).

#### 4.7.3 Performance criteria

Sticking, chattering, or leaking during or at the conclusion of the life cycle test shall result in a rejection of the PFD.

For flush volumes

- (a) greater than 2 L (0.5 gal), the average flush volume at each recorded stage varying by more than 10% shall result in a rejection of the device; and
- (b) 2 L (0.5 gal) or less, the average flush volume at each recorded stage shall not vary by more than 20%.

Failure to meet the criteria specified in [Clauses 4.2, 4.3, 4.4, and 4.6](#) at the completion of the life cycle test shall result in rejection of the PFD.

### 4.8 Integral control stop life cycle test

#### 4.8.1 Purpose

The purpose of this test is to ensure that optional integral control stops are operable for a specified minimum number of cycles.

#### 4.8.2 Procedure

The life cycle test for integral control stops for PFDs shall be conducted as follows:

- (a) Install the test specimen on a test stand with the PFD discharging to atmosphere.
- (b) Position the integral control stop in the closed position.
- (c) Pressurize the control stop to  $860 \pm 35$  kPa ( $125 \pm 5$  psi).
- (d) Check for leaks:
- (e) Reduce the pressure  $415 \pm 20$  kPa ( $60 \pm 3$  psi).
- (f) Operate the control stop for 500 cycles, as follows:
  - (i) One complete cycle shall be operating the control stop from the fully closed position to at least 80% of the fully open position, without making contact with the end stops, and back to the fully closed position.
  - (ii) The rate of opening and closing the control stop should not exceed 250 cycles per hour to effectively simulate its manual operation.
- (g) Upon completion of the 500 cycles of operation,
  - (i) close the control stop;
  - (ii) pressurize the control stop to  $860 \pm 35$  kPa ( $125 \pm 5$  psi);
  - (iii) maintain the pressure for 5 min; and
  - (iv) check for leaks.

#### 4.8.3 Performance criteria

Any sign of leakage from the control stop shall result in a rejection of the PFD.



## 4.9 Hydrostatic pressure test for non-tank type PFDs

### 4.9.1 Purpose

The purpose of the hydrostatic pressure test for non-tank type PFDs is to determine if the PFD is capable of withstanding a hydrostatic test pressure of 3,450 kPa (500 psi).

### 4.9.2 Procedure

The hydrostatic pressure test for non-tank type PFDs shall be conducted as follows:

- (a) Close the PFD.
- (b) Pressurize the PFD to a hydrostatic pressure of  $3,450 \pm 35$  kPa ( $500 \pm 5$  psi) through the inlet. Maintain the pressure for 1 min.

### 4.9.3 Performance criteria

Any leakage shall result in a rejection of the PFD.

## 4.10 Hydrostatic pressure test for tank type PFDs

### 4.10.1 Purpose

The purpose of the hydrostatic pressure test for tank type PFDs is to determine if the PFD is capable of withstanding a hydrostatic test pressure of 3,450 kPa (500 psi) or two times the minimum relief valve opening pressure, but in no case less than 550 kPa (80 psi).

### 4.10.2 Procedure

The hydrostatic pressure test for tank type PFDs shall be conducted as follows:

- (a) Remove or deactivate for PFDs that incorporate such devices.
- (b) Increase the pressure at the inlet by increments of 7 kPa (1 psi) per second, from 0 kPa (0 psi) until the relief valve is discharging at a flow rate of at least 5 mL/min (0.17 oz/min).
- (c) Record the pressure in Item (b) and name it as the minimum relief valve opening pressure.
- (d) Block the outlet of the relief valve.
- (e) Pressurize the PFD to a hydrostatic pressure of two times the minimum relief valve opening pressure, but not less than 550 kPa (80 psi).
- (f) Maintain the pressure for 5 min.
- (g) For PFDs without a relief valve, slowly increase the pressure to  $3,450 \pm 35$  kPa ( $500 \pm 5$  psi).
- (h) Maintain the pressure for 1 min.

### 4.10.3 Performance criteria

Any leakage through the PFD's body shall result in a rejection of the PFD.

## Section V

## 5 Markings, packaging, and installation instructions

### 5.1 Markings

PFDs complying with this Standard shall be marked with

- (a) the manufacturer's name, trademark, or other mark or, in the case of private labeling, the name, trademark, or other mark of the customer for whom the PFD was manufactured;
- (b) a line and the letters "CL"\* to indicate the critical level on PFDs with vacuum breakers (i.e., air inlet ports) intended for installation in potable water systems. as determine in [Clause 4.3.2](#)

\*The equivalent French wording is "NC".

- (c) identification of flush mode options shall be depicted on the actuator of manually activated dual flush function PFDs. This identification shall be either by graphic display or lettering, or shall be intuitively apparent.

## 5.2 Water consumption

All PFDs complying with this Standard shall be marked to identify their average water consumption in litres per flush (Lpf) and gallons per flush (gpf) as determined in [Clause 4.5](#).

## 5.3 Visibility of markings

Markings shall be permanent, legible, and visible after installation.


## 5.4 Packaging

Packaging shall be marked with the

- (a) manufacturer's name, trademark, or other mark or, in the case of private labeling, the name, trademark, or other mark of the customer for whom the PFD was manufactured; and
- (b) model name or series number, and water consumption in litres per flush (Lpf) and gallons per flush (gpf).

## 5.5 Installation instructions


The manufacturer shall provide installation instructions with PFDs. See [Clause 3.3](#) Backflow Prevention for additional requirements for instructions.

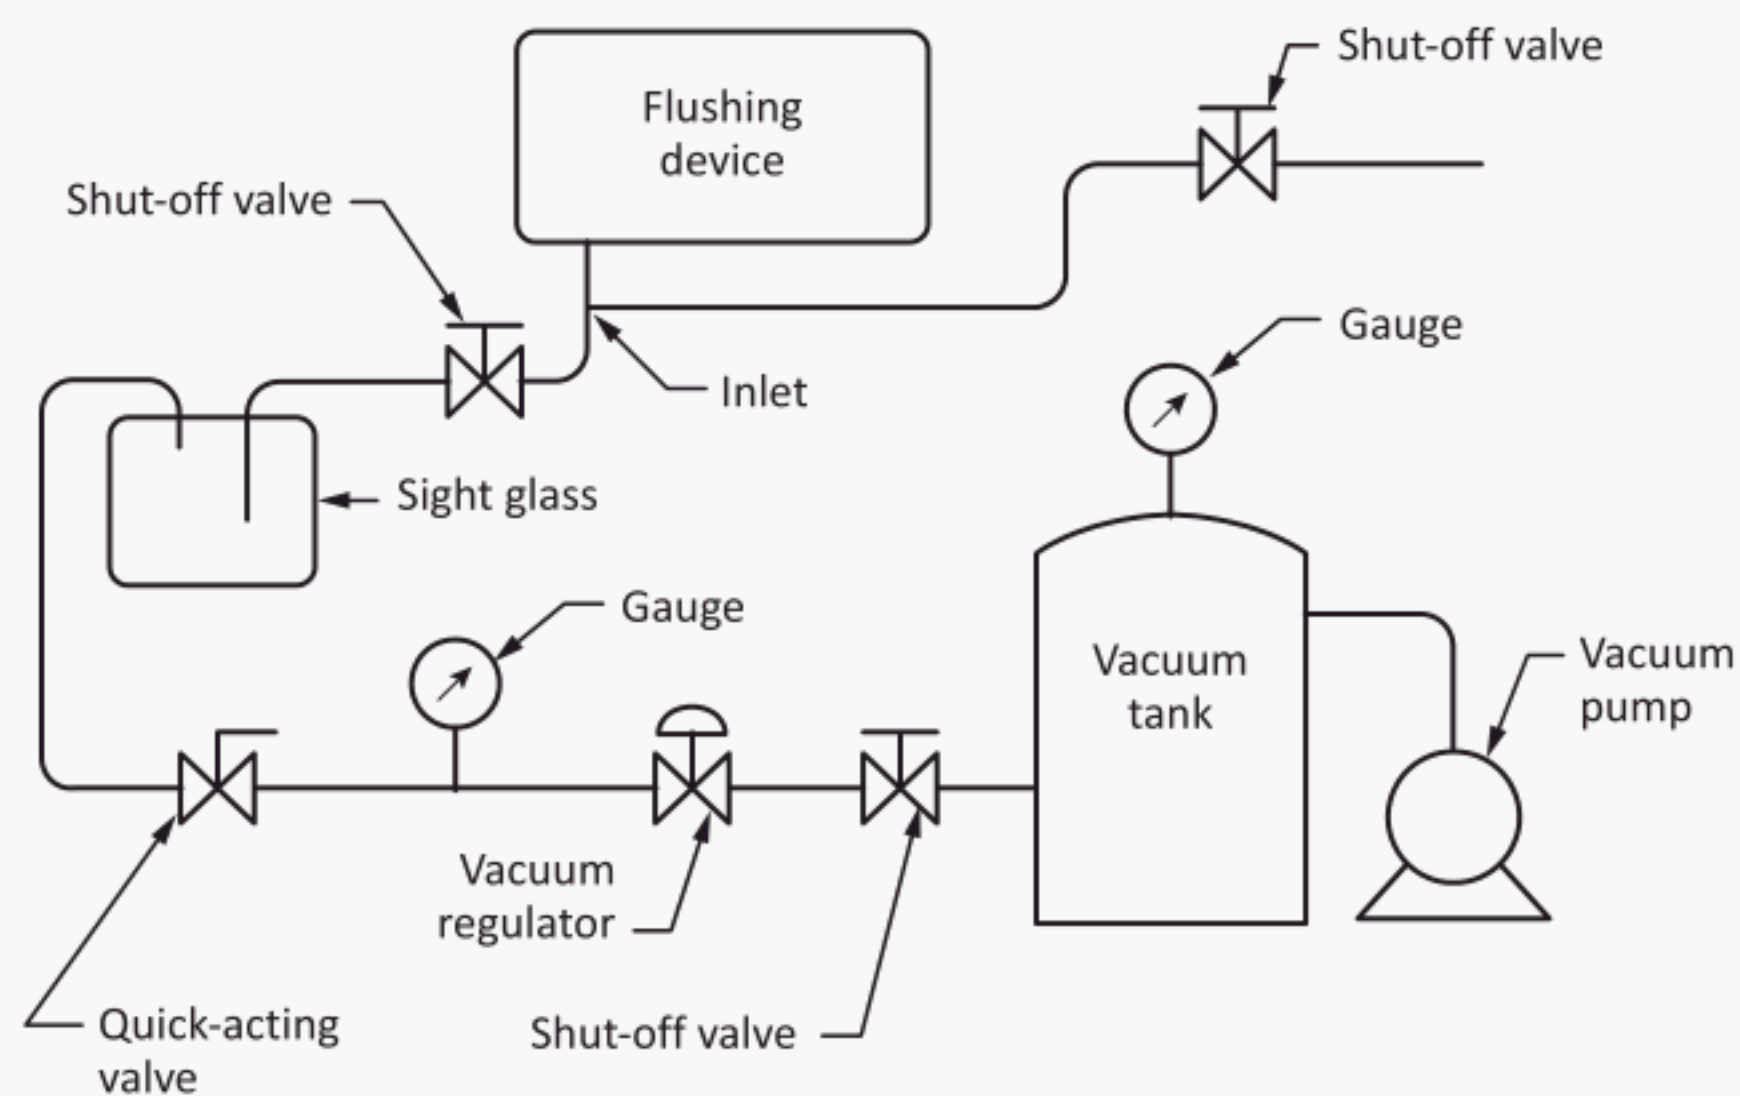

**Figure 1**  
**Backflow test set up for tank type PFDs**  
(See [Clause 4.4.2](#).)




**Swing check**

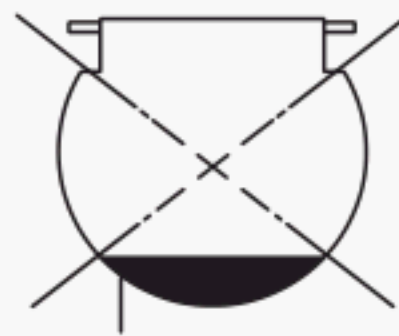

Test wire to be  
placed across the  
seat at this point


**Figure 2**  
**Swing check**  
(See [Clause 4.4.2.](#))

**Poppet type check  
Nozzle type body**

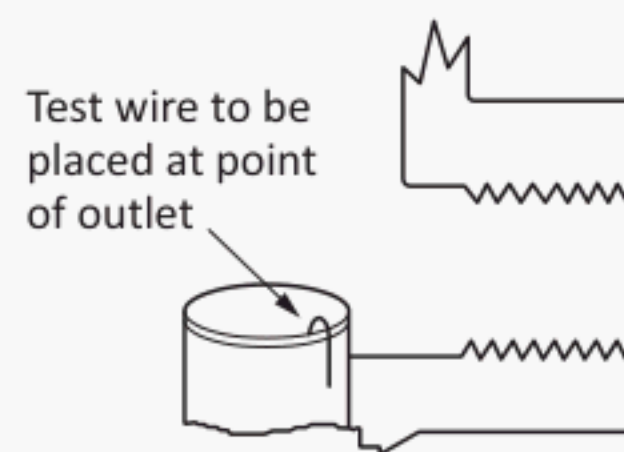

**Figure 3**  
**Poppet type check nozzle type body**  
(See [Clause 4.4.2.](#))

**Poppet type  
Flat or level seat body**

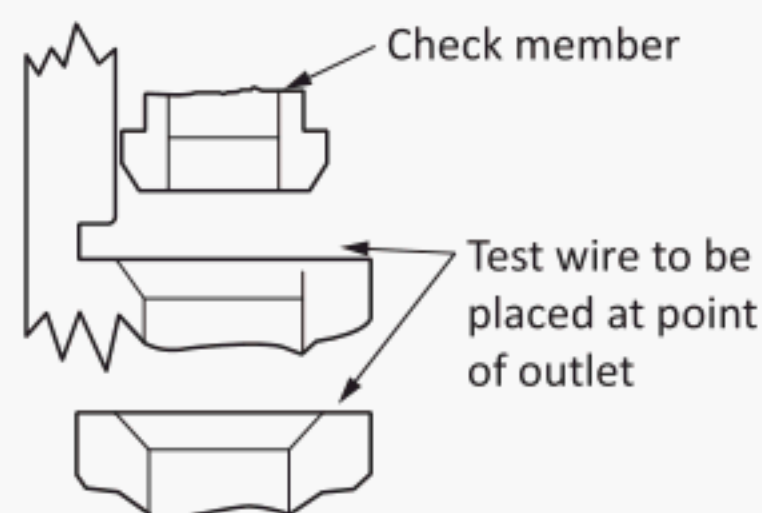

**Figure 4**  
**Poppet type flat or level seat body**  
(See [Clause 4.4.2.](#))







ISBN 978-0-7918-7012-9



9 780791 870129



J1891Q

*CSA Group prints its publications on recycled stock, which contains 100% post-consumer fibre and is Processed Chlorine Free (PCF).*



ISBN 978-1-77139-026-2