

**ASME B30.25-2003**  
**(Revision of ASME B30.25-1998)**

# **SCRAP AND MATERIAL HANDLERS**

**AN AMERICAN NATIONAL STANDARD**















The American Society of  
Mechanical Engineers

A N A M E R I C A N N A T I O N A L S T A N D A R D

# SCRAP AND MATERIAL HANDLERS

**ASME B30.25-2003**  
(Revision of ASME B30.25-1998)

**SAFETY STANDARD FOR CABLEWAYS, CRANES, DERRICKS, HOISTS, HOOKS, JACKS, AND SLINGS**

Date of Issuance: March 12, 2003

The next edition of this Standard is scheduled for publication in 2006. There will be no addenda issued to this edition.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this Standard. Interpretations are published on the ASME Web site under the Committee Pages at <http://www.asme.org/codes/> as they are issued, and will also be published within the next edition of the Standard.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,  
in an electronic retrieval system or otherwise,  
without the prior written permission of the publisher.

The American Society of Mechanical Engineers  
Three Park Avenue, New York, NY 10016-5990

Copyright © 2003 by  
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS  
All rights reserved  
Printed in U.S.A.

# CONTENTS

Foreword .....	iv
Committee Roster .....	v
Introduction .....	vii
Summary of Changes .....	x
<b>Chapter 25-0 Scope, Definitions, and References .....</b>	<b>1</b>
Section 25-0.1 Scope of B30.25 .....	1
Section 25-0.2 Definitions .....	1
Section 25-0.3 References .....	6
<b>Chapter 25-1 Construction and Characteristics .....</b>	<b>10</b>
Section 25-1.1 Lift Capacity .....	10
Section 25-1.2 Backward Stability .....	10
Section 25-1.3 Swing Mechanism .....	11
Section 25-1.4 Handler Travel .....	11
Section 25-1.5 Controls .....	11
Section 25-1.6 Cabs .....	12
Section 25-1.7 General Requirements .....	15
Section 25-1.8 Electrical Equipment .....	16
Section 25-1.9 Instruction Manuals .....	16
<b>Chapter 25-2 Inspection, Testing, and Maintenance .....</b>	<b>18</b>
Section 25-2.1 Inspection .....	18
Section 25-2.2 Testing .....	19
Section 25-2.3 Maintenance .....	19
<b>Chapter 25-3 Operation .....</b>	<b>21</b>
Section 25-3.1 Qualifications for and Conduct of Operators and Operating Practices ....	21
Section 25-3.2 Handling the Load .....	21
Section 25-3.3 Signals .....	22
Section 25-3.4 Miscellaneous .....	22
<b>Figures</b>	
1 Crawler-Mounted Handler .....	2
2 Pedestal-Mounted Handler .....	3
3 Rail-Mounted Handler .....	4
4 Wheel-Mounted Handler (Multiple Control Stations) .....	5
5 Wheel-Mounted Handler (Single Control Station) .....	6
6 Two-Piece Front .....	7
7 Three-Piece Front .....	8
8 Wheel-Mounted Handler — Primary Travel Control Diagram .....	13
9 Track-Mounted Handler — Primary Travel Control Diagram .....	14
10 Primary Front Controls — Three-Piece Fronts .....	14
11 Primary Front Controls — Two-Piece Fronts .....	15
12 Material Handler Hand Signals .....	23
<b>Table</b>	
1 Required Clearance for Normal Voltage in Operation Near High Voltage Power Lines .....	26

# FOREWORD

This American National Standard, Safety Standard for Cableways, Cranes, Derricks, Hoists, Hooks, Jacks, and Slings, has been developed under the procedures accredited by the American National Standards Institute (formerly the United States of America Standards Institute). This Standard had its beginning in December 1916 when an eight-page Code of Safety Standards for Cranes, prepared by an ASME Committee on the Protection of Industrial Workers, was presented to the annual meeting of the ASME.

Meetings and discussions regarding safety on cranes, derricks, and hoists were held from 1920 to 1925, involving the ASME Safety Code Correlating Committee, the Association of Iron and Steel Electrical Engineers, the American Museum of Safety, the American Engineering Standards Committee (later changed to American Standards Association and subsequently to the USA Standards Institute), Department of Labor — State of New Jersey, Department of Labor and Industry — State of Pennsylvania, and the Locomotive Crane Manufacturers Association. On June 11, 1925, the American Engineering Standards Committee approved the ASME Safety Code Correlating Committee's recommendation and authorized the project with the U.S. Department of the Navy, Bureau of Yards and Docks, and ASME as sponsors.

In March 1926, invitations were issued to 50 organizations to appoint representatives to a Sectional Committee. The call for organization of this Sectional Committee was sent out October 2, 1926, and the committee organized November 4, 1926, with 57 members representing 29 national organizations. The Safety Code for Cranes, Derricks, and Hoists, ASA B30.2-1943, was created from the eight-page document referred to in the first paragraph. This document was reaffirmed in 1952 and widely accepted as a safety standard.

Due to changes in design, advancement in techniques, and general interest of labor and industry in safety, the Sectional Committee, under the joint sponsorship of ASME and the Naval Facilities Engineering Command, U.S. Department of the Navy, was reorganized as an American National Standards Committee on January 31, 1962, with 39 members representing 27 national organizations.

The format of the previous code was changed so that separate volumes (each complete as to construction and installation; inspection, testing, and maintenance; and operation) would cover the different types of equipment included in the scope of B30.

In 1982, the Committee was reorganized as an Accredited Organization Committee, operating under procedures developed by ASME and accredited by the American National Standards Institute.

This Standard presents a coordinated set of rules that may serve as a guide to government and other regulatory bodies and municipal authorities responsible for the guarding and inspection of the equipment falling within its scope. The suggestions leading to accident prevention are given both as mandatory and advisory provisions; compliance with both types may be required by employers of their employees.

In case of practical difficulties, new developments, or unnecessary hardship, the administrative or regulatory authority may grant variances from the literal requirements or permit the use of other devices or methods, but only when it is clearly evident that an equivalent degree of protection is thereby secured. To secure uniform application and interpretation of this Standard, administrative or regulatory authorities are urged to consult the B30 Committee, in accordance with the format described in Section III, before rendering decisions on disputed points.

This volume of the Standard, which was approved by the B30 Committee and by ASME, was approved by ANSI and designated as an American National Standard on January 30, 2003.

Safety codes and standards are intended to enhance public safety. Revisions result from committee consideration of factors such as technological advances, new data, and changing environmental and industry needs. Revisions do not imply that previous editions were inadequate.

# ASME B30 STANDARDS COMMITTEE

## Safety Standards for Cableways, Cranes, Derricks, Hoists, Hooks, Jacks, and Slings

(The following is the roster of the Committee at the time of approval of this Standard.)

### STANDARDS COMMITTEE OFFICERS

**P. S. Zorich**, *Chair*  
**B. D. Closson**, *Vice Chair*  
**J. D. Wendler**, *Secretary*

### STANDARDS COMMITTEE PERSONNEL

<b>N. E. Andrew</b> , Sverdrup Technology, Inc.	<b>H. G. Leidich</b> , Ingersoll-Rand
<b>W. T. Hargrove</b> , <i>Alternate</i> , Mantech International Corp.	<b>J. T. Perkins</b> , <i>Alternate</i> , Ingersoll-Rand
<b>R. E. Bluff</b> , Mingus Constructors, Inc.	<b>C. Lucas</b> , The Crosby Group
<b>R. J. Bolen</b> , E. I. DuPont	<b>P. A. Boeckman</b> , <i>Alternate</i> , The Crosby Group
<b>A. D. Brown</b> , Kenney Construction Co.	<b>L. D. Means</b> , Wire Rope Technical Board/Wire Rope Corp. of America, Inc.
<b>P. L. Rossi</b> , <i>Alternate</i> , U.S. Department of Labor, OSHA	<b>D. M. Sleightholm</b> , <i>Alternate</i> , Bridon America Corp.
<b>S. C. Buck</b> , International Union of Operating Engineers	<b>K. J. Miller</b> , Jacobs Engineering
<b>L. D. Demark</b> , <i>Alternate</i> , International Union of Operating Engineers	<b>D. W. Smith</b> , <i>Alternate</i> , Chicago Bridge and Iron Co.
<b>T. A. Christensen</b> , Alliance of American Insurers/Liberty Mutual Insurance	<b>J. E. Richardson</b> , U.S. Department of the Navy
<b>M. W. Mills</b> , <i>Alternate</i> , Liberty Mutual Group	<b>W. P. Rollins</b> , Manitowac Cranes
<b>B. D. Closson</b> , NACB Technical Services, Inc.	<b>C. L. Huneycutt</b> , <i>Alternate</i> , Associated General Contractors of America/J. A. Jones Construction
<b>T. L. Blanton</b> , <i>Alternate</i> , NACB Group, Inc.	<b>J. W. Rowland III</b> , Association of Iron and Steel Engineers/Bethlehem Steel Corp.
<b>J. P. Colletti</b> , John P. Colletti & Associates, Inc.	<b>E. E. Rudy</b> , U.S. Department of the Army
<b>R. A. Dahlin</b> , Walker Magnetic Group	<b>J. C. Ryan</b> , Boh Bros. Construction Co.
<b>J. W. Downs, Jr.</b> , <i>Alternate</i> , Downs Crane and Hoist Co.	<b>H. E. Livermore</b> , <i>Alternate</i> , Association of Construction Equipment Managers/Bechtel Leasing Service, Inc.
<b>D. W. Eckstine</b> , Grove Worldwide	<b>D. Sayenga</b> , Associated Wire Rope Fabricators
<b>R. H. Fowler</b> , U.S. Department of the Air Force	<b>D. J. Bishop</b> , <i>Alternate</i> , Bishop Lifting Products, Inc.
<b>J. L. Franks</b> , Consultant	<b>G. W. Shields</b> , Caterpillar, Inc.
<b>R. C. Slater</b> , <i>Alternate</i> , McKay International Engineering	<b>W. J. Smith</b> , U.S. Department of Labor, OSHA
<b>J. L. Gordon</b> , FKI Industries, Inc.	<b>A. R. Toth</b> , Morris Material Handling
<b>R. R. Reisinger</b> , <i>Alternate</i> , FKI Industries, Inc.	<b>S. J. McCormick</b> , <i>Alternate</i> , Morris Material Handling
<b>N. C. Hargreaves</b> , Power Crane & Shovel Association/Terex Corp.	<b>B. E. Weir, Jr.</b> , National Erectors Association/Norris Brothers Co., Inc.
<b>D. G. Quinn</b> , <i>Alternate</i> , Linkbelt Construction Equipment	<b>S. Conant</b> , <i>Alternate</i> , Conant Crane Rental Co.
<b>J. J. Headley</b> , Crane Institute of America	<b>J. D. Wendler</b> , The American Society of Mechanical Engineers
<b>R. M. Parnell</b> , <i>Alternate</i> , Industrial Training International	<b>R. C. Wild</b> , U.S. Army Corps of Engineers
<b>C. W. Ireland</b> , Amclyde Engineered Products	<b>S. G. Testerman</b> , <i>Alternate</i> , U.S. Army Corps of Engineers
<b>A. Egging</b> , <i>Alternate</i> , Amclyde Engineered Products	<b>D. N. Wolff</b> , National Crane Corp.
<b>L. S. Johnson</b> , American Equipment Co.	<b>P. S. Zorich</b> , RZP International Ltd.
<b>G. L. Owens</b> , <i>Alternate</i> , Granite Construction, Inc.	
<b>R. M. Kohner</b> , Landmark Engineering Service	
<b>H. I. Shapiro</b> , <i>Alternate</i> , Specialized Carriers and Rigging Association/Howard I. Shapiro & Associates	

### HONORARY MEMBERS

**J. M. Klibert**, Lift-All Co., Inc.  
**T. S. McKosky**, Consultant  
**R. W. Parry**, Consultant

## **B30.25 SUBCOMMITTEE PERSONNEL**

**G. W. Shields**, *Chair*, Caterpillar, Inc.  
**T. A. Christensen**, Liberty Mutual Insurance  
**R. A. Dahlin**, Walker Magnetic Group  
**C. L. Huneycutt**, J. A. Jones Construction  
**M. Mattia**, Institute of Scrap Recycling Industries

**L. R. Miller**, LBX Co.  
**W. C. Mitchell III**, Young Corp.  
**J. Soderlind**, *Alternate*, Young Corp.  
**M. W. Osborne**, E-Crane International

# SAFETY STANDARD FOR CABLEWAYS, CRANES, DERRICKS, HOISTS, HOOKS, JACKS, AND SLINGS

## B30 SERIES INTRODUCTION

### GENERAL

This Standard is one of a series of safety standards on various subjects that have been formulated under the general auspices of the American National Standards Institute. One purpose of the Standard is to serve as a guide to governmental authorities having jurisdiction over subjects within the scope of the Standard. It is expected, however, that the Standard will find a major application in industry, serving as a guide to manufacturers, purchasers, and users of the equipment.

For the convenience of the user, the Standard has been divided into separate volumes.

- B30.1 Jacks
- B30.2 Overhead and Gantry Cranes (Top Running Bridge, Single or Multiple Girder, Top Running Trolley Hoist)
- B30.3 Construction Tower Cranes
- B30.4 Portal, Tower, and Pillar Cranes
- B30.5 Mobile and Locomotive Cranes
- B30.6 Derricks
- B30.7 Base Mounted Drum Hoists
- B30.8 Floating Cranes and Floating Derricks
- B30.9 Slings
- B30.10 Hooks
- B30.11 Monorails and Underhung Cranes
- B30.12 Handling Loads Suspended From Rotorcraft
- B30.13 Storage/Retrieval (S/R) Machines and Associated Equipment
- B30.14 Side Boom Tractors
- B30.15 Mobile Hydraulic Cranes  
Note: B30.15-1973 has been withdrawn. The revision of B30.15 is included in the latest edition of B30.5.
- B30.16 Overhead Hoists (Underhung)
- B30.17 Overhead and Gantry Cranes (Top Running Bridge, Single Girder, Underhung Hoist)
- B30.18 Stacker Cranes (Top or Under Running Bridge, Multiple Girder With Top or Under Running Trolley Hoist)
- B30.19 Cableways
- B30.20 Below-the-Hook Lifting Devices
- B30.21 Manually Lever Operated Hoists
- B30.22 Articulating Boom Cranes
- B30.23 Personnel Lifting Systems

- B30.24 Container Cranes<sup>1</sup>
- B30.25 Scrap and Material Handlers
- B30.26 Rigging Hardware<sup>1</sup>
- B30.27 Material Placement Systems<sup>1</sup>
- B30.28 Balance-Lifting Units<sup>1</sup>

If these standards are adopted for governmental use, the references to other national codes and standards in the specific volumes may be changed to refer to the corresponding regulations of the governmental authorities.

The use of cableways, cranes, derricks, hoists, hooks, jacks, and slings is subject to certain hazards that cannot be met by mechanical means but only by the exercise of intelligence, care, and common sense. It is therefore essential to have personnel involved in the use and operation of equipment who are competent, careful, physically and mentally qualified, and trained in the safe operation of the equipment and the handling of the loads. Serious hazards are overloading, dropping or slipping of the load caused by improper hitching or slinging, obstructing the free passage of the load, and using equipment for a purpose for which it was not intended or designed.

The Standards Committee fully realizes the importance of proper design factors, minimum or maximum sizes, and other limiting dimensions of wire rope or chain and their fastenings, sheaves, sprockets, drums, and similar equipment covered by the Standard, all of which are closely connected with safety. Sizes, strengths, and similar criteria depend on many different factors, often varying with the installation and uses. These factors depend on the condition of the equipment or material; the loads; the acceleration or speed of the ropes, chains, sheaves, sprockets, or drums; the type of attachments; the number, size, and arrangement of sheaves or other parts; environmental conditions causing corrosion or wear; and many variables that must be considered in each individual case. The rules given in the Standard must be interpreted accordingly, and judgment must be used in determining their application.

The Standards Committee will be glad to receive criticisms of this Standard's requirements and suggestions

<sup>1</sup> B30.24, B30.26, B30.27, and B30.28 are in the developmental stage.

for its improvement, especially those based on actual experience in application of the rules.

Suggestions for changes to the Standard should be submitted to the Secretary of the B30 Committee, ASME, Three Park Avenue, New York, NY 10016-5990, and should be in accordance with the following format:

(a) Cite the specific paragraph designation of the pertinent volume.

(b) Indicate the suggested change (addition, deletion, revision, etc.).

(c) Briefly state the reason and/or evidence for the suggested change.

(d) Submit suggested changes to more than one paragraph in the order that the paragraphs appear in the volume.

The B30 Committee will consider each suggested change in a timely manner in accordance with its procedures.

## SECTION I: SCOPE

This Standard applies to the construction, installation, operation, inspection, and maintenance of jacks; power-operated cranes, monorails, and crane runways; power-operated and manually operated derricks and hoists; lifting devices, hooks, and slings; and cableways.

This Standard does not apply to track and automotive jacks, railway or automobile wrecking cranes, shipboard cranes, shipboard cargo-handling equipment, well-drilling derricks, skip hoists, mine hoists, truck body hoists, car or barge pullers, conveyors, excavating equipment, or equipment falling within the scope of the following Committees: A10, A17, A90, A92, A120, B20, B56, and B77.

## SECTION II: PURPOSE

This Standard is designed to

(a) guard against and minimize injury to workers, and otherwise provide for the protection of life, limb, and property by prescribing safety requirements

(b) provide direction to owners, employers, supervisors, and others concerned with, or responsible for, its application

(c) guide governments and other regulatory bodies in the development, promulgation, and enforcement of appropriate safety directives

## SECTION III: INTERPRETATIONS

Upon request, the B30 Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B30 Committee, ASME, Three Park Avenue, New York, NY 10016-5990.

The request for interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his request utilizing the following format.

**Subject:** Cite the applicable paragraph number(s) and provide a concise description.

**Edition:** Cite the applicable edition of the pertinent volume for which the interpretation is being requested.

**Question:** Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain any proprietary names or information.

Requests that are not in this format will be rewritten in this format by the Committee prior to being answered, which could change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

## SECTION IV: NEW AND EXISTING INSTALLATIONS

(a) *Effective Date.* The effective date of this volume for the purpose of defining new and existing installations shall be 1 year after its date of issuance.

(b) *New Installations.* Construction, installation, inspection, testing, maintenance, and operation of equipment manufactured and facilities constructed after the effective date of this volume shall conform to the mandatory requirements of this volume.

(c) *Existing Installations.* Inspection, testing, maintenance, and operation of equipment manufactured and facilities constructed prior to the effective date of this volume shall be done, as applicable, in accordance with the requirements of this volume.

It is not the intent of this volume to require retrofitting of existing equipment. However, when an item is being modified, its performance requirement shall be reviewed relative to the current volume. If the performance differs substantially, the need to meet the current requirement shall be evaluated by a qualified person selected by the owner (user). Recommended changes shall be made by the owner (user) within 1 year.

## **SECTION V: MANDATORY AND ADVISORY RULES**

Mandatory rules of this volume are characterized by use of the word *shall*. If a provision is of an advisory nature, it is indicated by use of the word *should* and is a recommendation to be considered, the advisability of which depends on the facts in each situation.

## **SECTION VI: METRIC CONVERSIONS**

The values stated in U.S. Customary units are to be regarded as the standard.

# ASME B30.25-2003

## SUMMARY OF CHANGES

Following approval by the ASME B30 Committee and ASME, and after public review, ASME B30.25-2003 was approved by the American National Standards Institute on January 30, 2003.

ASME B30.25-2003 includes editorial changes, revisions, and corrections introduced in ASME B30.25a-2001, as well as the following changes identified by a margin note, (03).

<i>Page</i>	<i>Location</i>	<i>Change</i>
1	Section 25-0.1	Revised
2, 4	25-0.2.2	(1) Definition of <i>brake</i> revised in its entirety (2) Definition of <i>safety sign</i> added
6-9	Section 25-0.3	Revised
10	Section 25-1.1	Revised
	25-1.2.1	First paragraph and subpara. (f) revised
11	25-1.4.2(c)	Revised
12	25-1.5.1(c)(1)	Revised
13	25-1.6.1(i)	Revised
15	25-1.7.3(b)	Revised
	25-1.7.4(c)	Revised
18	25-2.1.2	Revised
20	25-2.3.2(d)	Revised
21	25-3.2.3(a)(3)	Revised
22	25-3.2.4	Revised

### SPECIAL NOTE:

The interpretations to ASME B30.25 are included in this edition as a separate section for the user's convenience.

# SCRAP AND MATERIAL HANDLERS

## Chapter 25-0 Scope, Definitions, and References

### (03) SECTION 25-0.1: SCOPE OF B30.25

Volume B30.25 includes provisions that apply to the construction, installation, operation, inspection, and maintenance of scrap handlers consisting of a base, a revolving upper structure with operator's station(s), and a front for lifting scrap or materials using attachments such as magnets and grapples, and any variations thereof in which the equipment retains the same fundamental characteristics. The provisions included in this volume apply to scrap handlers that are crawler mounted, rail mounted, wheel mounted, or on pedestal bases. The scope includes only handlers used to lift, lower, and swing scrap and material at various radii, which are powered by internal combustion engines or electric motors, and which are operated hydraulically.

Hydraulic excavators designed for digging and trenching, forestry machines, machines designed for demolition, lattice and telescopic boom cranes, rail-mounted cranes for railway and automobile wreck clearance, and equipment covered by other volumes of this Standard are excluded.

### SECTION 25-0.2: DEFINITIONS

#### 25-0.2.1 Types of Scrap and Material Handlers

A scrap and material handler is herein after referred to as a "handler." Handlers may be mounted on one of the following bases:

*crawler handler*: mounted on a base, equipped with crawler tracks for travel (see Fig. 1).

*pedestal-mounted handler*: mounted on a pedestal base (see Fig. 2).

*rail-mounted handler*: mounted on a base, equipped for travel on a railroad track (see Fig. 3).

*wheel-mounted handler (multiple control stations)*: mounted on a base, equipped with axles and rubber-tired wheels for travel, a power source(s), and having separate control stations for driving and operating (see Fig. 4).

*wheel-mounted handler (single control station)*: mounted on a base, equipped with axles and rubber-tired wheels for

travel, a power source, and having a single control station for driving and operating (see Fig. 5).

#### 25-0.2.2 General

*accessory*: a secondary part or assembly of parts that contributes to the overall function and usefulness of a machine.

*administrative or regulatory authority*: a governmental agency, or the employer in the absence of governmental jurisdiction.

*ancillary equipment*: equipment not required for the basic operation of the handler.

*appointed*: assigned specific responsibilities by the employer or the employer's representative.

*arm cylinder(s)*: the hydraulic cylinder(s) that moves the arm in relation to the boom.

*arm (stick)*: the second section of a front, one end of which is attached to the boom.

*assembler/modifier*: entity that assembles and/or modifies basic components to produce a handler.

*attachment*: an accessory like a magnet or grapple that is affixed to the second or third member of a front.


*authorized*: appointed by a duly constituted administrative or regulatory authority.

*axis of rotation*: the vertical axis around which the handler upper-structure rotates.

*axle*: the shaft or spindle with which or about which a wheel rotates. On wheel-mounted handlers it refers to a type of axle assembly including housings, gearing, differential, bearings, and mounting appurtenances.

*axle (bogie)*: two or more axles mounted in tandem in a frame so as to divide the load between the axles and permit vertical oscillation of the wheels.

*backward stability*: the handler's ability to resist overturning in the direction opposite the front while in the unloaded condition.

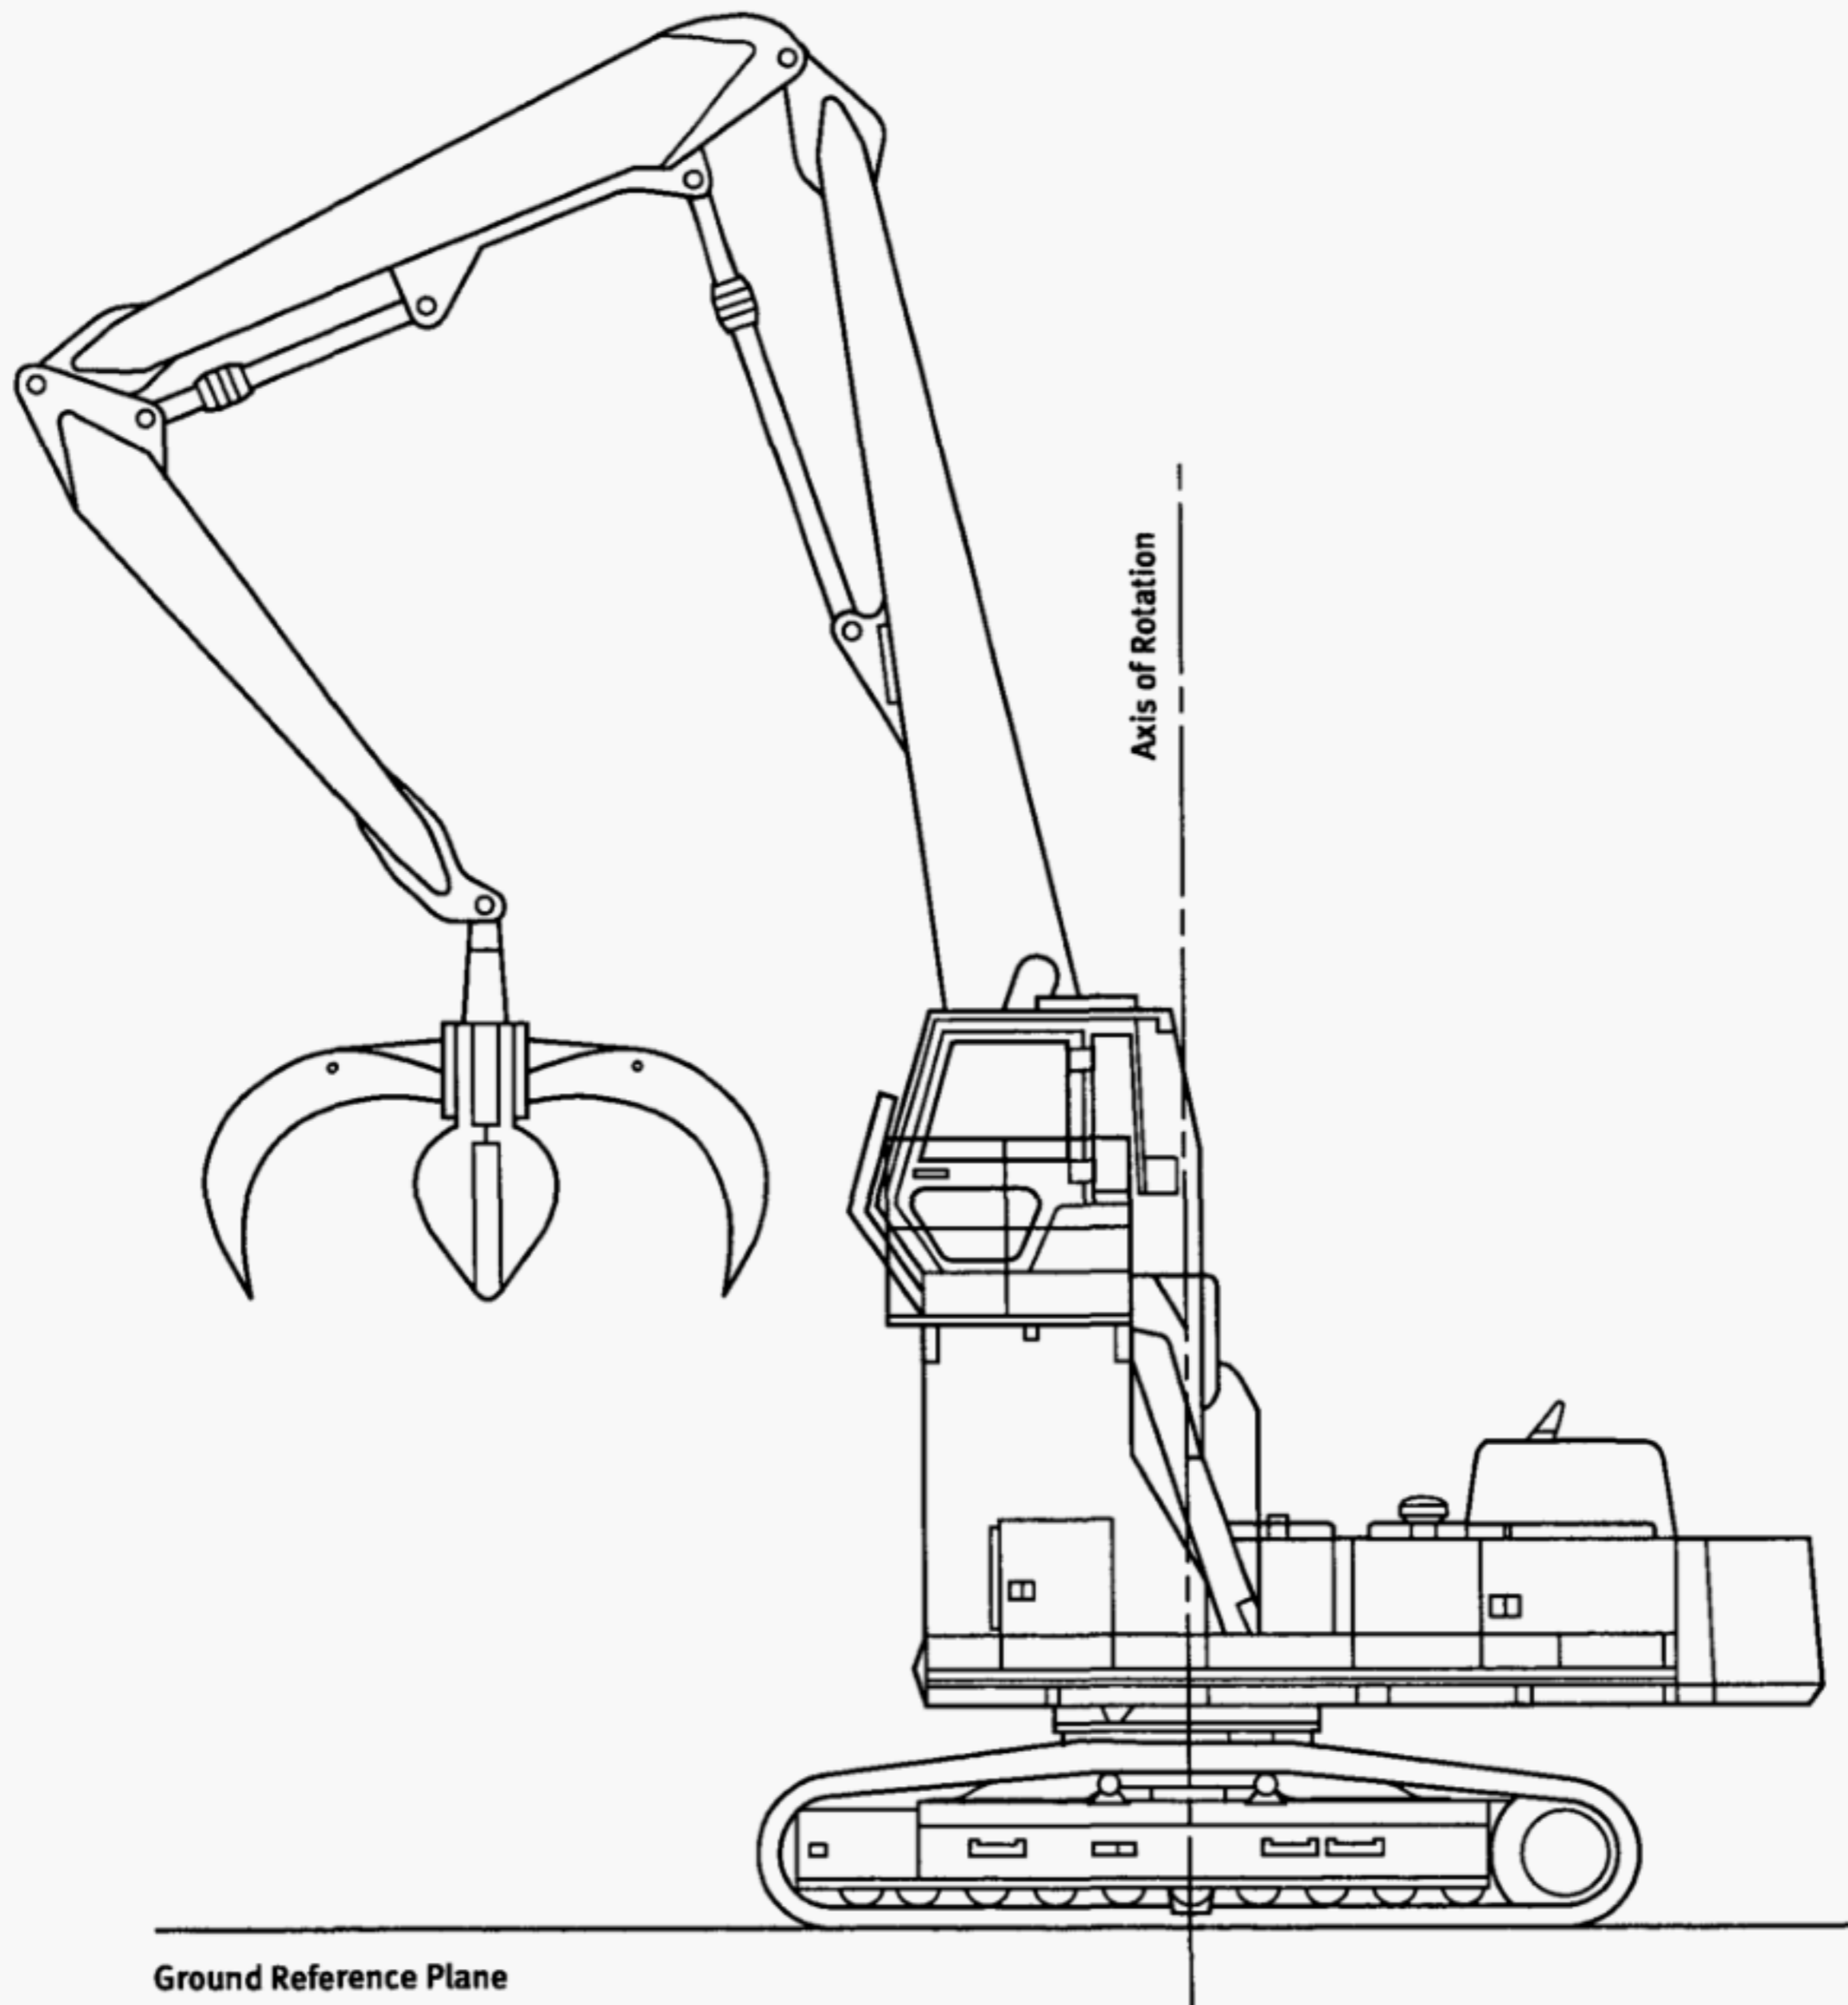

**Fig. 1 Crawler-Mounted Handler**

**ballast:** weight used to supplement the weight of the handler in providing stability for handling loads (the term “ballast” is normally associated with rail-mounted handlers).

**base (mounting):** the structure on which the rotating upper-structure handler is mounted.

**boom:** first section of a front, one end of which is attached to the upper-structure.

**boom cylinder(s):** the hydraulic cylinder(s) that move(s) the boom vertically in relation to the upper-structure.

**(03) brake:** a device used for retarding or stopping motion.


**brake, parking:** a system to prevent inadvertent movement of a stationary handler.

**brake, secondary:** a system for stopping the handler upon service brake system failure.

**brake, service:** a system for slowing and stopping the handler during travel operation.

**cab:** a weatherproof housing that covers the operator’s station.

**counterweight:** weight used to supplement the weight of the handler in providing stability for handling loads.

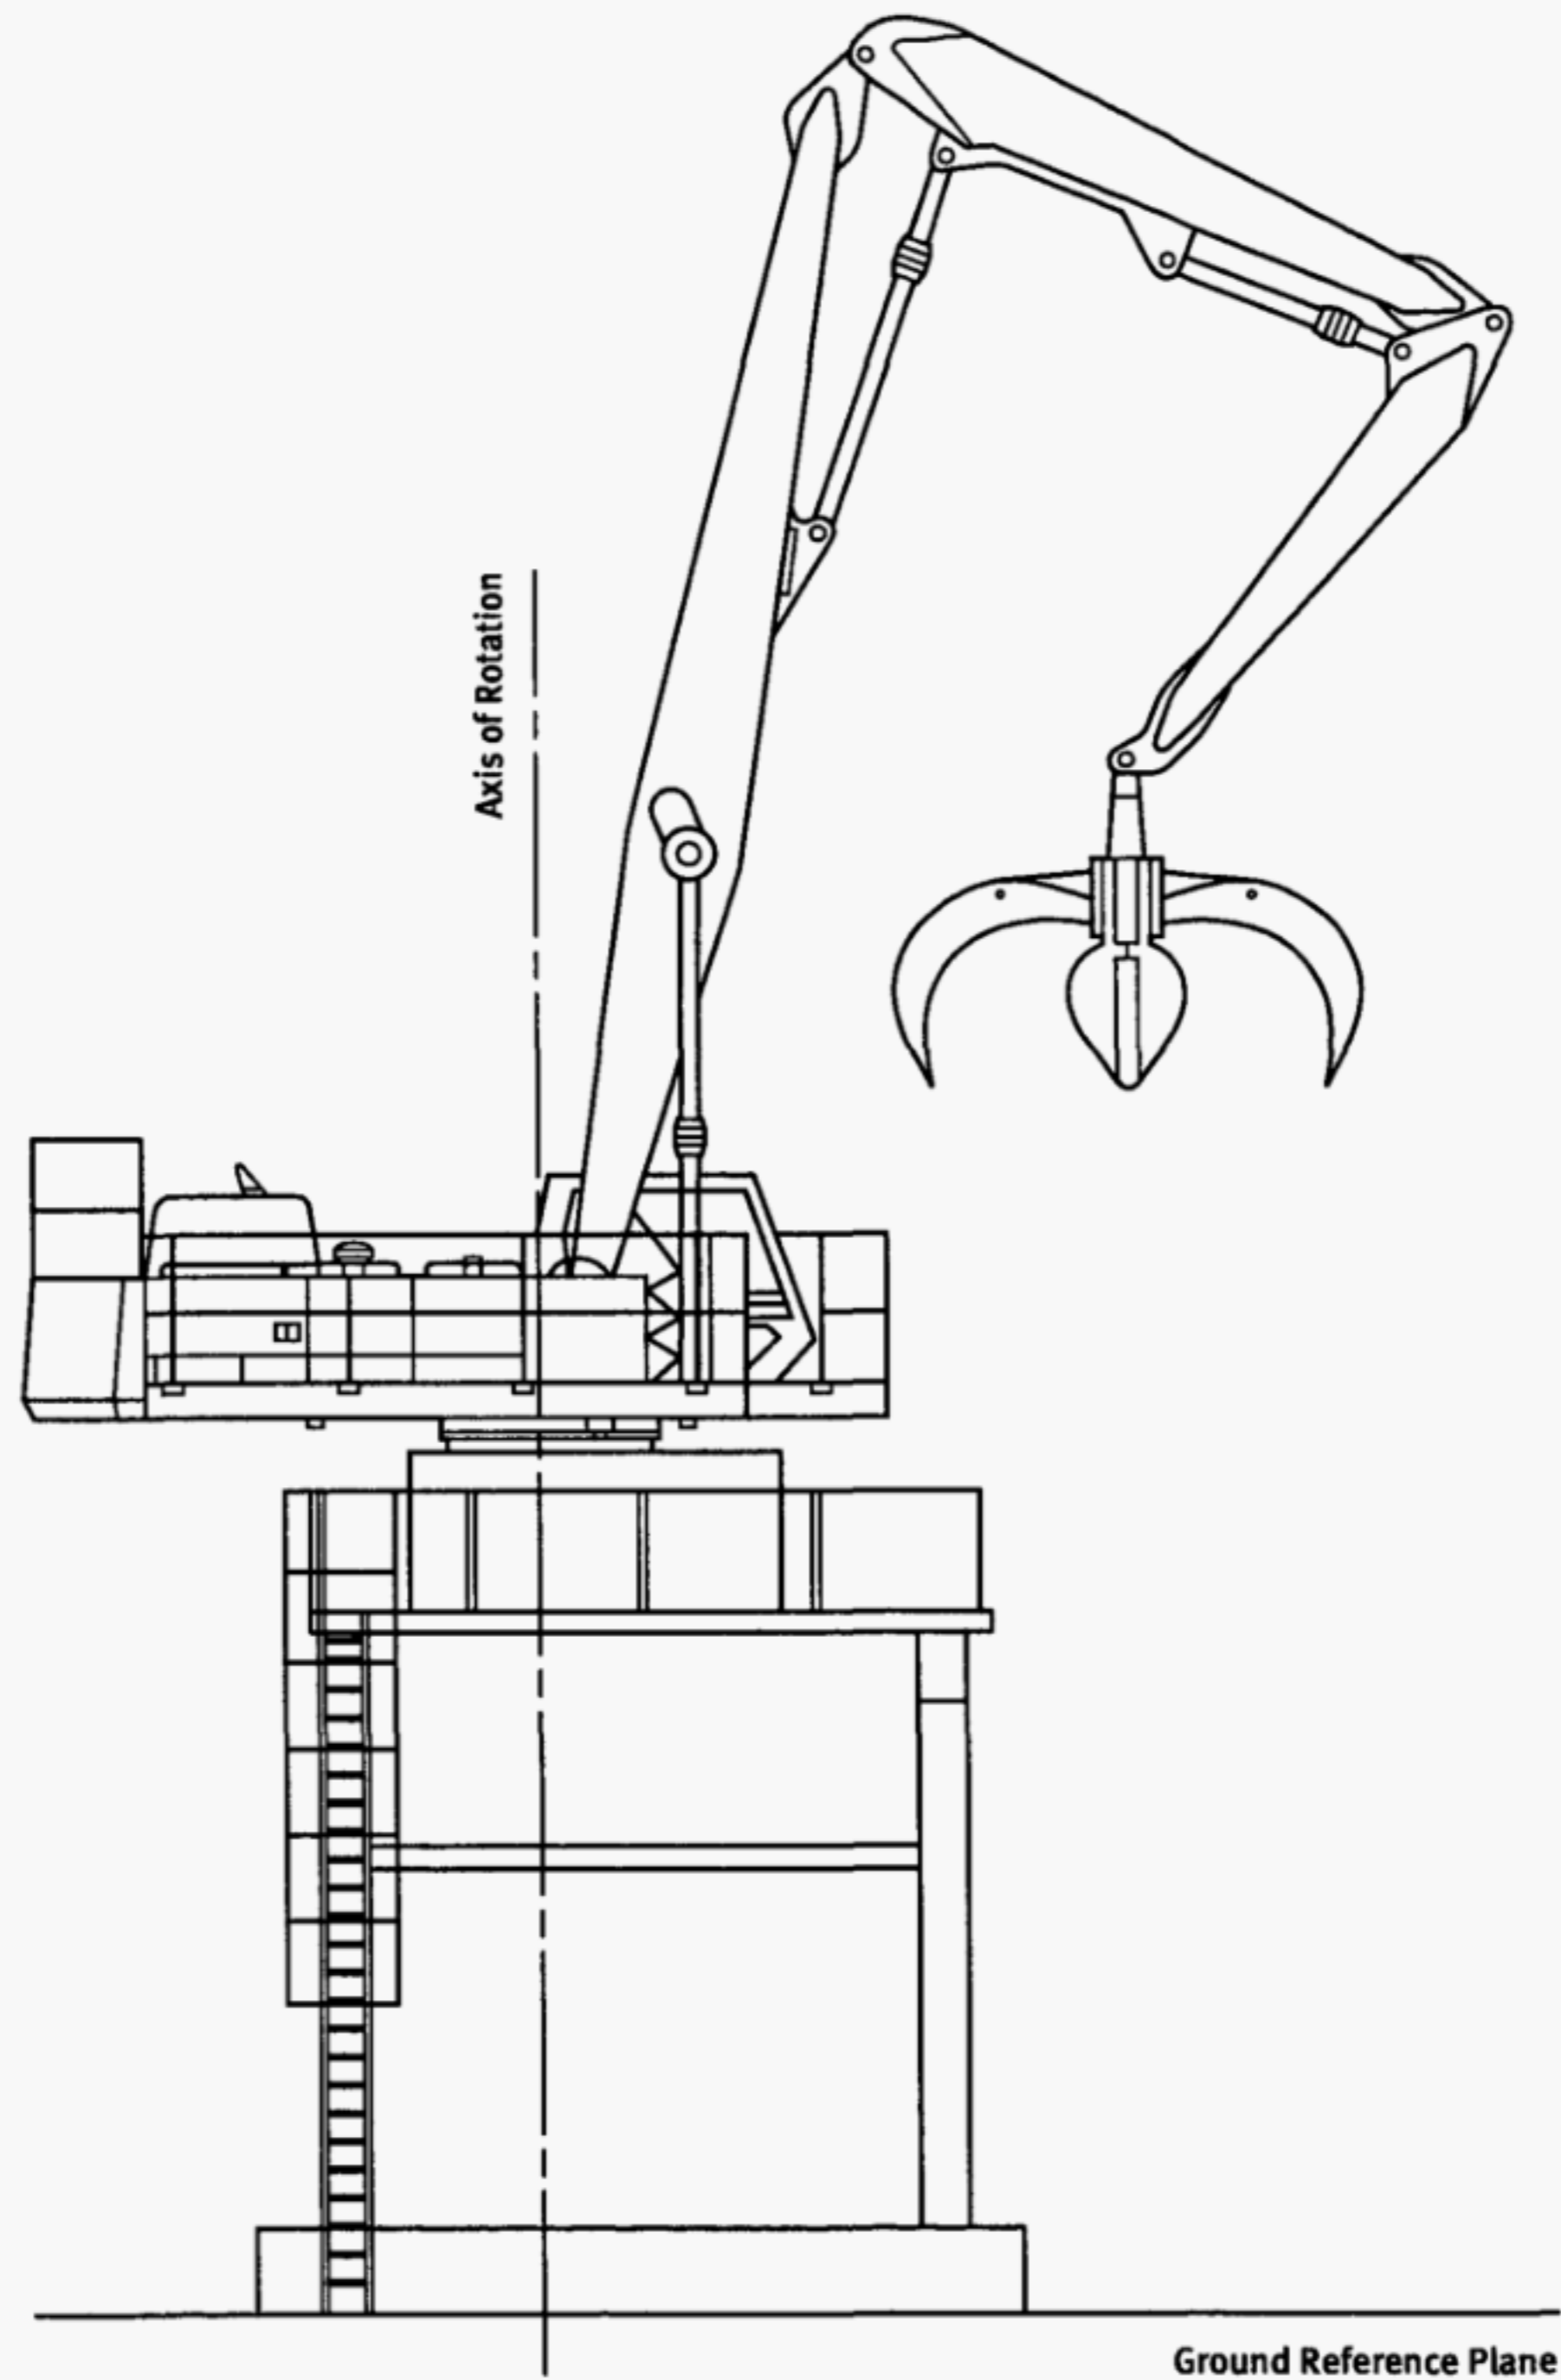

**Fig. 2 Pedestal-Mounted Handler**

*daily:* a work shift consisting of a period of 10 hr or less usage within a 24-hr period.

*designated person:* a person selected or assigned by the employer or the employer's representative as being competent to perform specific duties.


*front:* consists of two or three structural members actuated by hydraulic cylinders that are affixed to the upper-structure for mounting the attachment (see Figs. 6 and 7).

*jib:* third section of a front, one end of which is attached to the arm.

*jib cylinder(s):* the hydraulic cylinder(s) that move(s) the jib in relation to the arm.

*lift capacity:* ratings in pounds (kilograms) established by the manufacturer or assembler/modifier.

*manufacturer:* the entity that designs, fabricates, and assembles basic components.

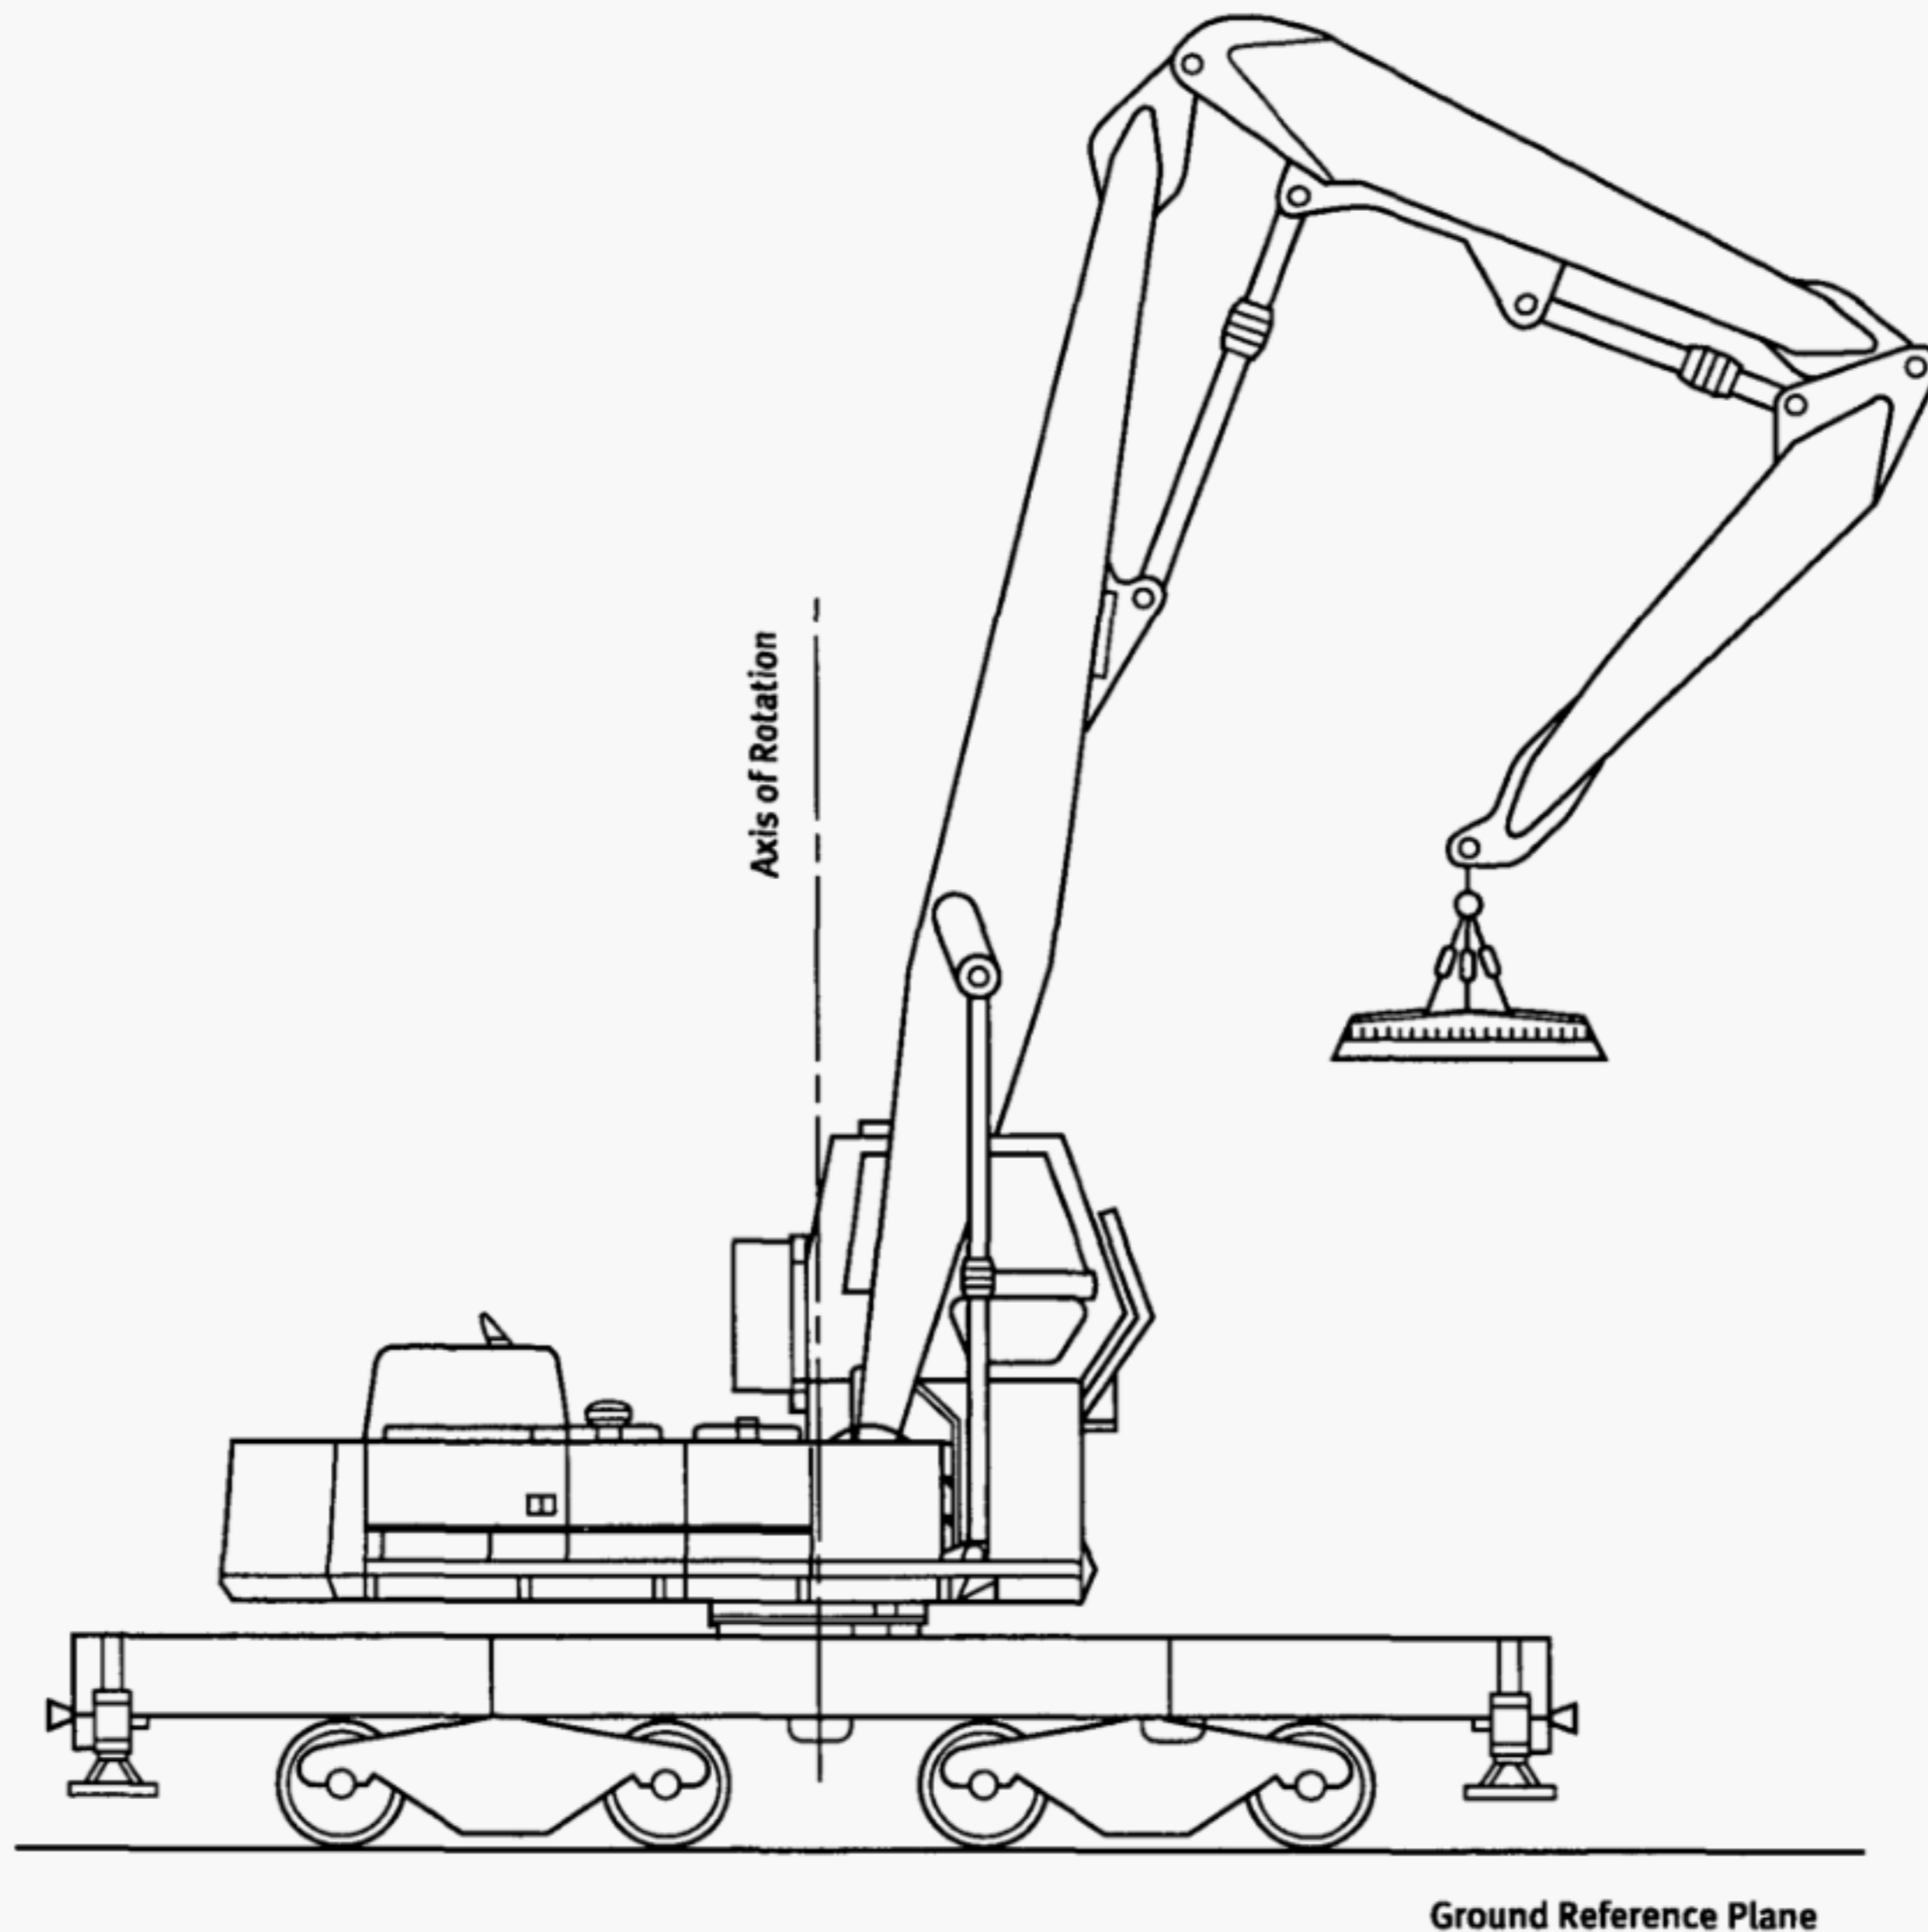

**Fig. 3 Rail-Mounted Handler**

**material:** waste products processed for incineration and/or disposal.

**monthly:** a period of 200 hr or less usage within a 30-day period.

**outriggers:** extendable or fixed members attached to the mounting base that are used to raise, level, and support the handler.

**qualified operator:** an operator who has met the requirements of this volume and has been appointed as an operator.


**qualified person:** a person who, by possession of a recognized degree in an applicable field, or certificate of professional standing, or who, by extensive knowledge, training, and experience, has successfully demonstrated the ability to solve or resolve problems relating to the subject matter and work.

**rail clamp:** a tong-like metal device mounted on a locomotive car, which can be connected to the track to prevent movement along the rail.

**safety sign:** a visual alerting device in the form of a decal, label, placard, or other marking that advises the operator or others of the nature and the degree of the potential hazard(s). It can also describe safety precautions or evasive actions to take, or provide other directions to eliminate or reduce the hazard. (ANSI Z535.4-1998) (03)

**scrap:** metals, paper, plastic, glass, rubber, or textiles that are diverted, collected, sorted, shredded, sheared, baled, chipped, separated, sized, or otherwise processed for use in making new products.

**side loading:** a nonvertical load applied to the vertical plane of the front.

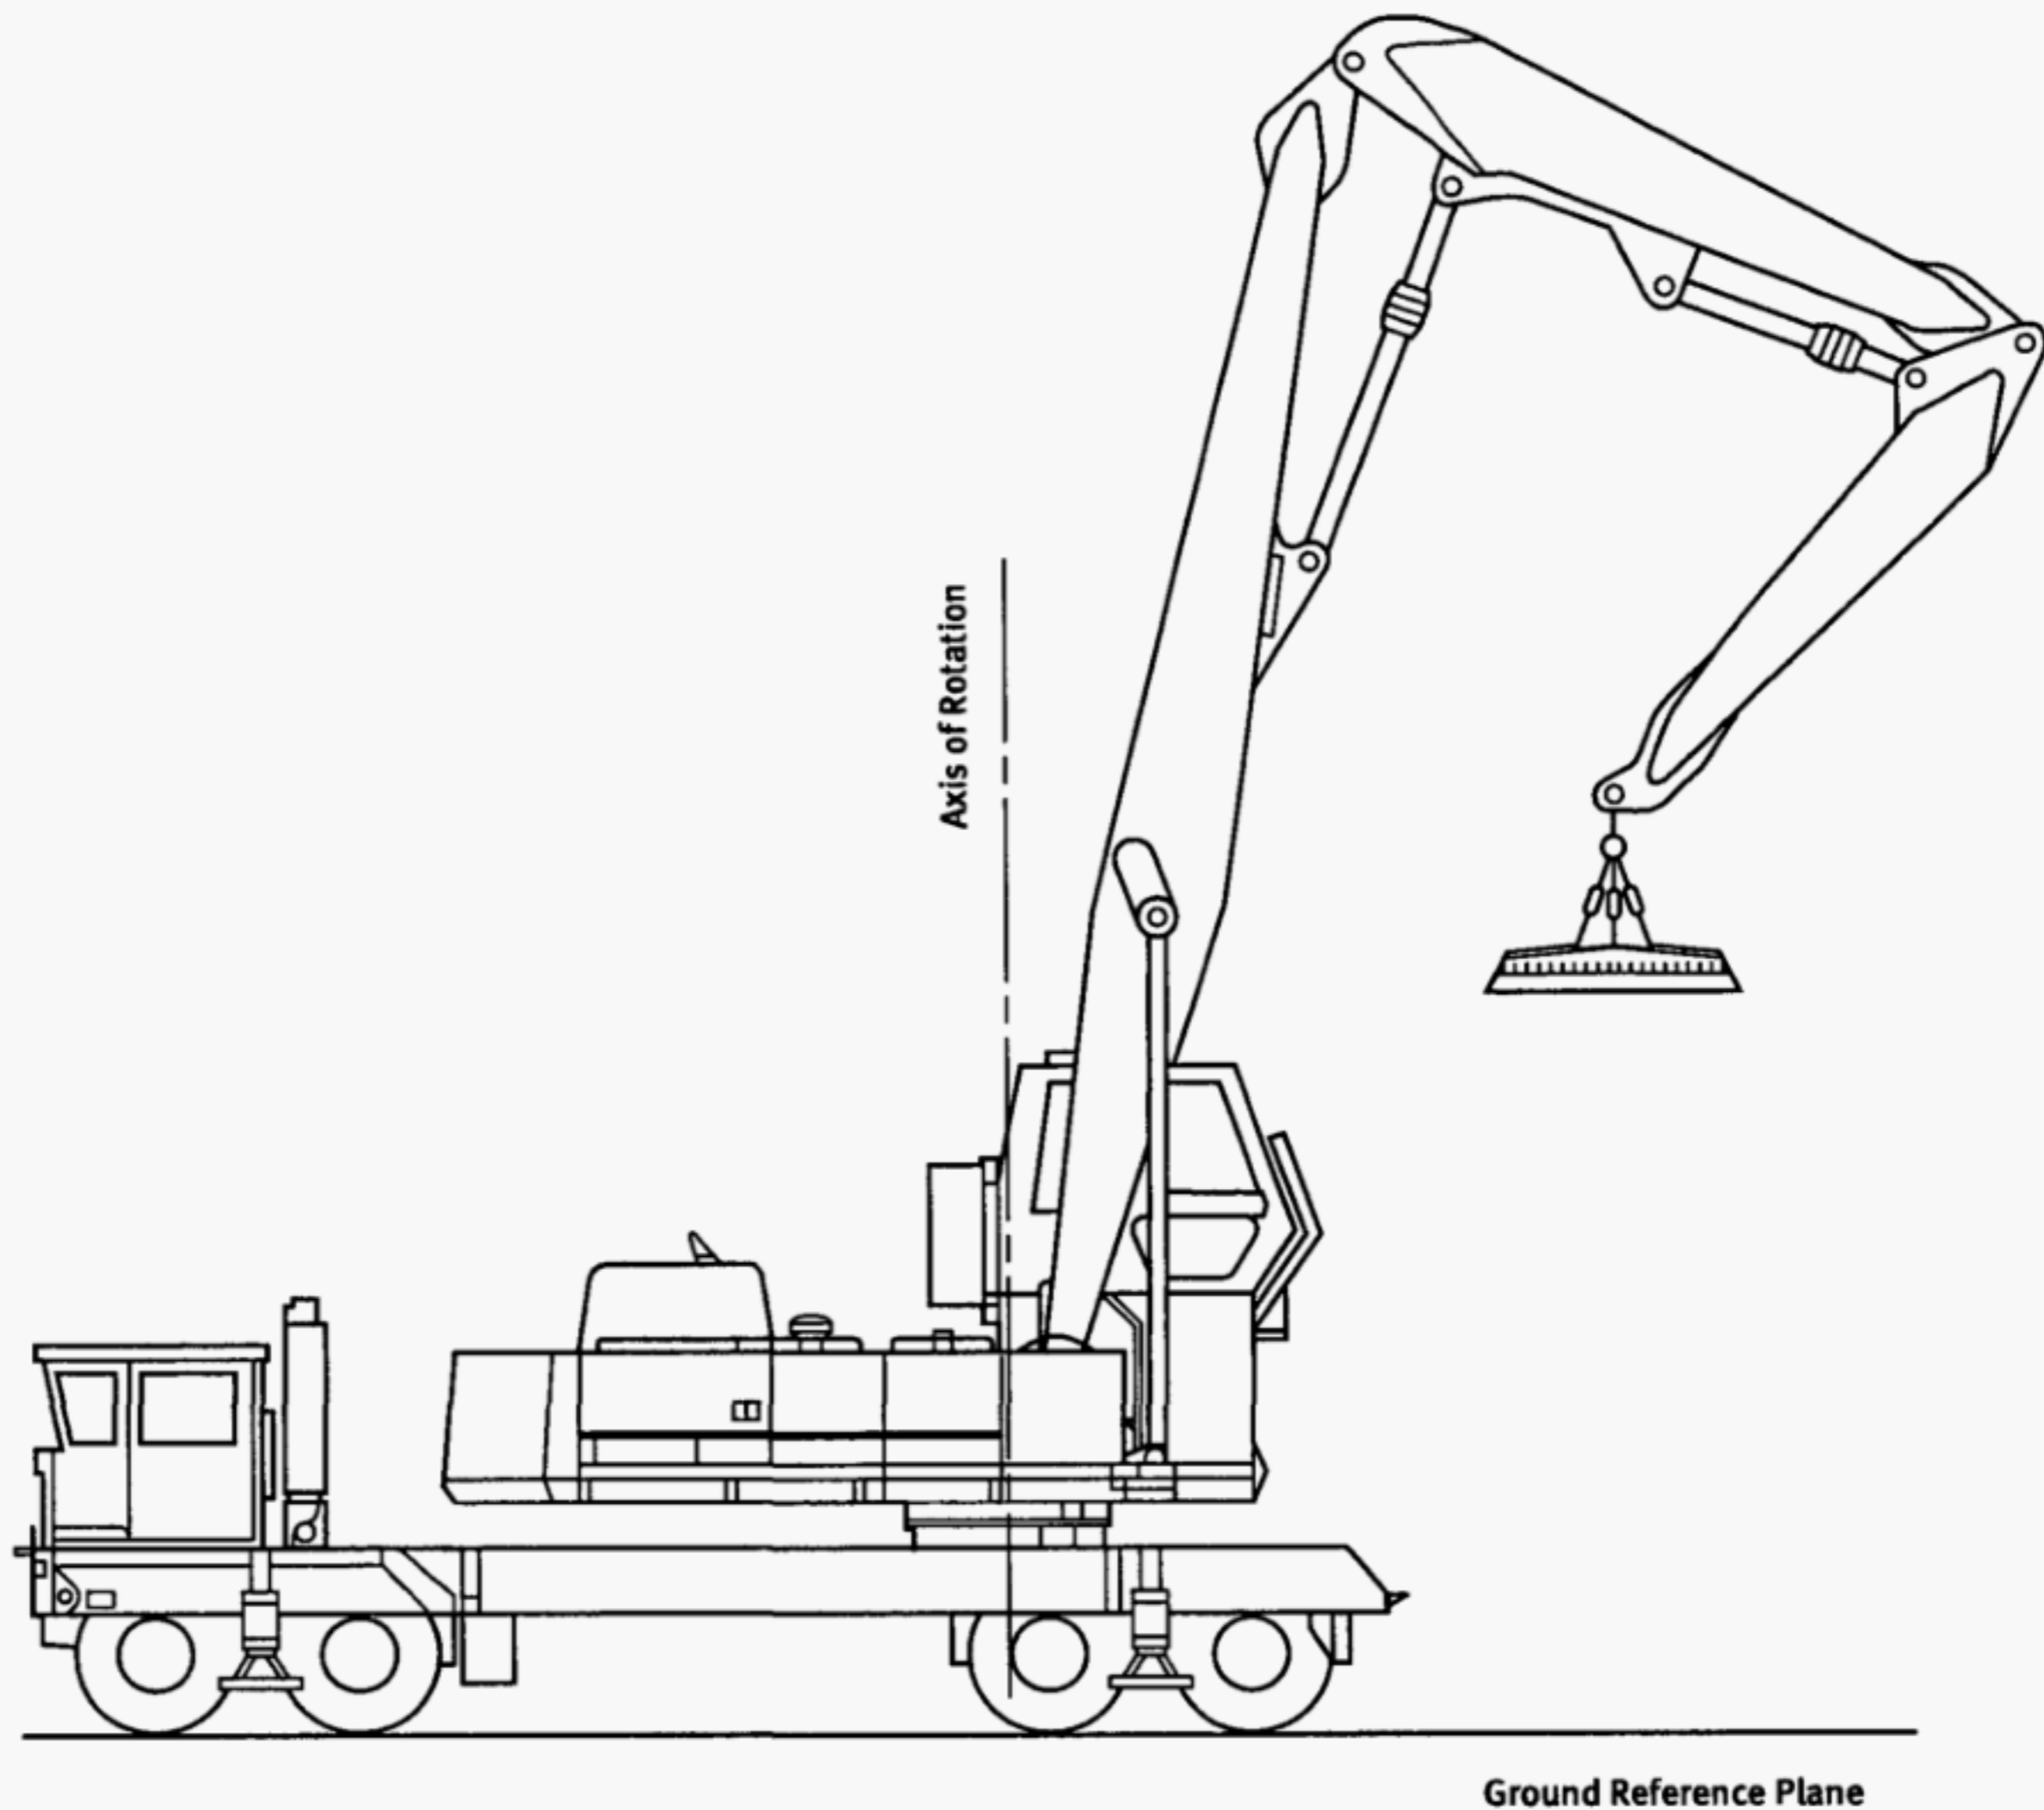

**Fig. 4 Wheel-Mounted Handler  
(Multiple Control Stations)**

*stabilizer*: extendable members attached to the mounting base to increase the stability of the rail-mounted handler, but that may not have the capability of relieving all of the weight from the tracks.

*structural competence*: the ability of the handler and its components to withstand the stresses imposed by the applied loads.

*swing*: rotation of the upper structure for movement of loads in a horizontal direction about the axis of rotation.

*swing lock*: a positive mechanism that prevents rotation of the upper structure.

*swing mechanism*: the machinery involved in providing rotation of the upper-structure.

*three points of support*: features of an access system that permits a person to use two hands and one foot, or

two feet and one hand while ascending, descending, or moving about on the handler.

*travel*: the movement of the handler under its own power from one location to another.


*upper-structure*: the rotating frame structure of the handler and the operating machinery mounted thereon.

*wheel base*: the distance between centers of front and rear axles. For a multiple-axle assembly, the axle center for wheel base measurement is taken as the midpoint of the assembly.

## SECTION 25-0.3: REFERENCES

(03)

The following is a list of standards and specifications referenced in this Standard, showing the year of approval.

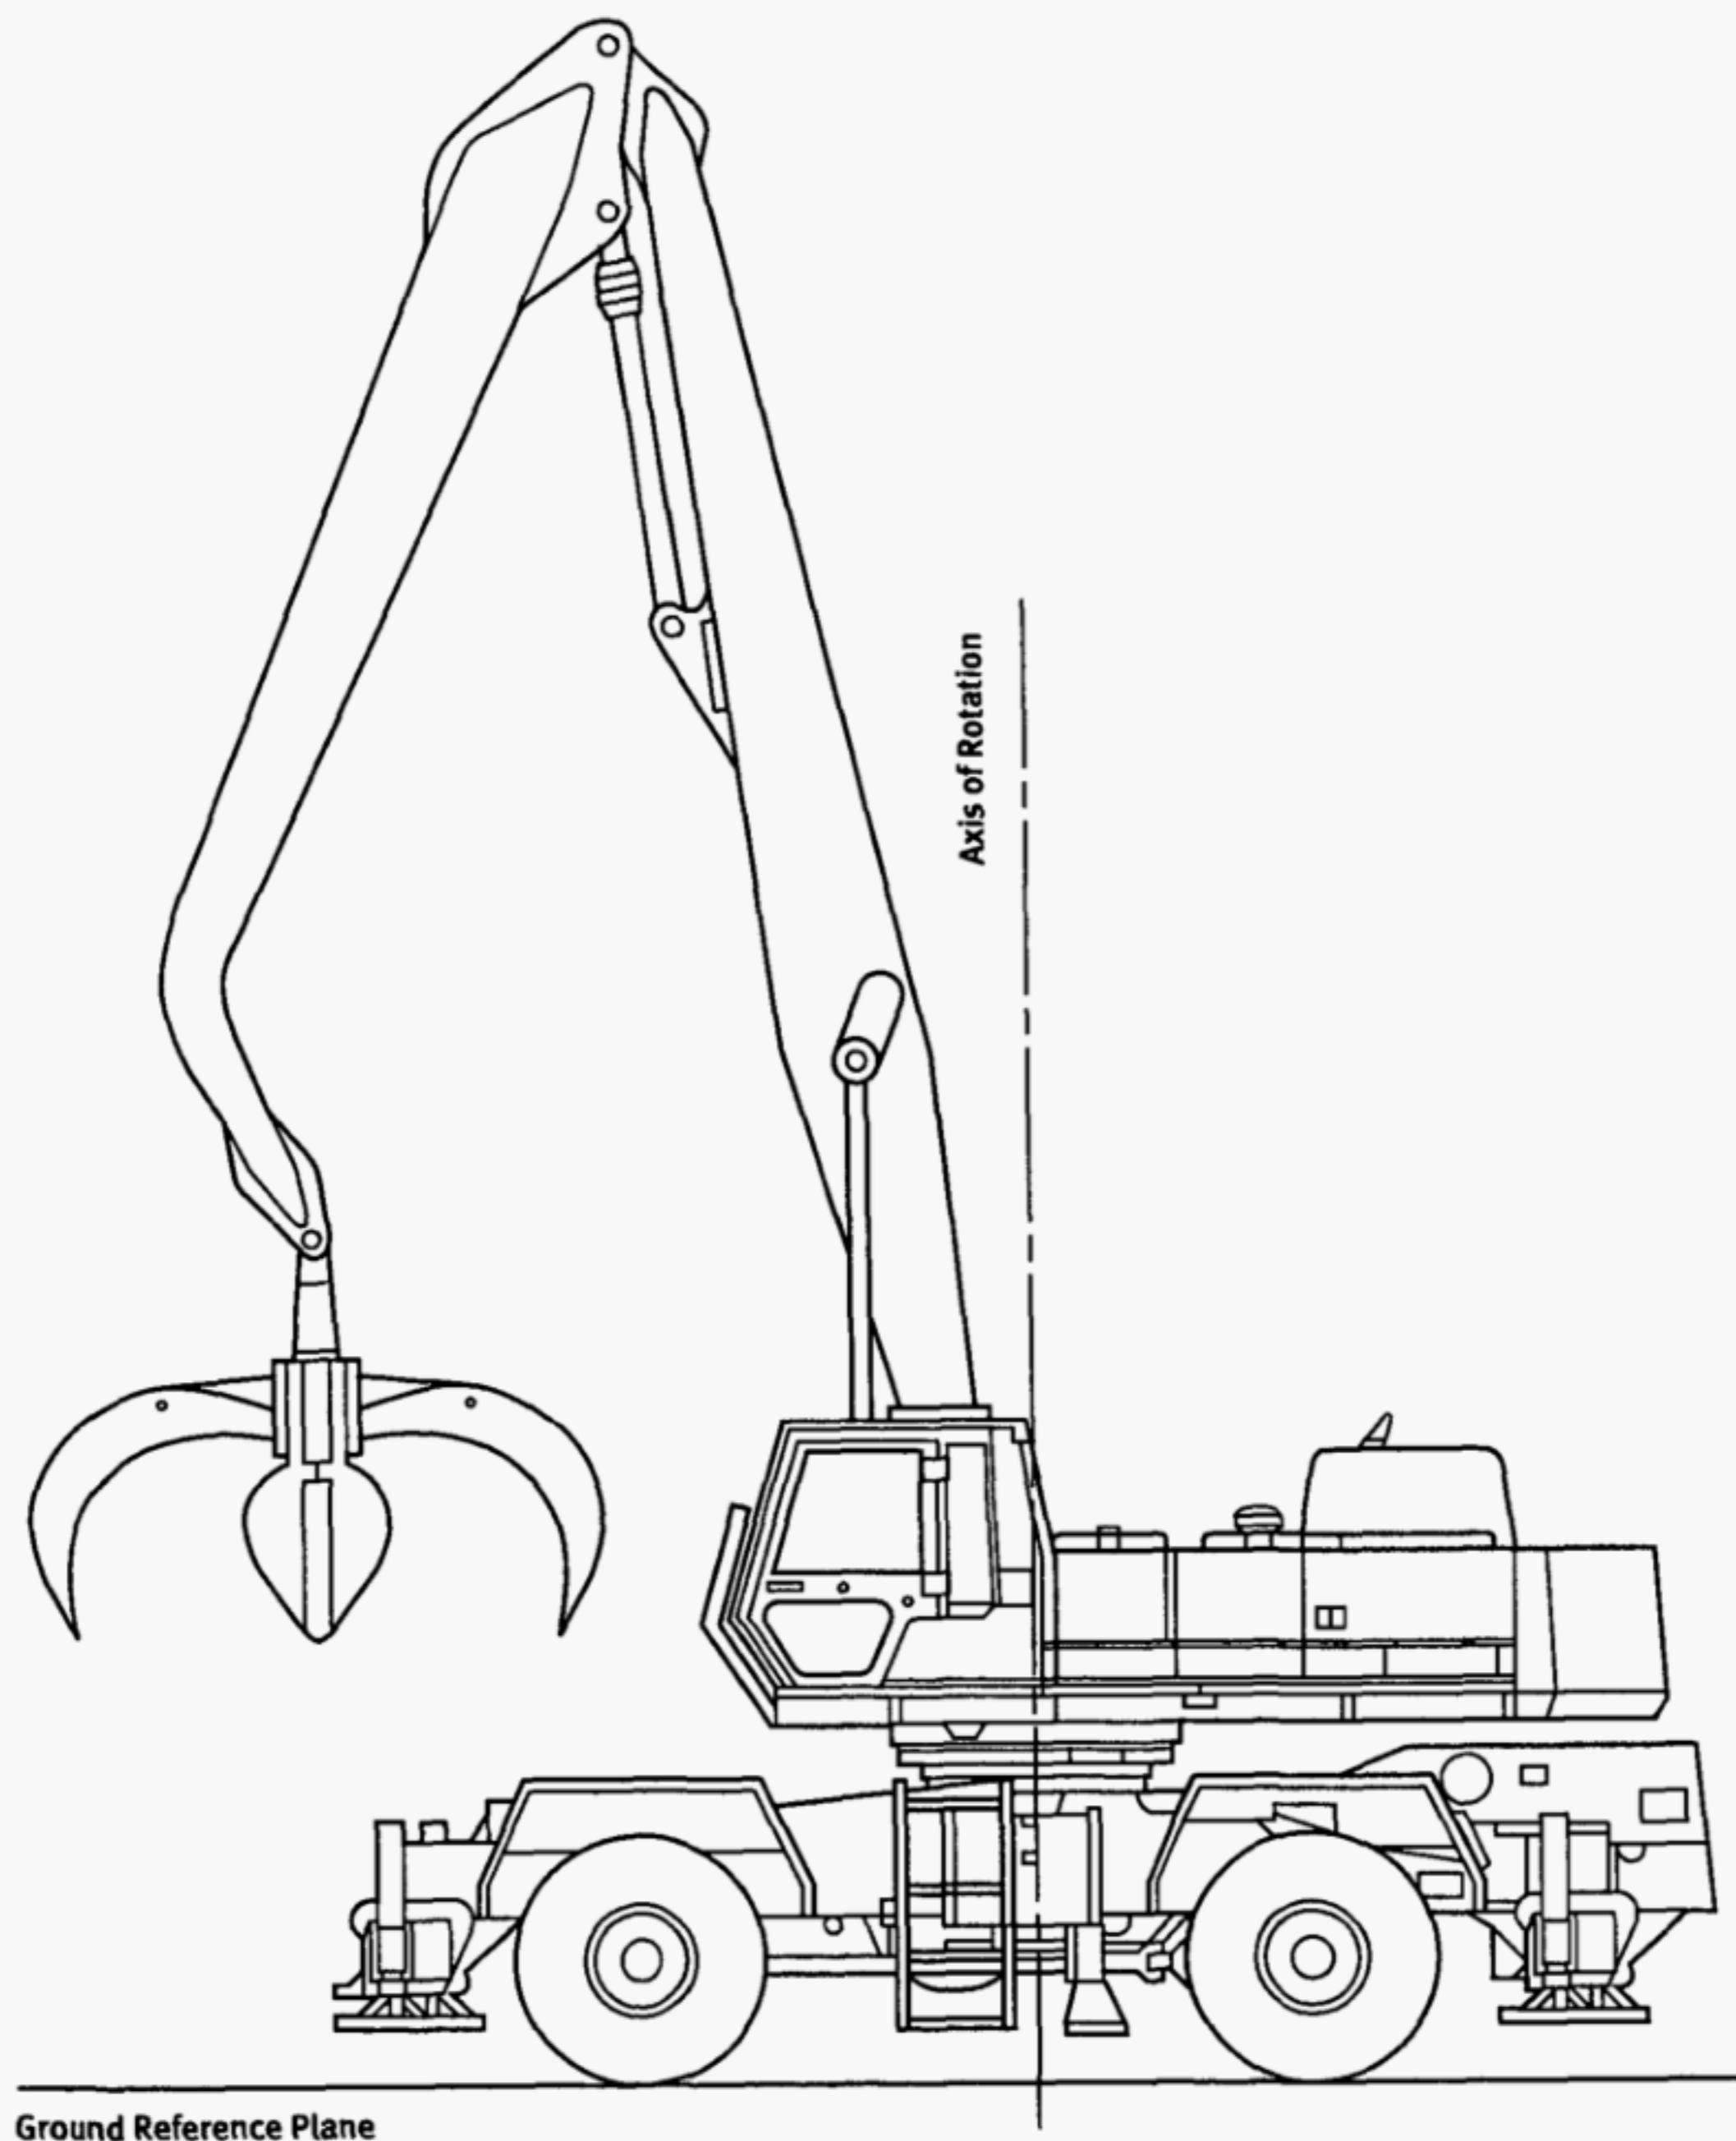

**Fig. 5 Wheel-Mounted Handler  
(Single Control Station)**

ANSI/AWS D14.3-82, Specification for Welding Earth-moving and Construction Equipment<sup>1</sup>

Publisher: American Welding Society (AWS), 550 NW Le Jeune Road, Miami, FL 33126

ANSI/NFPA 70-1996, National Electrical Code

<sup>1</sup> Copies may also be obtained from the American National Standards Institute, Inc., 25 West 43rd Street, New York, NY 10036.


ANSI Z26.1-1990, Safety Code for Glazing Materials for Glazing Motor Vehicles Operating on Land Highways

ANSI Z535.4-1998, Product Safety Signs and Labels

Publisher: American National Standards Institute (ANSI), 25 West 43rd Street, New York, NY 10036

ASME B30.20-1998, Below-the-Hook Lifting Devices<sup>1</sup>

Publisher: The American Society of Mechanical Engineers (ASME International), Three Park Avenue, New

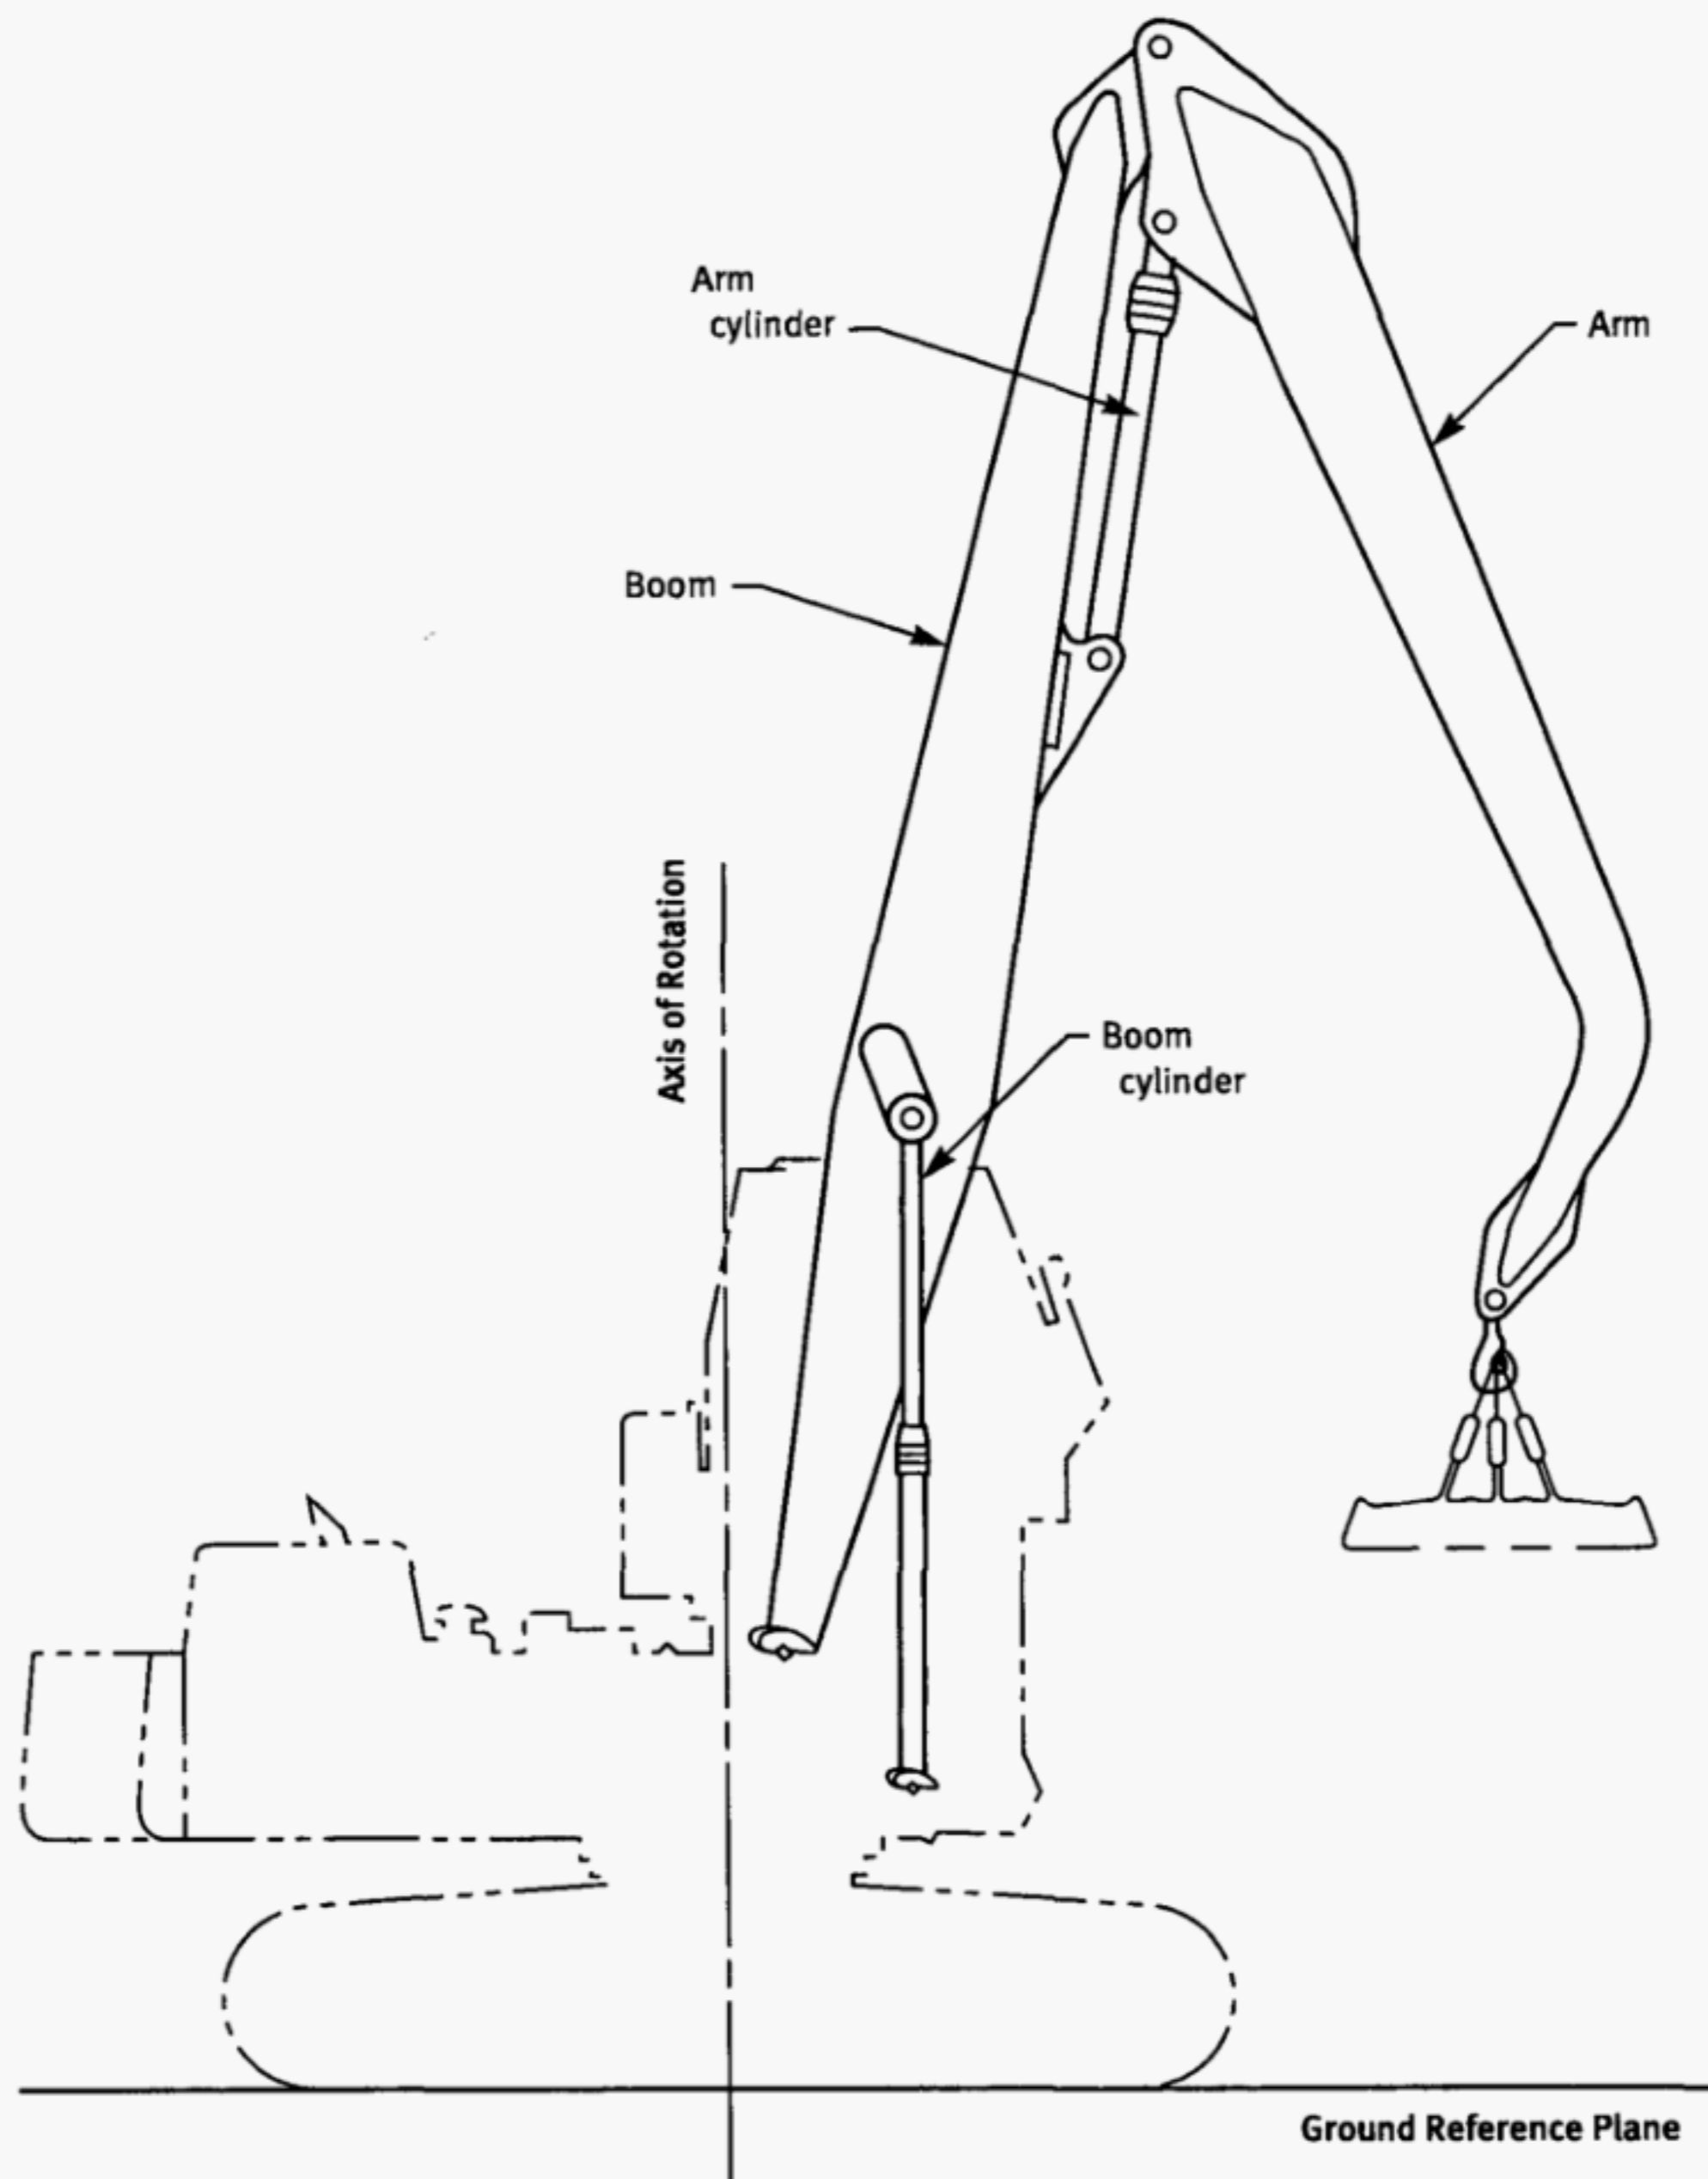

**Fig. 6 Two-Piece Front**

York, NY 10016-5990; Order Department: 22 Law Drive, Box 2300, Fairfield, NJ 07007-2300


ISO 10265, Earth Moving Machinery — Crawler Machines — Performance and Test Criteria for Brake Systems<sup>1</sup>

Publisher: International Organization for Standardization (ISO), 1 rue de Varembe, Case postale 56, CH-1211 Genève 20, Switzerland

ISO/SAE 3450-1998, Earth Moving Machinery-Braking Systems of Rubber-Tired Machines — Systems and

Performance Requirements and Test Procedures  
SAE J185-1988,<sup>2</sup> Access Systems for Off-Road Machines  
SAE J369-1994,<sup>2</sup> Flammability of Polymeric Interior Materials — Horizontal Test Method  
SAE J386-1997,<sup>2</sup> Operator Restraint System for Off-Road Work Machines

<sup>2</sup> References to individual SAE standards are stated as SAE JXXXX throughout this volume; these standards are contained in the various volumes of 2001 SAE Handbook.

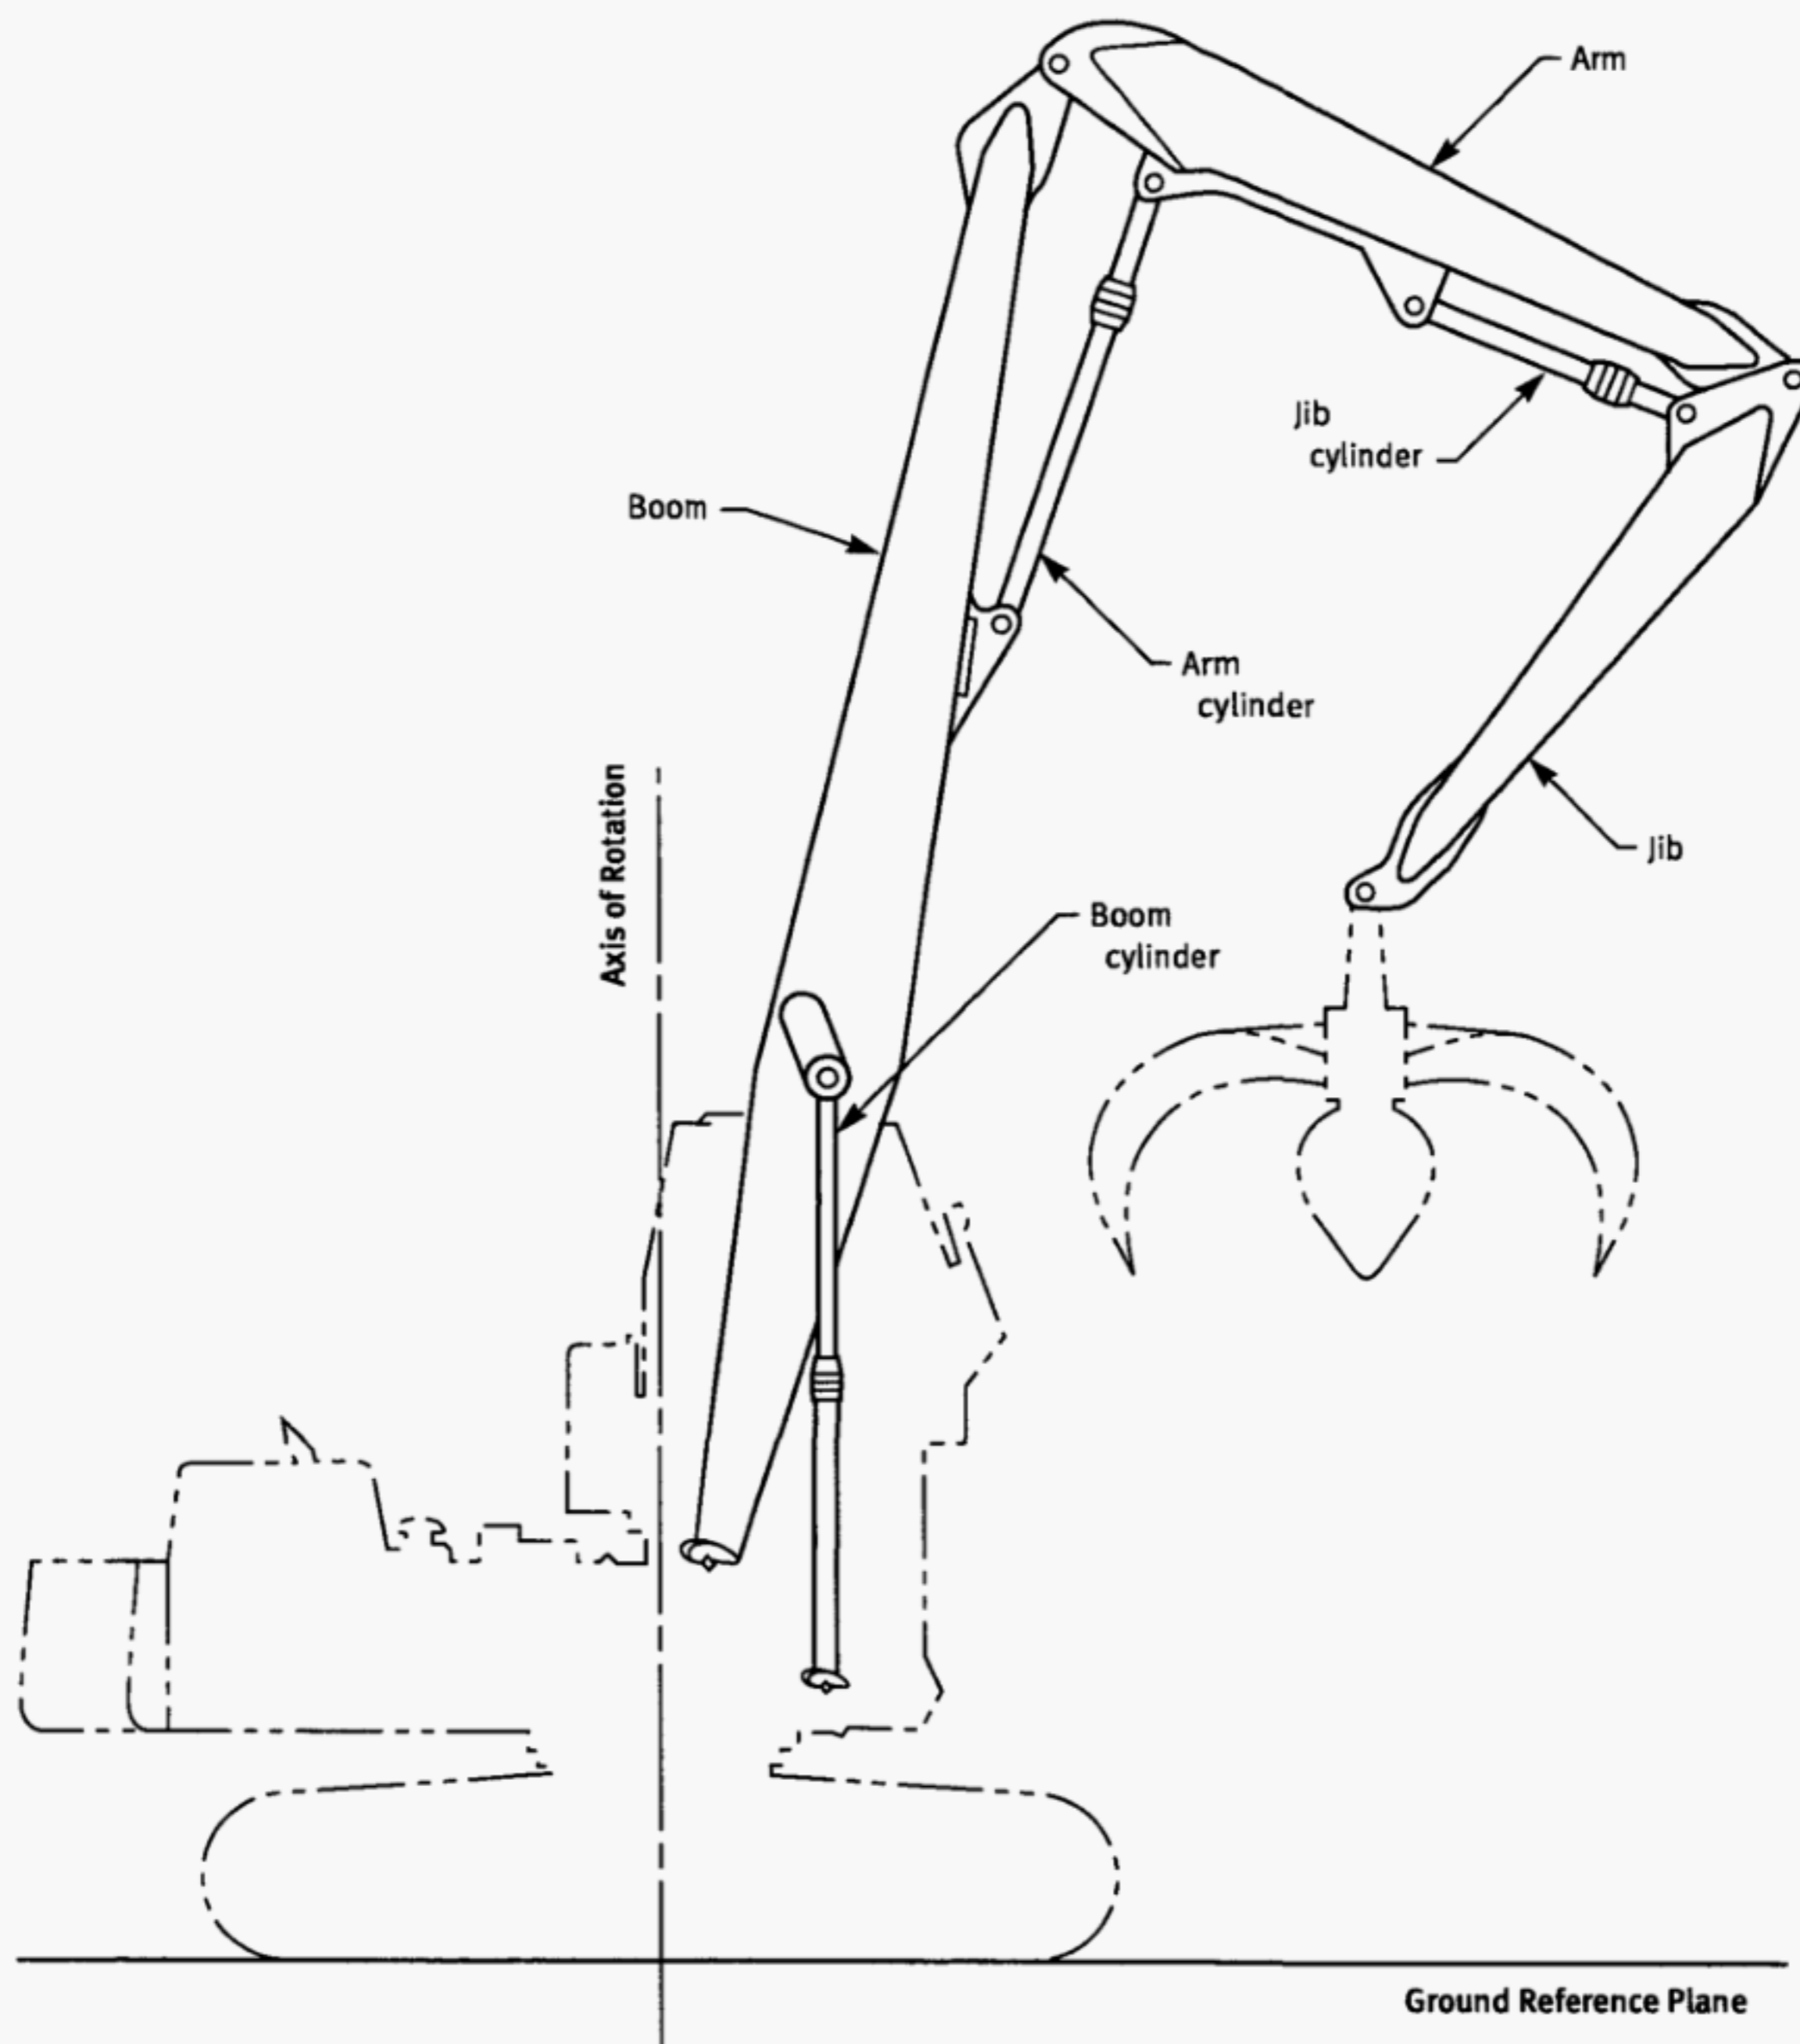

**Fig. 7 Three-Piece Front**

SAE J898-1994,<sup>2</sup> Control Locations for Off-Road Work Machines

SAE J925-1993,<sup>2</sup> Minimum Service Access Dimensions for Off-Road Machines

SAE J1309-1996,<sup>2</sup> Travel Performance and Rating Procedure, Crawler Mounted Hydraulic Excavators, Material Handlers, Knuckle Boom Log Loaders, and Certain Forestry Equipment

SAE J1356-1988,<sup>2</sup> Performance Criteria for Falling Object Guards for Excavators

SAE J1362-1997,<sup>2</sup> Graphical Symbols for Operator Controls and Displays on Off-Road Self-Propelled Work Machines

SAE J1446-1989,<sup>2</sup> On-Machine Alarm Test and Evaluation Procedure for Construction and General Purpose Industrial Machinery

- SAE J1814-1993,<sup>2</sup> Operator Controls — Off-Road Machines
- SAE J2393-1998,<sup>2</sup> Swing Performance and Rating Procedures — Material Handlers and Knuckle Boom Log Loaders
- SAE J2417-1998,<sup>2</sup> Lift Capacity Calculation Method Knuckle-Boom Log Loaders and Certain Forestry Equipment
- 2001 SAE Handbook, Volume 1, "Materials, Fuels, Emissions and Noise"
- 2001 SAE Handbook, Volume 2, "Parts and Components"
- 2001 SAE Handbook, Volume 3, "On-Highway Vehicles & Off-Highway Machinery"
- Publisher: Society of Automotive Engineers (SAE), 400 Commonwealth Drive, Warrendale, PA 15096
- United States Safety Appliance Standards and Power Brakes Requirements (January 1973), Revised September 1977, Federal Railroad Administration, D.O.T. Standards — U.S. Department of Transportation
- Publisher: Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402

## Chapter 25-1

### Construction and Characteristics

#### (03) SECTION 25-1.1: LIFT CAPACITY

##### 25-1.1.1 Lift Capacity — Calculation and Verification

Lift capacities for handlers shall be calculated and verified as prescribed in SAE J2417 and in accordance with the conditions and limitations given on the lift capacity chart. Lift capacities shall be determined with the handler as equipped and outfitted by the manufacturer or assembler/modifier with all auxiliary and ancillary equipment included as specified on the lift capacity chart.

##### 25-1.1.2 Lift Capacity Chart

A durable rating chart(s) with legible letters and figures shall be provided with each handler and attached in a location accessible to the operator while at the controls. The lift capacity charts shall conform to SAE J2417, but can be in U.S. Customary units (pounds and feet) with a minimum of 5 ft grid increments.

##### 25-1.1.3 Rated Lift Capacity

The rated lift capacities for handlers shall be defined as in SAE J2417 and shall be determined by taking a percentage of the theoretical lift capacity, both hydraulic and stability limited. The handler lift capacities shall not exceed the following percentages for handlers as defined below.

Type of Handler Mounting or Limiting Condition	Lift Capacity Rating, %
All hydraulic	87
Stability, over side, front, and rear	
Crawler handler	75
Wheel-mounted handler, with or without outriggers	75
Outriggers fully extended and fully supporting the weight of the handler and the load	75
Rail-mounted handler	
without stabilizers extended	85
with stabilizers fully extended	80

#### SECTION 25-1.2: BACKWARD STABILITY

##### (03) 25-1.2.1 Backward Stability

In those instances where it may be desired to remove the front for transportation or maintenance, certain minimum backward stability criteria have been established

as defined in the following paragraphs. Where backward stabilities exceed the minimum criteria, the manufacturer or assembler/modifier shall install safety signs in the operator's cab warning of the hazards involved in removing the front or placing it in an unstable position. The signs shall include the appropriate signal word according to ANSI Z535.4, and shall also be included in the operator's manual. The manufacturer or assembler/modifier shall also state whether the unsafe condition occurs when the upper is positioned over the side, front, or rear of the base.

The general conditions for determination of the backward stability margin, applicable to all handlers, are as follows:

- (a) handler to be equipped for operation with the recommended front
- (b) front positioned to impose a minimum forward overturning moment
- (c) handler to be unloaded and without grapple or magnet
- (d) outriggers or stabilizers (if provided) fully retracted and stored in their travel position
- (e) handler to be standing on a firm level supporting surface; rail-mounted handlers to be standing on a level track
- (f) operating weight and conditions as specified in SAE J2417
- (g) handler equipped with the specified counterweight

##### 25-1.2.2 Minimum Backward Stability Conditions With Front Installed

The following shall be the minimum acceptable backward stability conditions:

- (a) For crawler handlers, the horizontal distance from the center of gravity of the entire handler to the axis of rotation shall not exceed 70% of the horizontal distance from the axis of rotation to the backward tipping axis in the least stable direction.
- (b) For wheel- and rail-mounted handlers, with the longitudinal axis of the upper-structure perpendicular to the longitudinal axis of the base, the total load on all wheels on the side of the base under the front, shall not be less than 15% of the total weight of the handler.
- (c) For wheel- and rail-mounted handlers, with the longitudinal axis of the upper-structure in line with the longitudinal axis of the base, in either direction, the total load on all wheels under the lesser loaded end of the

base shall not be less than 15% of the total weight of the handler.

### 25-1.2.3 Minimum Backward Stability Conditions With Front Removed

With the conditions as stated in para. 25-1.2.1, but with the front removed, the following shall be the minimum acceptable backward stability conditions:

(a) For crawler handlers, the horizontal distance from the center of gravity of the entire handler, less the front, to the axis of rotation shall not exceed 90% of the horizontal distance from the axis of rotation to the backward tipping axis in the least stable position.

(b) For wheel- and rail-mounted handlers, with the longitudinal axis of the upper-structure less the front perpendicular to the longitudinal axis of the carrier, the total load on all wheels on the side of the base supporting the least load shall not be less than 5% of the total weight of the handler.

## SECTION 25-1.3: SWING MECHANISM

### 25-1.3.1 Swing Control

The swing mechanism shall start and stop with controlled acceleration and deceleration. The swing mechanism shall meet the requirements of SAE J2393 for minimum performance and rating procedures. Use of the swing brake or reversing the control lever to achieve this criteria is acceptable if it is a normal operating procedure recommended by the manufacturer.

### 25-1.3.2 Swing Braking Means and Locking Device

(a) All handlers shall have a swing brake capable of bringing the upper structure to a complete stop as specified in SAE J2393. The manufacturer and/or assembler/modifier shall verify the swing brake meets the specifications set forth in SAE J2393.

(b) Means shall be provided to prevent the rotation of the upper structure during transport. This can be accomplished by a swing lock or swing brake.

(c) If the handler is not equipped with a swing lock, the swing brake shall be applied automatically when the engine stops.

## SECTION 25-1.4: HANDLER TRAVEL

### 25-1.4.1 Travel Mechanism

(a) On rail-mounted handlers, when the travel mechanism must be temporarily deactivated in the normal course of the handler's use, provision shall be made to disengage the travel mechanism from the cab or outside the handler body.

(b) On crawler-mounted handlers, travel performance shall be calculated and specified according to SAE J1309. The travel and steering mechanism shall be designed so

that it is not possible for both tracks to freewheel without operator control.

(c) All handlers shall be equipped with a travel alarm meeting the requirements of SAE J1446.

(d) On wheel-mounted handlers, the travel and steering mechanism shall be designed to permit a controlled stop in the event of the loss of engine power.

### 25-1.4.2 Travel Brakes

(a) Rail-mounted handlers shall be equipped with brakes capable of bringing the handler to a stop while descending the maximum grade recommended for travel. In addition, means shall be provided to engage brakes manually. Such engagement means shall be capable of holding the handler stationary on the maximum grade recommended for travel, and shall remain engaged in the event of loss of power.

(b) Crawler-mounted handlers shall be equipped with a service brake system, a secondary brake system, and a parking brake system that meet the brake performance requirements specified in ISO 10265. The brake systems may use common components; however, in the event of a failure of any single component, the remaining brake system(s) shall provide handler stopping capability meeting the secondary brake system performance requirements specified. After being applied, the parking brake system shall not be dependent upon an exhaustible energy source.

(c) Wheel-mounted handlers shall be equipped with a service brake system, a secondary brake system, and a parking brake system and meet the brake performance requirements defined in ISO/SAE J3450. The brake systems may use common components; however, in the event of a failure of any single component other than a tire, the remaining brake system shall provide handler stopping capability meeting the secondary brake system performance requirements specified. After being applied, the parking brake system shall not be dependent upon an exhaustible energy source. (03)

(d) Prior to being placed in service, all new or modified handlers shall be tested by the manufacturer or assembler/modifier to verify that the brake systems meet the specifications in paras. 25-1.4.2(a), (b), and (c).

## SECTION 25-1.5: CONTROLS

### 25-1.5.1 General

This Section describes two lever-type operating controls for wheel-mounted, crawler-mounted, or rail-mounted handlers on independent tracks.

(a) Primary controls are those that affect the handler's basic functions and are used by the handler operator while at the operator station.

(b) Controls for all front primary functions and all handler travel controls (except steering wheel, travel direction, and clutch control) shall return to their neutral

position automatically when released by the operator. A means shall be provided to disable all front primary functions and travel controls when the operator leaves the operator's station.

(c) The function of all controls (except as noted) shall be clearly identified by symbols on affixed labels or diagrams conforming to SAE J1362. Words may be used to complement such symbols or when appropriate symbols have not been standardized. All symbols shall be explained in the operator's manual along with control movement and sequence. The horn control shall be identified by a label or diagram.

- (03) (1) The function of controls obviously self-defined by standard practice such as steering wheel, turn signal, etc., or by mounting location such as heater switch or door handle when located on the unit are not required to be labeled.

(2) Where possible, the movement of all controls from their neutral position shall be in the same general direction as the movement of the functions that they control. In their neutral position, there shall be no movement of the functions.

### 25-1.5.2 Travel Controls

(a) Primary travel controls affect the following basic travel functions: speed, steering, travel direction, service brake (if provided), and clutch (if provided). Secondary controls affect other travel functions (if provided) such as transmission selector, emergency brake, parking brake, turn signal, etc.

(b) The location and direction of movement of the primary travel controls for wheel-mounted and crawler-mounted handlers are illustrated and described in Figs. 8 and 9, respectively. The direction of movement of functions that are controlled (forward, reverse, etc.) are relative to the handler in its normal mode as specified by the manufacturer.

### 25-1.5.3 Front Controls

(a) Primary front controls actuate the following on all handlers: boom, stick or arm, swing, magnet, grapple, and jib, if so equipped.

(b) Secondary front controls actuate other front functions (if provided) such as a combination grapple magnet.

(c) The location and direction of movement of the front controls and their functions are illustrated in Figs. 10 and 11. The direction of movement of the functions that are controlled (right, left, etc.) is relative to the operator when sitting in the operator position. An optional switch should be provided to allow switching of the front primary controls between attachments. This switch should be mounted on the console or other suitable location and shall be labeled to identify its function.

(d) The control arrangement shown in Figs. 10 and 11 are for the primary controls only, and shall be located

within the zones as set forth in SAE J898.

(e) The arrangement of secondary and auxiliary controls is not shown; however, they shall be so located as not to interfere with the operation of the primary controls.

(f) When more than one control location is offered for a function or function(s), one location should conform to the recommended practice. Other control locations and arrangements shall be at the discretion of the manufacturer or assembler/modifier.

(g) Control actuating forces shall comply with the values set forth in SAE J1814.

(h) The distance between control levers, adjacent foot pedals, handles, knobs, and other handler parts shall be sufficient to allow operation without unintentional actuation of adjacent controls. See SAE J1814 for suggested minimum clearances. The overlapping of controls is permissible to provide independent and simultaneous control application.

### 25-1.5.4 Auxiliary Controls

Auxiliary controls actuate all other functions that pertain to overall handler performance such as outriggers/stabilizers, engine speed, engine start and stop, swing brakes, horn, and steering selector.

## SECTION 25-1.6: CABS

### 25-1.6.1 Construction

(a) All cabs and enclosures shall be constructed to protect the upper-structure machinery and operator's station from the weather.

(b) All cab glazing shall be safety glazing material as defined in ANSI Z26.1. Windows shall be in all sides of the cab or operator's compartment. Visibility forward shall include a vertical range adequate to view the attachment when it is in its normal operating position. The front window may have a section that can be readily removed or held open. If the section is of the type held in the open position, it shall be secured to prevent inadvertent closure. The front window shall meet the requirements of ANSI Z26.1, Class 1.

(c) Protective guards shall be fitted when there is danger of flying or falling objects.


(1) For falling objects, a falling object guard structure with a top guard and front window guard meeting the requirements of SAE J1356.

(2) For flying objects, the front window may be laminated glass but all other windows shall be safety glazing plastics as defined in ANSI Z26.1.

(3) Restriction of visibility to the operator during normal operation shall be minimized.

(d) A windshield wiper should be provided on the front window. If the front window material is safety

Travel Control Arrangement  
(Viewed From Operator's Seat)

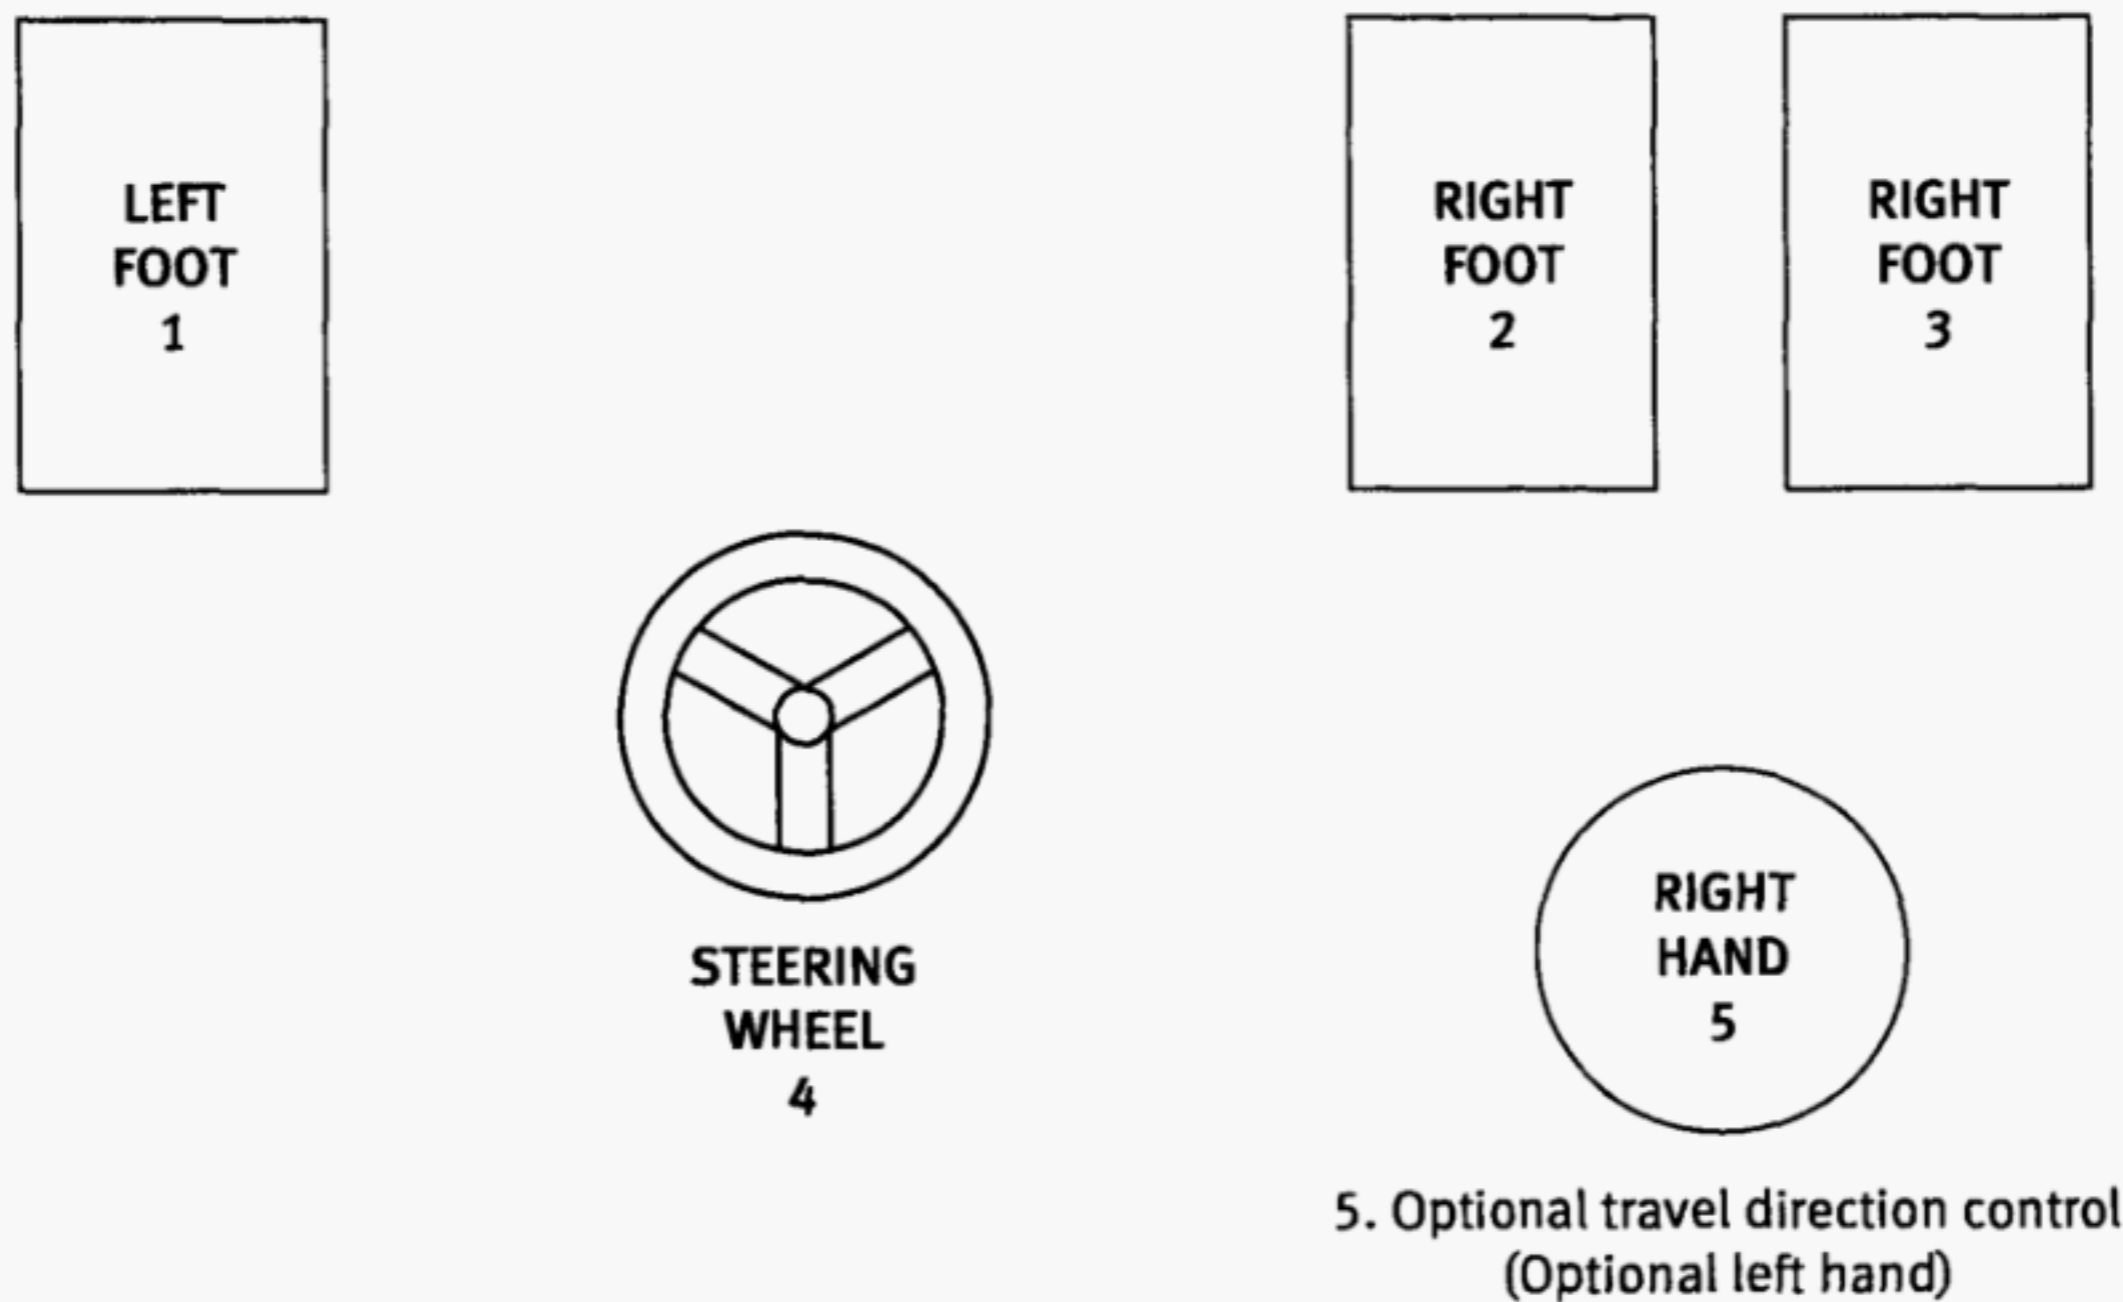

## Control

- (1) Clutch
- (2) Service brake
- (3) Speed and direction control
- (4) Steering control
- (5) Optional travel direction control

## Operation

Push to disengage  
 Push to engage  
 Toe movement — forward  
 Heel movement — reverse  
 Counterclockwise to turn left;  
 Clockwise to turn right  
 At the discretion of the  
 manufacturer

**Fig. 8 Wheel-Mounted Handler —  
Primary Travel Control Diagram**

glazing plastic and the handler is equipped with wind-shield wipers, a suitable surface treatment and a wind-shield washer shall be provided to resist scratching.

(e) All cab doors shall be restrained from inadvertent opening or closing while traveling or operating the handler. The door adjacent to the operator, if of the swinging type, should open outward and, if of the sliding type, should slide rearward to open.

(f) Two means of egress shall be provided: a door and a second exit. The second exit shall be located on any surface except the surface housing the door or the surface next to the boom section of the front.

(g) A seat belt shall be provided that meets the requirements of SAE J386.

(h) Any cab opening into the machinery section shall be covered with a fire-resistant door or panel in accordance with SAE J369.

(i) When a tipping cab is provided, safety signs shall be provided. These signs shall (03)

(1) describe the pinch points when tipping the cab


(2) notify that the cab must be secured in place before starting normal production operations of the equipment

## Two Pedal Travel Control Arrangement

Optional hand-operated levers can be used in place of foot-operated levers



**Fig. 9 Track-Mounted Handler — Primary Travel Control Diagram**

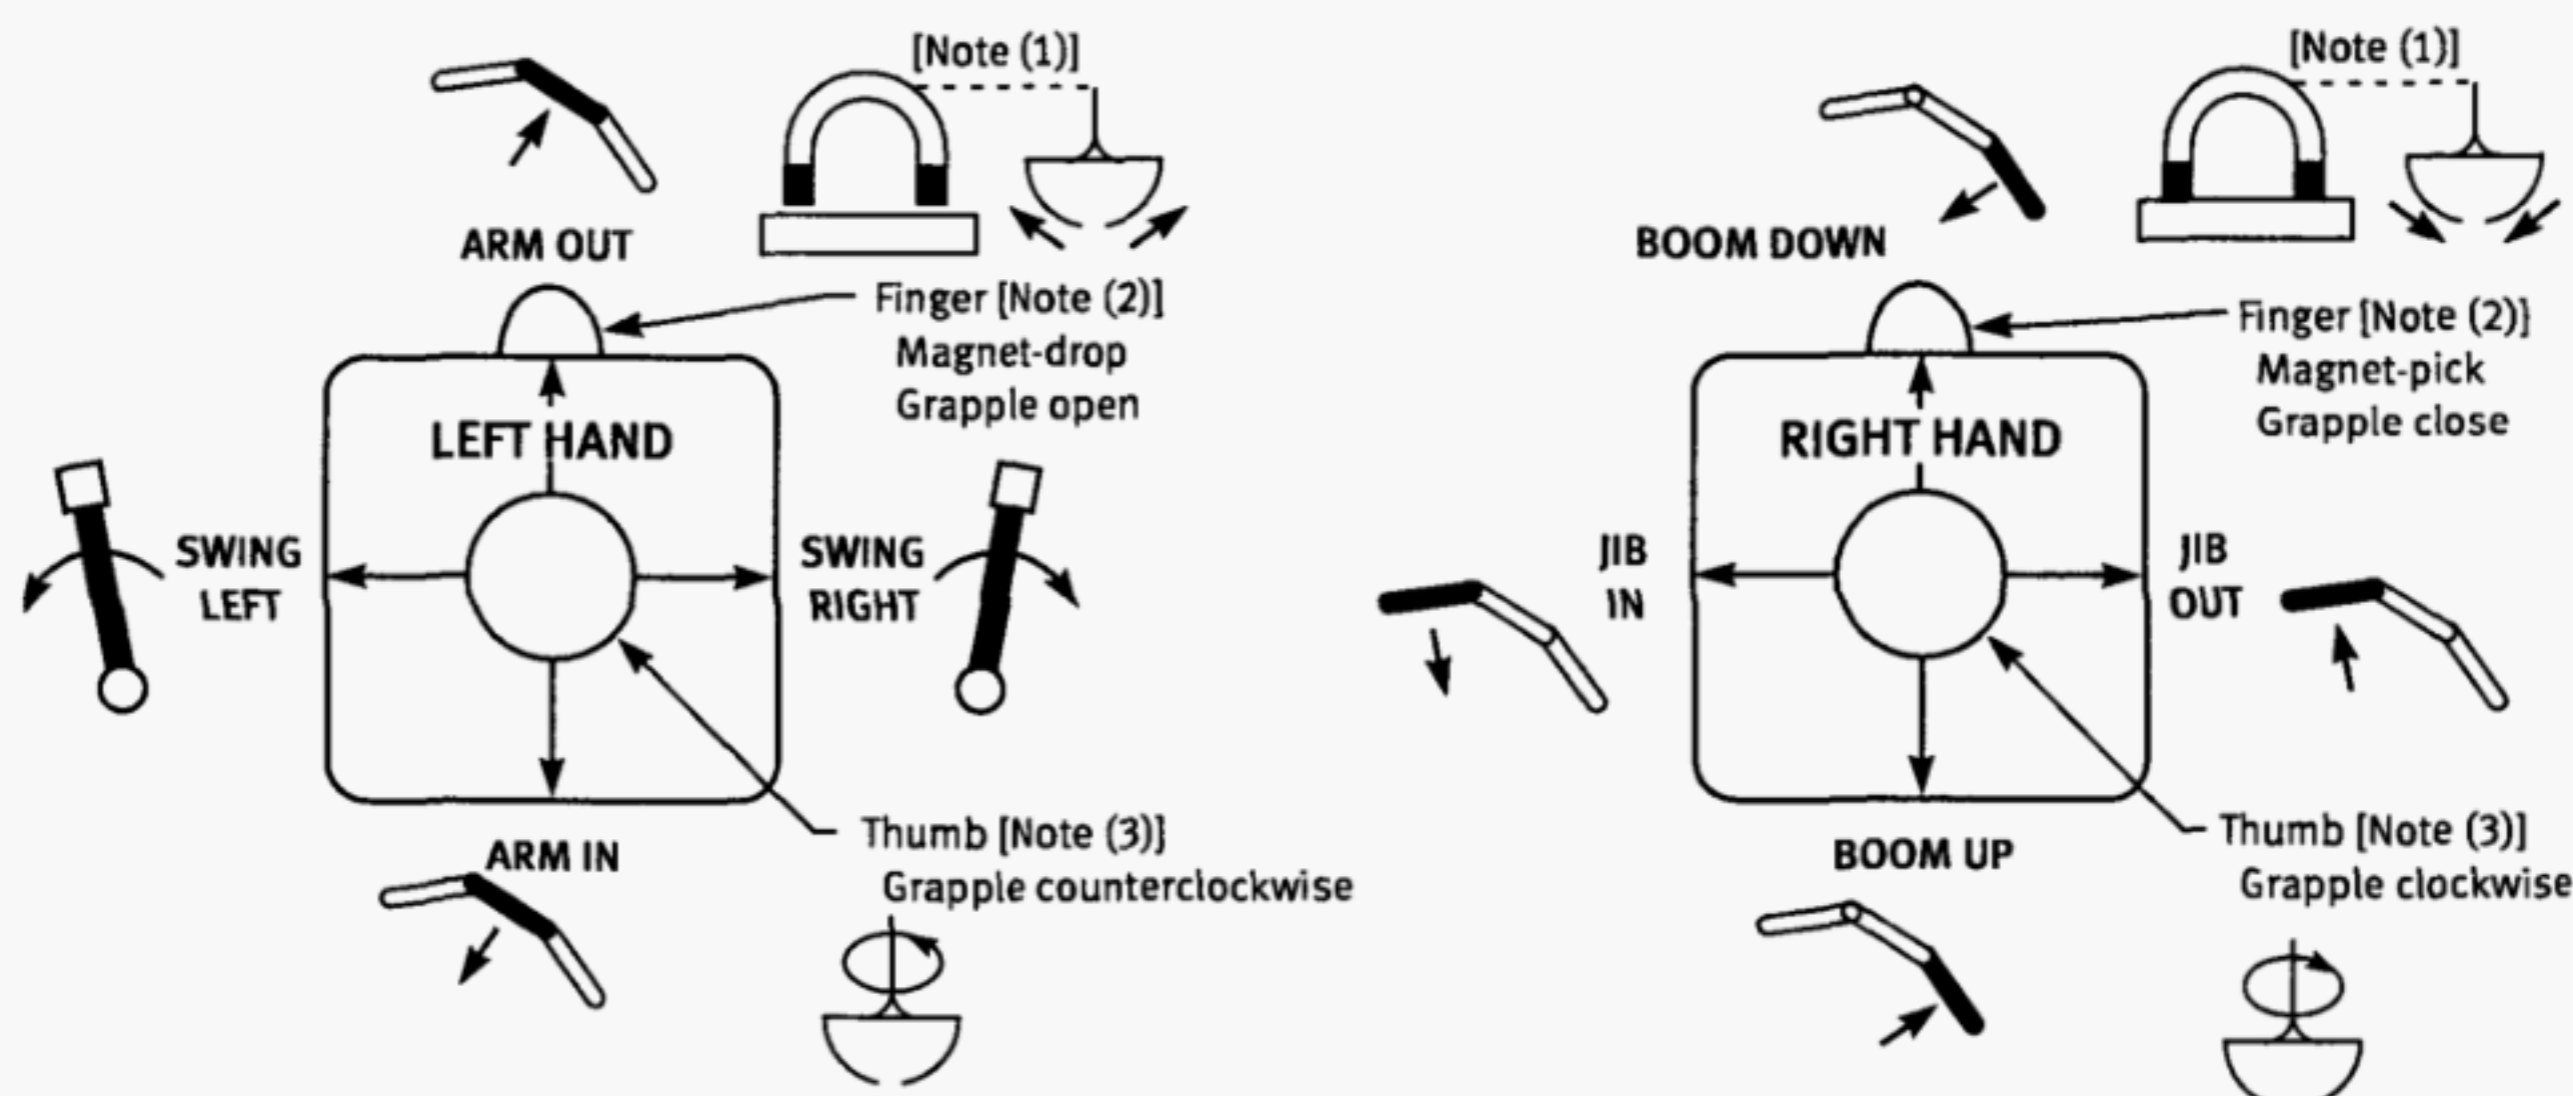Two Lever Control Arrangement  
(Viewed From Operator's Seat)

## NOTES:

- (1) An optional switch for magnet to grapple conversion.
- (2) Use of thumb is optional.
- (3) Use of finger is optional.

**Fig. 10 Primary Front Controls — Three-Piece Fronts**

(j) Rearview mirrors shall be installed to provide visibility along both sides of the handler. The mirrors shall be constructed of safety glazing material as defined in ANSI Z26.1.

#### 25-1.6.2 Platforms to Cab


(a) Outside platforms, if furnished, should comply with SAE J185.

(b) Platforms should be mounted to the rotating upper structure.

(c) Safety signs shall be provided to notify users that riders are not allowed on platforms during operation.

#### 25-1.6.3 Access to Cab

(a) Handholds and steps shall be provided to enter

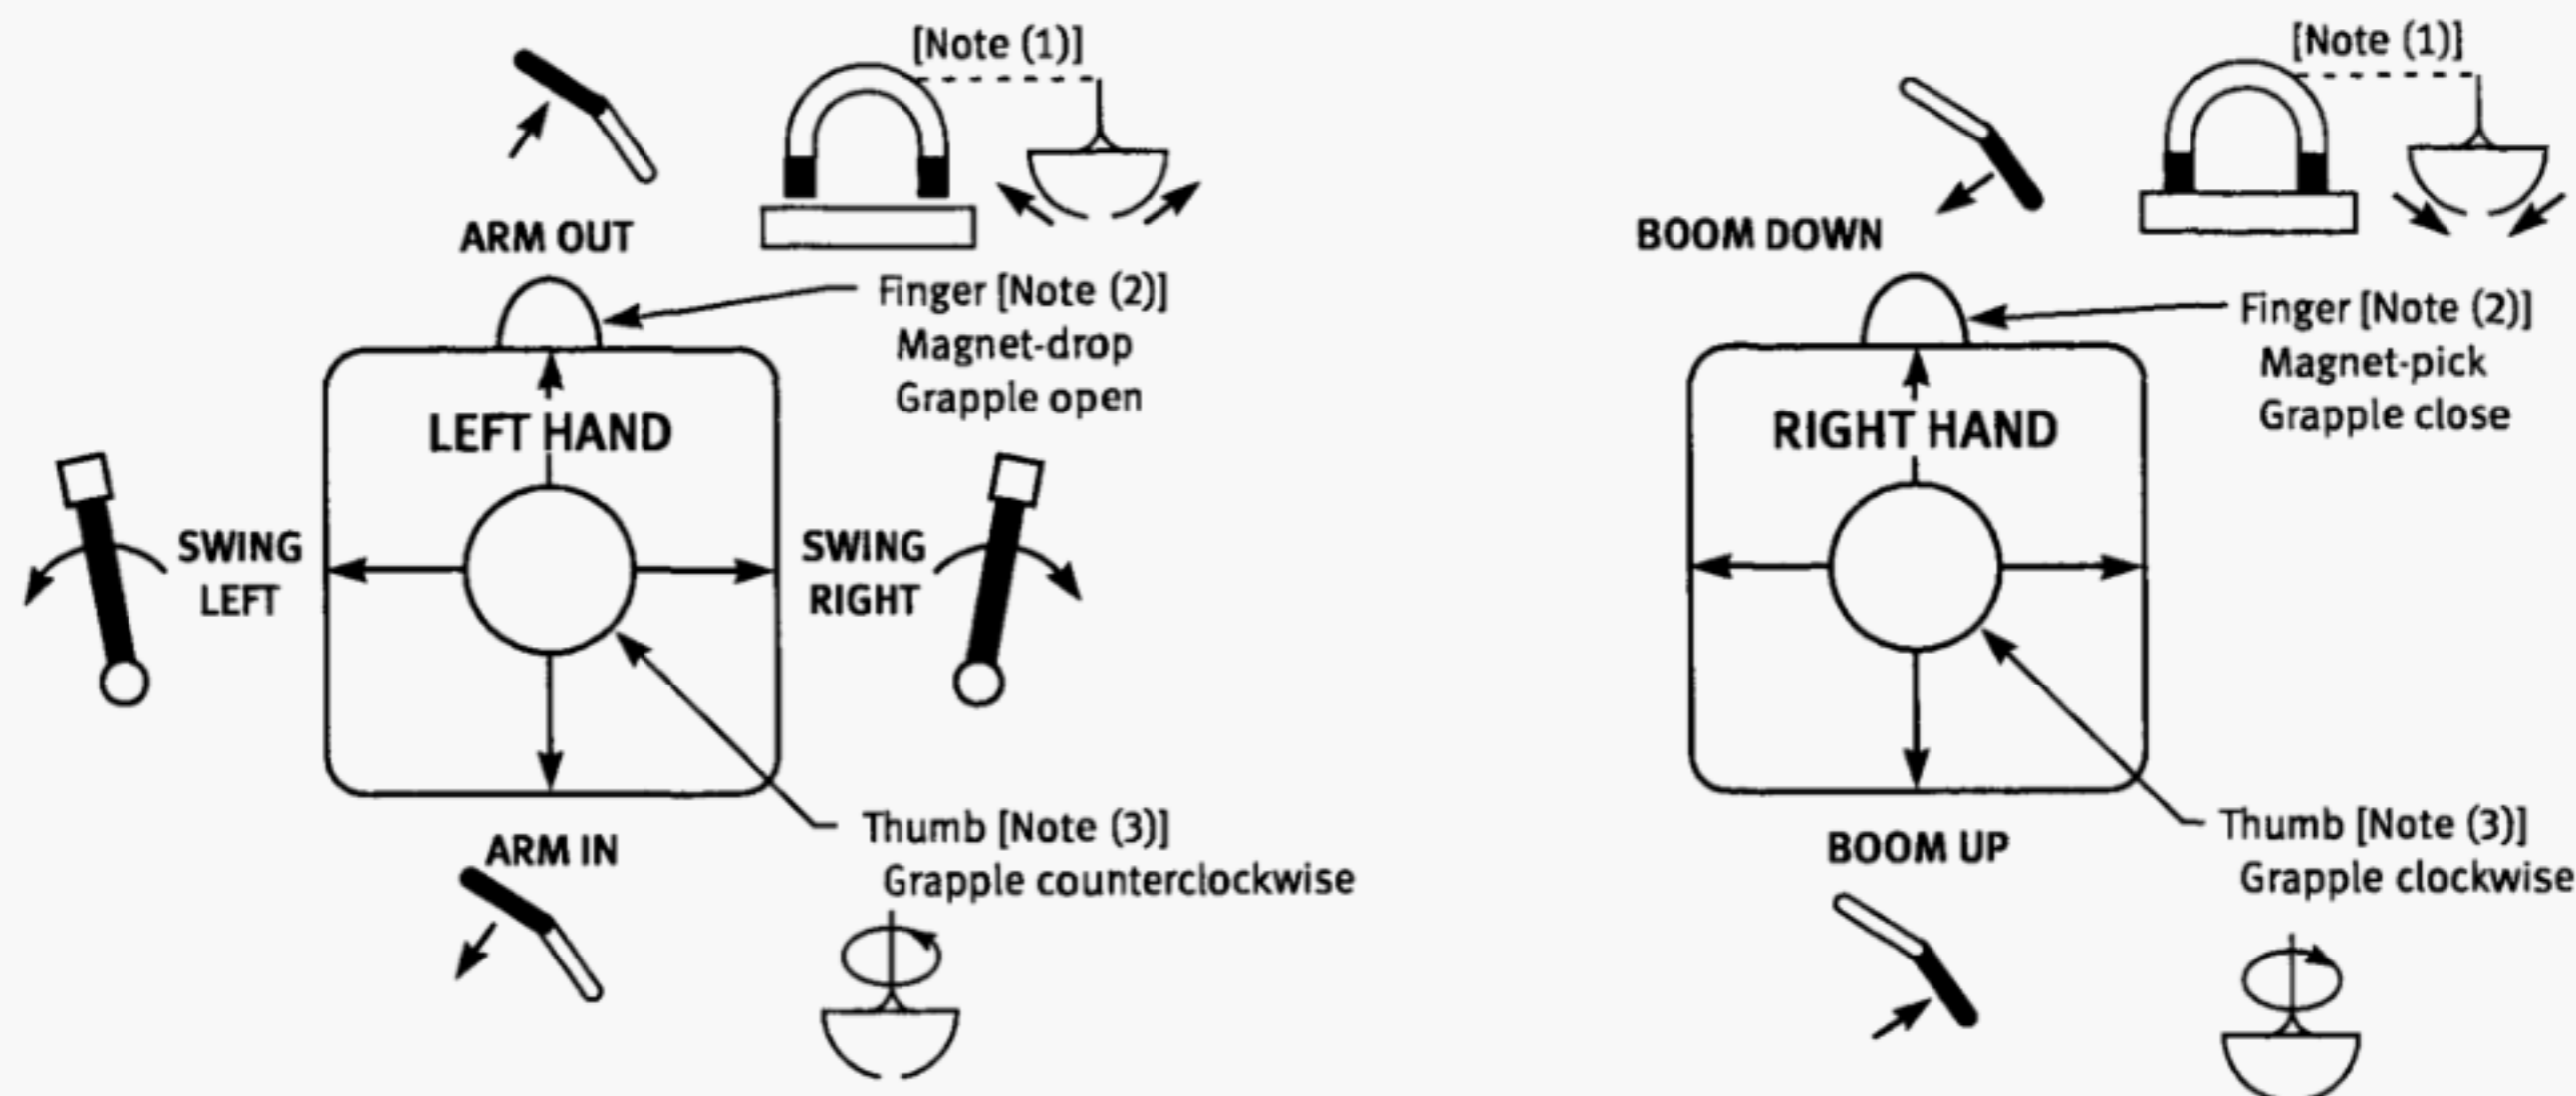

**Fig. 11 Primary Front Controls — Two-Piece Fronts**

and exit the cab and provide access to the machinery maintenance panels/doors and should be in accordance with SAE J185 and SAE J925.

(b) On rail-mounted equipment, construction of access systems shall conform to the requirements of the Safety Appliance Standards and Power Brakes Requirements of the Federal Railroad Administration.

(c) Safety signs that notify users of the following shall be provided:

- (1) riders are not allowed on steps during operation
- (2) face the access system and use three-point support during ingress and egress

## SECTION 25-1.7: GENERAL REQUIREMENTS

### 25-1.7.1 Identification

Each handler manufacturer shall attach a durable label that is legibly marked with the following information:

- (a) the assembler's/modifier's name and address
- (b) the assembler's/modifier's model identification for the handler
- (c) the handler manufacturer's name and address
- (d) the handler manufacturer's model identification and serial number
- (e) the front manufacturer's name and address
- (f) the front manufacturer's model identification and serial number
- (g) the weight of the counterweight provided on the handler

### 25-1.7.2 Exhaust Gases

(a) Engine exhaust gases shall be piped to the outside of the cab and discharged in a direction away from the operator. All exhaust pipes shall be guarded or insulated to prevent contact with personnel when performing routine service.

(b) Hydraulic, oil, and fuel lines shall not cross or run next to the exhaust system.

### 25-1.7.3 Fronts

(a) Fronts shall be used only for the purpose recommended by the front manufacturer.

(b) Handlers should be equipped with a device on the lifting end of the boom, arm, and jib cylinders that is intended to prevent the front from uncontrolled lowering in the event of a hydraulic line failure. (03)

### 25-1.7.4 Outriggers/Stabilizers

(a) Means shall be provided to hold all outriggers/stabilizers in the retracted position while traveling, and in the extended position when set for operating.

(b) Power-actuated jacks, where used, shall be provided with the means (such as integral load hold check valves on hydraulic cylinders, mechanical locks, etc.) to prevent loss of support under load.

(c) Each power-operated outrigger/stabilizer shall be visible to the operator or a signal person during extension or setting. (03)

(d) Means shall be provided for fastening outrigger floats to outriggers when in use.

#### 25-1.7.5 Rail-Mounted Handlers

(a) *Truck Wedges or Jacks.* Rail-mounted handlers shall be provided with removable wedges or jacks for transmitting loads from the base directly to the wheels without permitting the truck springs to function when handling loads. These wedges shall be removable, or the jacks releasable, in a manner positive for transit.

(b) *Truck Center Pins.* Each truck center pin shall be provided with a connecting means, such as a king bolt, to permit the truck weight to contribute to handler stability.

#### 25-1.7.6 Welded Construction

All repair welding procedures shall be performed by qualified persons. Welding on load-sustaining members shall be performed in accordance with ANSI/AWS D14.3. Where special steels or other materials are used, the manufacturer shall provide welding procedures.

Repair welding on structural components shall not be done before obtaining the manufacturer's or qualified person's recommendations.

#### 25-1.7.7 Guards for Moving Parts

(a) Exposed moving parts such as gears, set screws, projecting keys, chains, chain sprockets, and reciprocating or rotating parts that might constitute a hazard under normal operating conditions shall be guarded.

(b) Guards shall be fastened and shall be capable of supporting, without permanent distortion, the weight of a 200 lb (90 kg) person unless the guard is located where it is impossible for a person to step on it.

#### 25-1.7.8 Hydraulic and Pneumatic Line Protection

Exposed lines subject to damage should be protected.

#### 25-1.7.9 Lubricating Points

Lubricating points should be accessible without the necessity of removing guards or other parts.

#### 25-1.7.10 Handler Modifications

Structural modifications or additions and/or hydraulic modifications that affect the capacity or safe operation of the handler shall not be made without the written approval of the manufacturer, assembler/modifier, or a qualified person. Modifications to the handler affecting lifting capacity require a revised lift capacity chart.

#### 25-1.7.11 Miscellaneous

(a) The fuel tank filler pipe shall be located or protected so as not to allow spill or overflow to run onto the engine, exhaust, or electrical equipment of the handler being fueled.

(b) The toolbox, if provided, shall be nonflammable and secured to the handler.

(c) A horn shall be provided that can be operated while allowing the operator to maintain control of the primary function.

(d) A flashing light should be installed on equipment where the operator does not have a 360 deg unobstructed view. A single light may be mounted so that it has 360 deg visibility, or three lights may be used; one on each rear corner and one on the front corner opposite the operator. The light(s) shall activate whenever the swing and/or travel function is engaged.

(e) Means shall be provided for checking the manufacturer's specified pressure settings.

(f) A warning sign shall be installed, visible from the operator's station, warning that electrocution or serious bodily injury may occur unless a minimum clearance of 10 ft (3 m) is maintained between the handler or load for energized power lines up to 50 kV, and that greater clearances are required for higher voltages (refer to para. 25-3.4.9).

(g) Means shall be provided for the removal of air in each hydraulic circuit.

### SECTION 25-1.8: ELECTRICAL EQUIPMENT

(a) Magnet or electric motor power wiring and equipment shall comply with ANSI/NFPA 70.

(b) All handlers shall be equipped with a main power disconnect switch of the enclosed type and that is lockable in the open (off) position.

#### 25-1.8.1 Lifting Magnets

(a) A handler used with a lifting magnet shall comply with ASME B30.20, Chapter 20-4, Group IV (Remotely Operated Lifting Magnets). Persons shall not be in close proximity to an energized remotely operated lifting magnet, except for electrical testing. If a lifting magnet is used in close proximity to people, it shall comply with ASME B30.20, Chapter 20-3, Group III (Close Proximity Operated Lifting Magnets).

(b) A handler used with a lifting magnet that is powered by an on-board DC generator shall be equipped with a separate circuit switch that disconnects the power to the magnet, or disconnects excitation power to the DC generator and removes all power to the magnet. The switch shall be of the enclosed type with provisions for locking, flagging, or tagging in the open (off) position. Means for discharging the inductive energy of the magnet shall be provided.

(c) Indicator or signal lights shall be provided to indicate whether the power to a lifting magnet is on or off. This light shall be visible to the operator.

### SECTION 25-1.9: INSTRUCTION MANUALS

(a) The handler manufacturer or the assembler/modifier shall provide an instruction manual with every handler. A space in the cab for the safekeeping of the manual

shall be provided. In addition to operating and preventative maintenance instructions, the manual shall provide a statement of those factors that alter the handler's lifting capacity and to the degree to which it is affected.

(b) In addition to the data required on the lift capacity chart, the following information shall be provided in the operator's manual or in supplementary documents included with the handler:

(1) the manufacturer's or assembler's/modifier's name, model number, or designation

(2) the serial number of the scrap handling attachment, scrap grapple, and/or magnet

(3) the weight and load capacity of the grapple and/or magnet

(4) cautionary or warning notes relative to limitations on equipment and operating procedures

(5) hydraulic relief valve settings specified by the assembler/modifier

(6) hand signals

## Chapter 25-2

# Inspection, Testing, and Maintenance

### SECTION 25-2.1: INSPECTION

#### 25-2.1.1 General

The manufacturer or assembler/modifier shall furnish field assembly, operation, and maintenance information.

#### (03) 25-2.1.2 Inspection Classification

(a) *Initial Inspection.* Prior to initial use, all new handlers shall be inspected by a qualified person to verify compliance with the applicable provisions of this volume.

(b) *Inspection Intervals.* Inspection procedure for handlers in regular service are divided into two general classifications based upon the intervals at which inspection shall be performed. The intervals are dependant upon the nature of the critical components of the handler and the degree of their exposure to wear, deterioration, or malfunction. The two general classifications are herein designated as frequent and periodic, with respective intervals between inspections as defined below:

(1) *Frequent Inspection.* Visual examination by a designated person daily to monthly with records not required.

(2) *Periodic Inspection.* Complete inspection by a qualified person making records of apparent external conditions to provide the basis for a continuing evaluation. To be performed at one to twelve month intervals, or as specifically recommended by the manufacturer or assembler/modifier.

#### 25-2.1.3 Frequent Inspection

Items such as the following shall be inspected by a designated person for any malfunctions or damage at intervals as defined in para. 25-2.1.2(b)(1) or as specifically indicated by the manufacturer or assembler/modifier, including observation during operation for any malfunctions or damage that might appear between inspections. Any damage, such as those listed, shall be carefully examined and a determination made as to whether they constitute a hazard.

(a) all controls for maladjustment interfering with proper operation — daily

(b) all controls for excessive wear of components and contamination by lubricants or other foreign matter

(c) all safety devices for malfunction — daily

(d) all hydraulic components, connections, lines, and hoses, and particularly those hoses that flex in normal

operation of the handler's functions, should be visually inspected for evidence of leakage and physical condition — daily

(e) hooks, pins, clevises, shackles, and latches for deformation, chemical damage, cracks, and wear

(f) electrical apparatus including all controls, safety disconnects, DC generators, cables, leads, and connections for malfunctioning, signs of wear, corrosion, excessive deterioration, dirt, and moisture accumulation

(g) hydraulic system for proper oil level — daily

(h) tires for condition and recommended inflation pressure

(i) lifting magnets in accordance with ASME B30.20

(j) grapples for proper operation, deformation, cracks, and wear

#### 25-2.1.4 Periodic Inspection

Complete inspections of the handler shall be performed by a qualified person at intervals as generally defined in para. 25-2.1.2(b)(2), depending upon its activity, severity of service, and environment, or as specifically indicated by the manufacturer or assembler/modifier. These inspections shall include the requirements of para. 25-2.1.3 and, in addition, items such as the following. Any damage or malfunctions, such as those listed, shall be examined and determination made as to whether they constitute a hazard.

(a) deformed, cracked, or corroded members in the handler structure and entire front assembly

(b) loose or missing bolts, nuts, or other fasteners

(c) worn, cracked, or distorted parts such as pins, bearings, wheels, shafts, gears, rollers, locking and clamping devices, bumpers, and stops

(d) excessive wear on brake and clutch system parts

(e) gasoline, diesel, or electric power plants for performance and compliance with safety requirements

(f) excessively worn or damaged track drive components, wheels, or tires and rims

(g) travel steering, braking, and locking devices, for malfunction

(h) hydraulic and pneumatic hose, fittings, and tubing inspection:

(1) evidence of leakage at the surface of the flexible hose or its junction with the metal couplings

(2) blistering or abnormal deformation of the outer covering of the hydraulic or pneumatic hose

(3) leakage at threaded or clamped joints that cannot be eliminated by normal tightening or recommended procedures

(4) evidence of excessive abrasion or scrubbing on the outer surface of a hose, rigid tube, or fitting

(i) hydraulic and pneumatic pumps and motors:

- (1) loose bolts or fasteners
- (2) leaks at joints between sections
- (3) shaft seal leaks
- (4) unusual noises or vibration
- (5) loss of operating speed
- (6) excessive heating of the fluid
- (7) loss of pressure

(j) hydraulic and pneumatic valves:

- (1) cracks in valve housing
- (2) improper return of spool to neutral position
- (3) leaks at spools or joints
- (4) sticking spools
- (5) failure of relief valves to attain correct pressure setting

(6) relief valve pressures shall be checked as specified by the manufacturer or assembler/modifier

(k) hydraulic and pneumatic cylinders:

- (1) drifting caused by fluid leaking across the piston seals
- (2) rod seals leakage
- (3) leaks at welded joints
- (4) scored, nicked, or dented cylinder rods
- (5) dented case (barrel)
- (6) loose or deformed rod eyes or connecting joints

(l) hydraulic filters:

(1) evidence of rubber particles on the filter element may indicate hose, "O" ring, or other rubber component deterioration. Metal chips or pieces on the filter may denote failure in pumps, motors, or cylinders. Further checking will be necessary to determine the origin of the problem before corrective action can be taken.

(m) engine filters

### 25-2.1.5 Handlers Not in Regular Use

(a) A handler that has been idle for a period of two months or more, but less than six months, shall be given an inspection by a qualified person conforming with the requirements of para. 25-2.1.3 before being placed in service.

(b) A handler that has been idle for a period of over six months shall be given a complete inspection by a qualified person conforming with the requirements of paras. 25-2.1.3 and 25-2.1.4 before being placed in service.

(c) Standby handlers shall be inspected by a qualified person at least semiannually in accordance with the requirements of para. 25-2.1.3. Handlers that are exposed to adverse environmental conditions should be inspected more frequently.

### 25-2.1.6 Inspection Records

(a) Dated records for periodic inspections shall be made on critical items such as brakes, structural members, hydraulic and pneumatic cylinders, and hydraulic and pneumatic relief pressure valves.

(b) Records for magnets shall be in accordance with ASME B30.20, and records for grapples (when used) shall be in accordance with the grapple manufacturer's recommendations. All records should be kept where they are available to appointed personnel.

## SECTION 25-2.2: TESTING

### 25-2.2.1 Operational Tests

(a) Each handler shall be tested and the results recorded by the manufacturer or assembler/modifier to the extent necessary to verify compliance with the operational requirements of this Section, including functions such as the following:

- (1) front functions
- (2) swinging
- (3) traveling
- (4) proper operation of all other controls
- (5) operation of all safety devices

(b) Where the complete production handler is not supplied by one manufacturer, such tests shall be conducted at final assembly by the assembler/modifier.

(c) Operational handler test results shall be made available.

## SECTION 25-2.3: MAINTENANCE

(a) A preventive maintenance program should be based on recommendations by the handler's manufacturer or assembler/modifier. A qualified person should be consulted if additional recommendations based upon review of the handler application and operation are required. Dated records should be placed on file.

(b) Replacement parts should be obtained from the original equipment manufacturer.

### 25-2.3.1 Maintenance Procedure

(a) Before adjustments and repairs are started on a handler, the following precautions shall be taken as applicable:

- (1) handler placed on firm level surface where it will cause the least interference with other equipment or operations in the area
- (2) the front lowered to the ground, if possible, or otherwise secured against movement
- (3) all controls placed in the off position and all operating functions secured from inadvertent motion
- (4) the engine is shut down; disconnect and lock the main power disconnect switch in the open (off) position
- (5) starting means are rendered inoperative

(6) hydraulic and pneumatic pressure relieved from all circuits before loosening or removing hydraulic components

(b) "Warning" or "Out of Order" signs shall be placed on the handler controls. For rail-mounted handlers, "blue flag" protection shall be employed. Signs or flags shall be removed only by designated personnel.

(c) After adjustments and repairs have been made, the handlers shall not be returned to service until all guards have been reinstalled, trapped air removed from the hydraulic system, safety devices reactivated, and maintenance equipment removed.

### 25-2.3.2 Adjustments and Repairs

(a) Any hazardous condition disclosed by the inspection requirements of Section 25-2.1 shall be corrected before operation of the handler is resumed. Adjustments and repairs shall be done only by qualified personnel.

(b) Adjustments shall be maintained to ensure correct functioning of components. The following are examples:

- (1) functional operating mechanisms
- (2) safety devices
- (3) control systems
- (4) engine and hydraulic systems

(5) braking systems

(c) Repairs or replacements shall be provided as needed for operation. The following are examples:

(1) critical parts of functional operating mechanisms that are cracked, broken, corroded, bent, or excessively worn.

(2) critical parts of the handler's structure that are cracked, bent, broken, or excessively corroded.

(3) damaged or worn pins, clevises, and shackles. Repairs by welding or reshaping are not recommended.

(d) Replacement parts should be purchased from the original equipment manufacturer. (03)

### 25-2.3.3 Lubrication

(a) All moving parts of the handler, for which lubrication is specified, should be regularly lubricated. Lubricating systems should be checked for proper delivery of lubricant. Care should be taken to follow the manufacturer's recommendations as to the points and frequency of lubrication, maintenance of lubricant levels, and types of lubricant to be used.

(b) Machinery shall be stationary while lubricants are being applied and protection provided as called for in paras. 25-2.3.1(a)(1) through 25-2.3.1(a)(5), unless equipped for automatic or remote lubrication.

## Chapter 25-3 Operation

### SECTION 25-3.1: QUALIFICATIONS FOR AND CONDUCT OF OPERATORS AND OPERATING PRACTICES

#### 25-3.1.1 Qualified Operators

(a) Handlers shall be operated only by the following personnel:

- (1) qualified operators
- (2) qualified trainees under the direct supervision of a designated and qualified operator
- (3) maintenance personnel who have completed all trainee qualifications when such are necessary in the performance of their duties
- (4) authorized inspectors who have completed all training qualifications when such are necessary in the performance of their duties for the type of handler being inspected

(b) No one other than personnel specified in para. 25-3.1.1(a) shall enter a handler cab, with the exception of supervisors or individuals authorized by a supervisor whose duties require them to do so, and then only in the performance of their duties.

(c) Operators shall wear the seat belt provided when operating the handler.

#### 25-3.1.2 Requirements for Qualified Operators

(a) Operators shall meet the following physical qualifications unless it can be shown that failure to meet the qualifications will not affect the operation of the handler:

- (1) vision of at least 20/30 Snellen in one eye and 20/50 in the other, with or without corrective lenses.
- (2) ability to distinguish colors, regardless of position, if color differentiation is required.
- (3) adequate hearing, to meet operational demands, with or without hearing aid.
- (4) sufficient strength, endurance, agility, coordination, and speed of reaction to meet operational demands.
- (5) sufficient depth perception, field of vision, reaction time, manual dexterity, and coordination to meet operational demands.

(6) medical evidence that an operator is not subject to seizures or loss of physical control, which could render a hazard to the operator or others.

(7) each operator or operator trainee shall successfully pass with a negative result, a substance abuse test. The level of testing will be determined by the standard practice for the industry where the handler is employed, and this test shall be confirmed by a recognized laboratory service.

(b) Operator skill requirements shall include

(1) the ability to read and understand the manufacturer's operation and instruction manual (refer to Section 25-1.9)

(2) evidence of successfully meeting the physical qualifications defined in para. 25-3.1.2(a)

(3) satisfactory demonstration of knowledge covering handler lift capacity, operational characteristics, travel, controls, use of attachments, and casualty control skills in response to potentially hazardous incidents such as fire, power line contact, loss of stability, or control malfunctions, as well as characteristics and performance issues appropriate to the handler type for which the individual is being qualified

(4) satisfactory completion of an operation test demonstrating proficiency with the specific type handler for which the individual is being qualified, including both pre-start and post-start inspection, maneuvering skills, shutdown, and securing procedures

(c) Satisfactory demonstration of operator requirements defined in para. 25-3.1.2(b) shall be determined and recorded by a qualified person.

### SECTION 25-3.2: HANDLING THE LOAD

#### 25-3.2.1 Size of Load

(a) No operator shall attempt to lift a load in excess of the handler's specified lift capacity.

(b) When loads, which are not accurately known, are to be lifted, the person responsible for the lift shall determine that the weight of the load does not exceed the handler's rating at the radius and height at which the load is to be lifted.

#### 25-3.2.2 Holding the Load

(a) The operator shall not leave the controls while a load is suspended.

(b) No person shall be permitted to stand or pass under a suspended load.

#### 25-3.2.3 Moving the Load

(a) The operator shall verify that

- (1) the handler is on firm footing
- (2) the lift and swing path is clear of obstructions
- (3) all persons are clear of the swing radius of the handler and the outrigger/stabilizer (03)

(b) During lifting operations, care should be taken that the load, front, or other parts of the handler do not contact any obstruction.

(c) The operator should avoid carrying loads over people.

(d) When two or more handlers are used to lift one load, one designated person shall be responsible for the operation. That person shall analyze the operation and instruct all personnel involved in the proper positioning, and the movements to be made.

(e) Before traveling a handler with a load, it shall be determined that this practice is not prohibited by the manufacturer. The operator or designated person shall determine the safest load position, front location, ground support, travel route, and speed of movement. The front should be carried in line with the direction of travel. If necessary, a tag or restraint line should be used to control swinging of the load.

(f) When rotating the handler, the rotational speed shall be such that the load and/or lifting device does not swing out beyond a radius at which it can be controlled.

(g) Personnel shall not be permitted to ride on lifting devices or any other part of the handler that is not designated for this purpose by the manufacturer.

#### (03) 25-3.2.4 Personnel

(a) Lifting of personnel with a handler is prohibited.

(b) Personnel shall not be permitted to ride on lifting devices or any other part of the handler that is not designated for this purpose by the manufacturer.

### SECTION 25-3.3: SIGNALS

#### 25-3.3.1 Standard Signals

Signals to the operator shall be in accordance with the standards prescribed in para. 25-3.3.2 unless voice communication equipment (telephone, radio, or equivalent) is utilized. Signals shall be discernible or audible at all times. No response shall be made unless signals are clearly understood.

#### 25-3.3.2 Hand Signals

The hand signals used shall be in accordance with Fig. 12 and shall be provided or posted conspicuously at the jobsite, for use of both signalperson and operator.

#### 25-3.3.3 Special Signals

For operations not covered by para. 25-3.3.2, or for special conditions that occur from time to time, additions to, or modifications of, the standard signals may be required. In such cases, these special signals shall be agreed upon in advance by both the operator and the signalperson, and should not be in conflict with any standard signals.

#### 25-3.3.4 Instructions

If it is desired to give instructions to the operator, other than those provided by the established signal system, all handler motions shall be stopped.

### SECTION 25-3.4: MISCELLANEOUS

#### 25-3.4.1 Cab Protection

Operator cab protection devices shall be chosen by the user. Refer to para. 25-1.6.1(c).

#### 25-3.4.2 Rail Clamps

Rail clamps, if used, shall have some slack between the point of attachment to the rail and the end fastened to the handler. Rail clamps shall not be used as a means of restraining tipping during handler operation.

#### 25-3.4.3 Ballast or Counterweight

Handlers shall not be operated without the manufacturer's or assembler's/modifier's specified ballast or counterweight being in place. Under specific conditions, such as during assembly, unusual front configurations, etc., the manufacturer's or assembler's/modifier's recommendations for the amount of ballast or counterweight shall be adhered to. The maximum ballast or counterweight approved by the manufacturer or assembler/modifier for use on a given handler shall not be exceeded.

#### 25-3.4.4 Rerailing Rail-Mounted Handlers

If a rail-mounted handler has been derailed, a wrecking frog or car replacer (or its equivalent) should be used and the handler should be hauled back onto the track by external power.

#### 25-3.4.5 Swinging Rail-Mounted Locomotive Handlers

A rail-mounted handler shall not be swung into a position until it has been ascertained that cars are not being moved on the adjacent track and that proper flag protection has been established.

#### 25-3.4.6 Footing

Firm footing under both crawler tracks, all tires, or individual outrigger pads shall be provided. Where such a footing is not otherwise supplied, it shall be provided by timbers, cribbing, or other structural members to distribute the load so as not to exceed the allowable bearing capacity of the underlying material.

#### 25-3.4.7 Storage

(a) Necessary clothing and personal belongings shall be stored in such a manner as to not interfere with access or operation.

(b) Tools, oil cans, waste, and other necessary articles shall be stored in the toolbox (if provided), and shall not be permitted to lie loose in or about the cab.

#### 25-3.4.8 Refueling

(a) When refueling with gasoline using a portable container, it shall be a safety-type can equipped with an

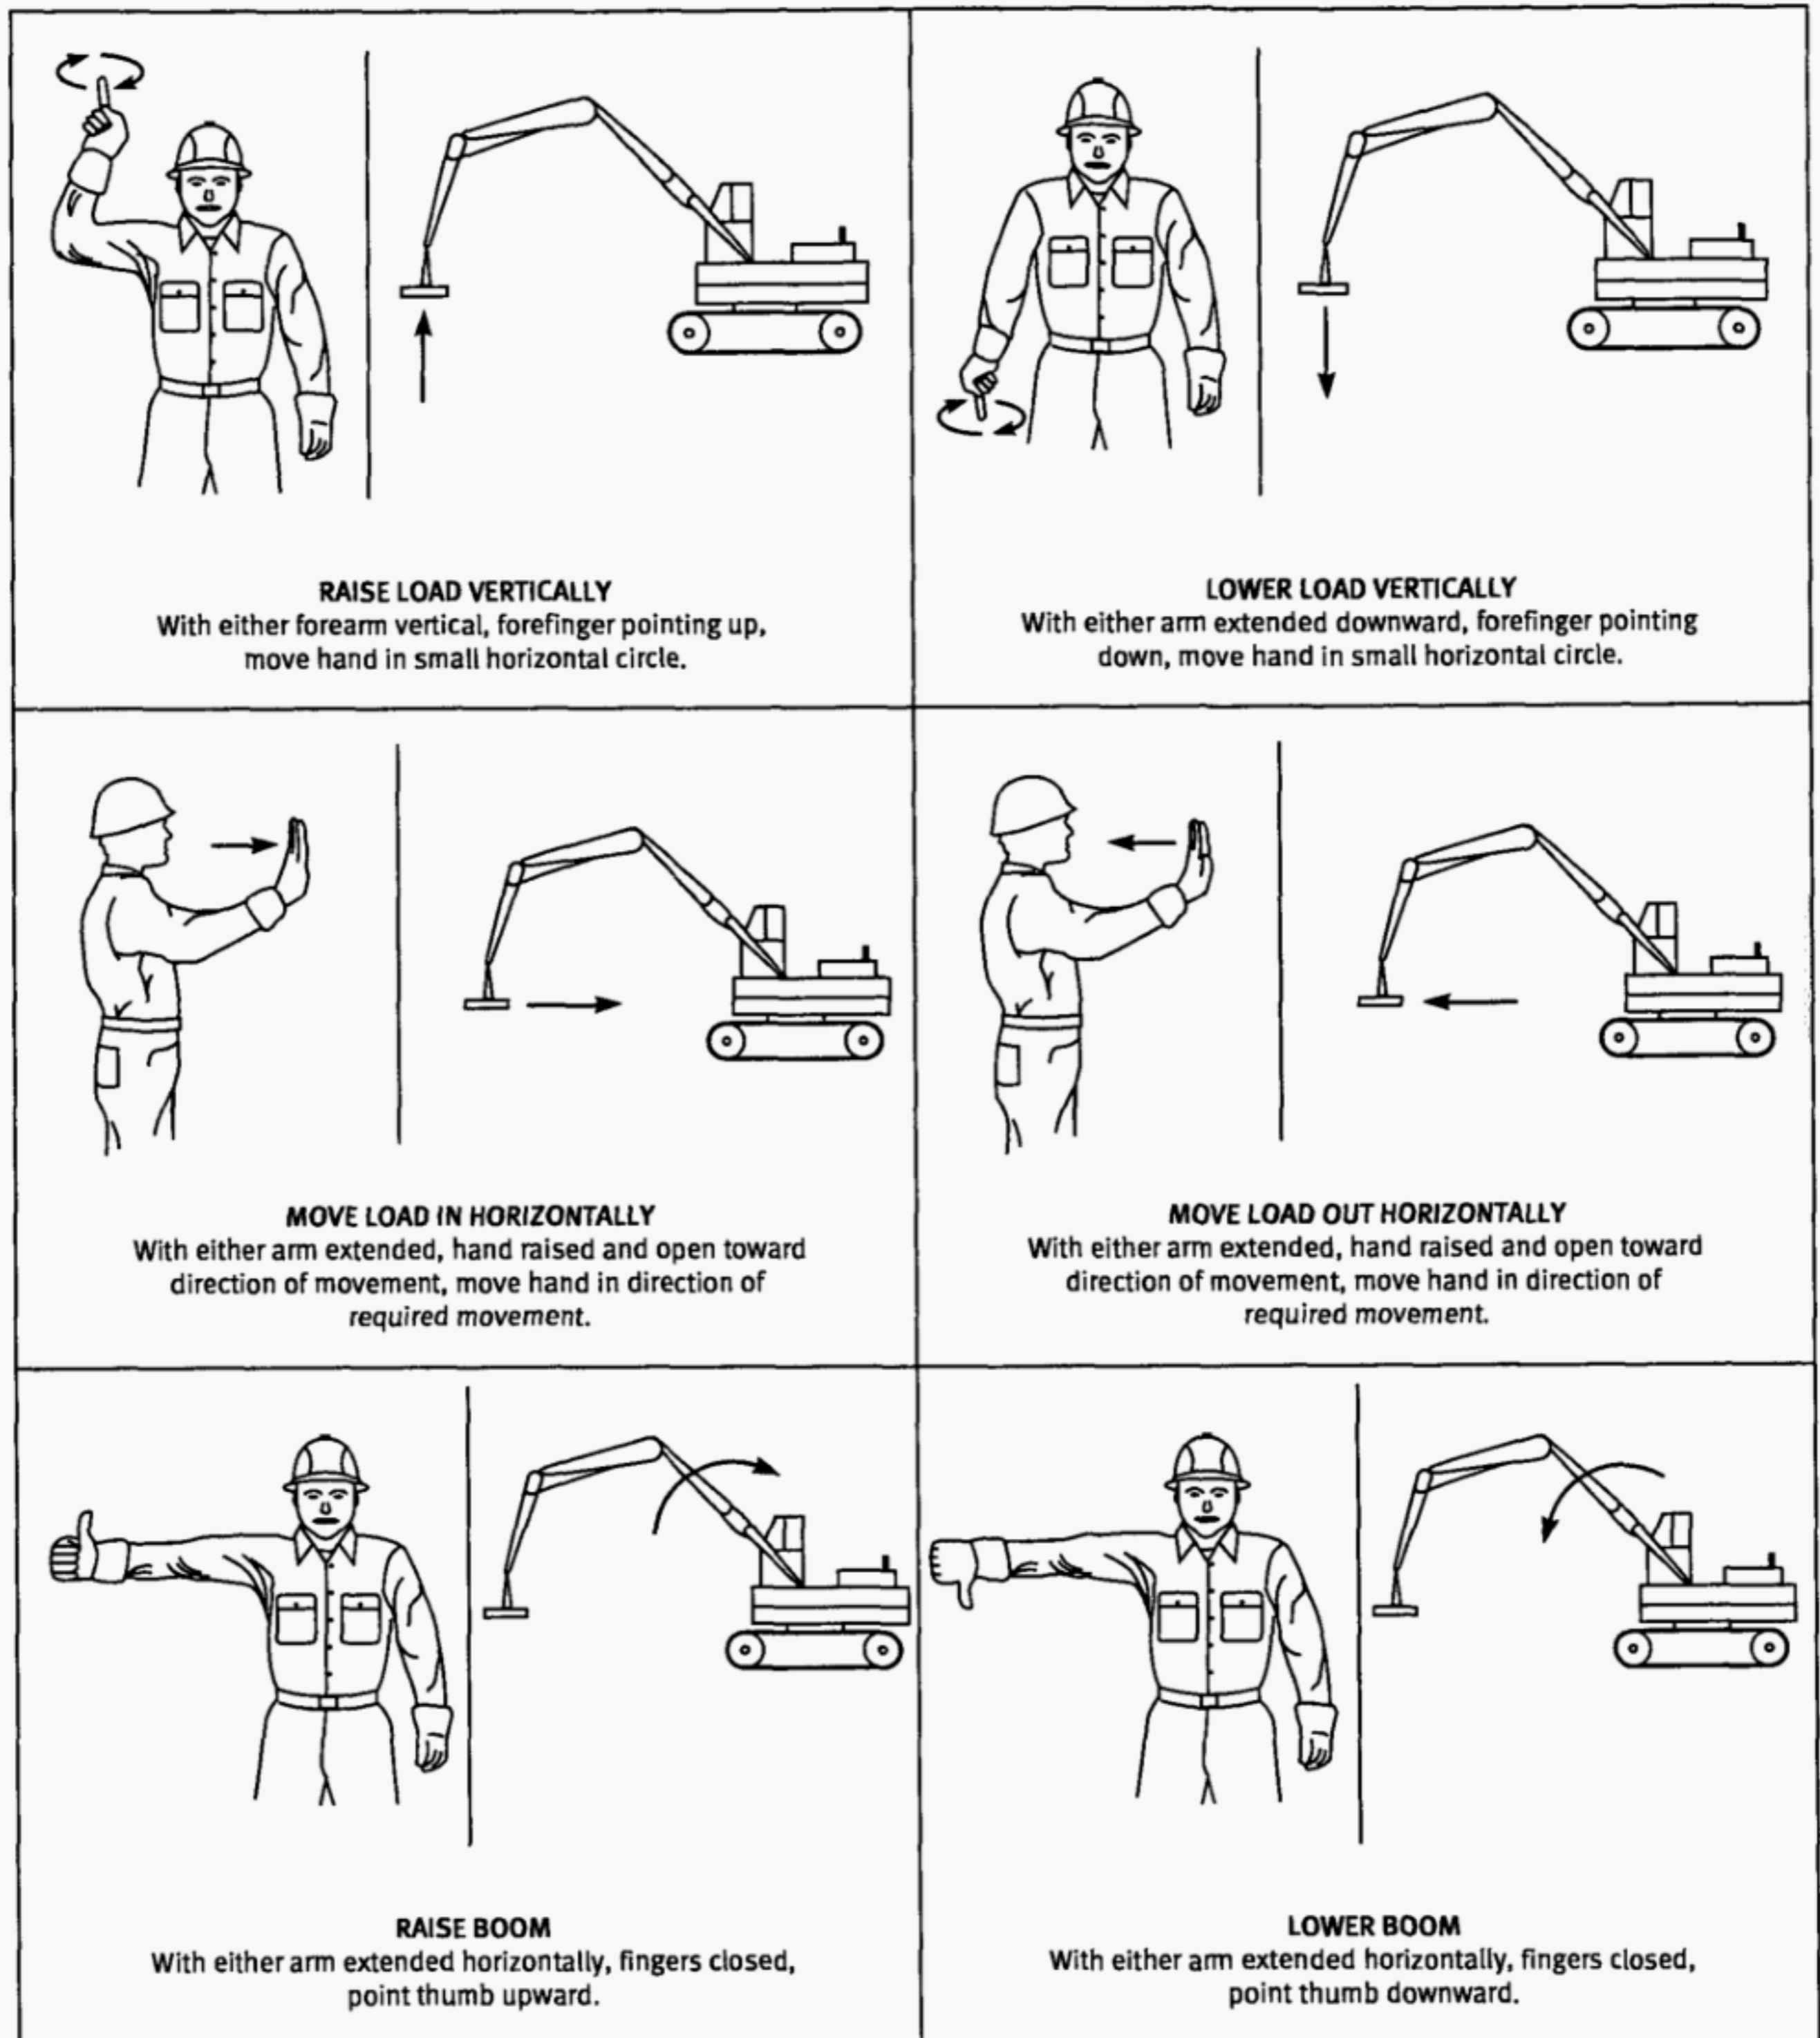


Fig. 12 Material Handler Hand Signals

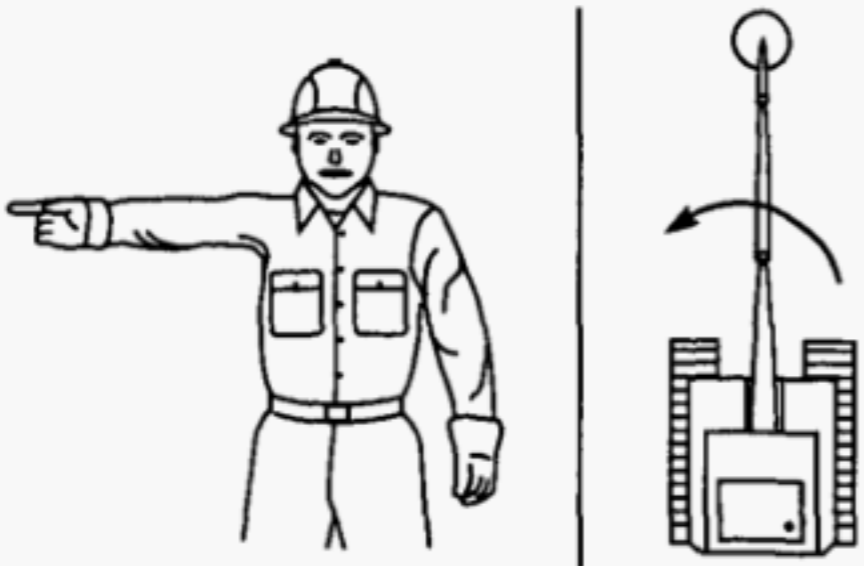
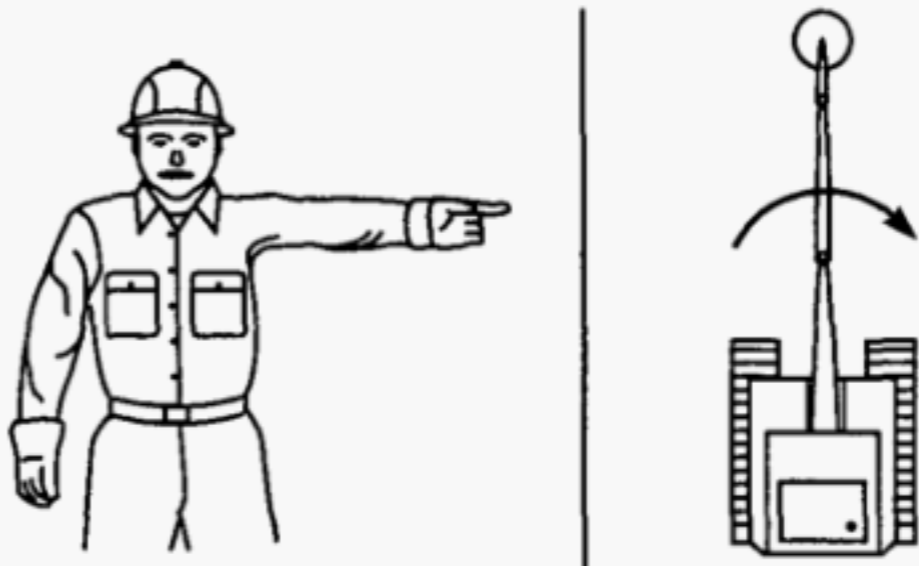
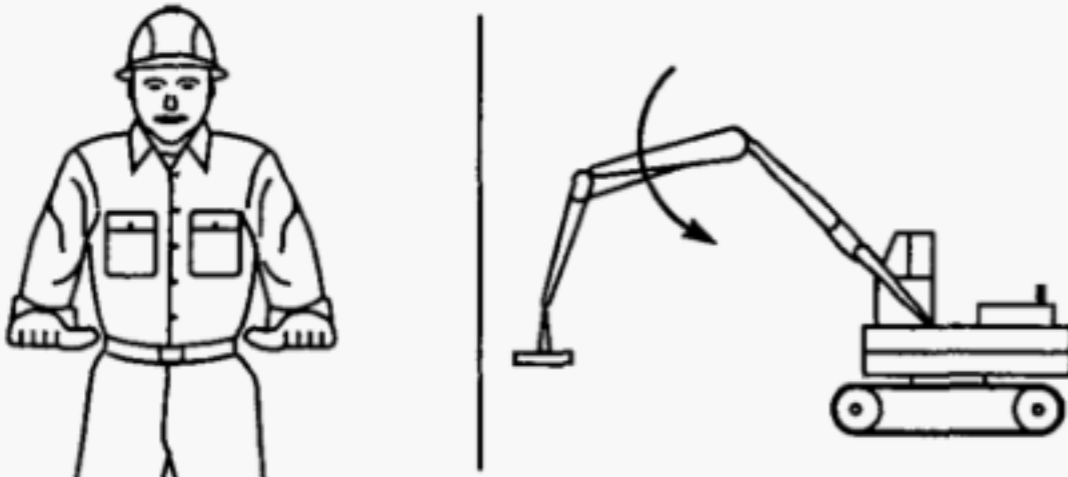
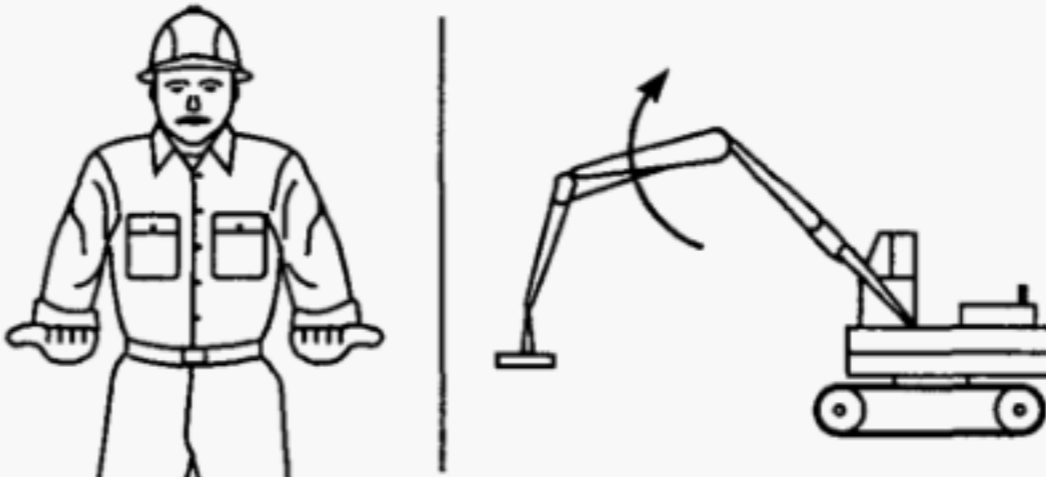
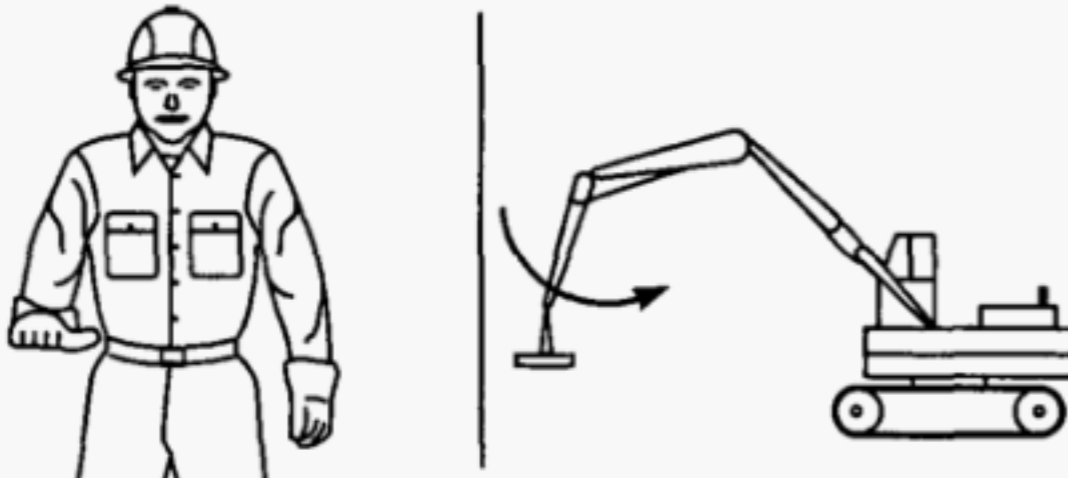
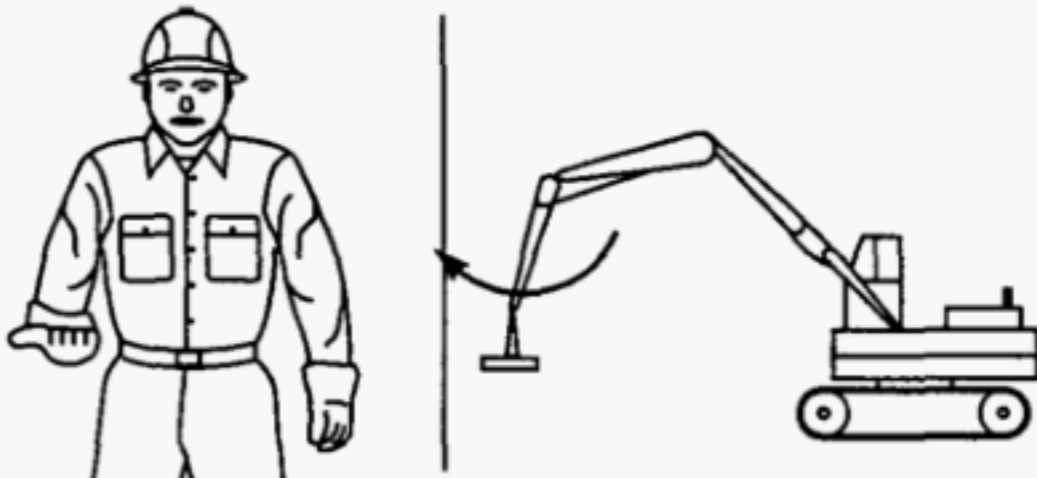
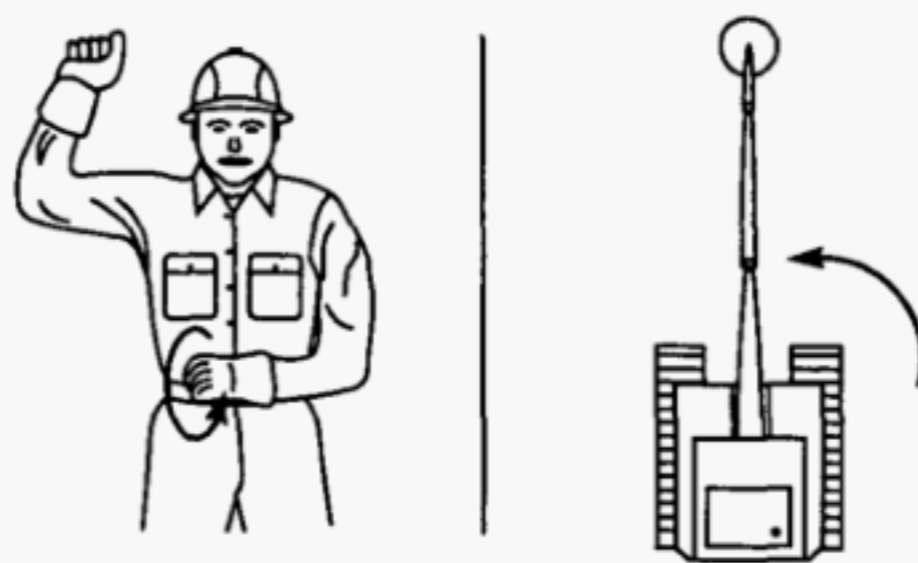
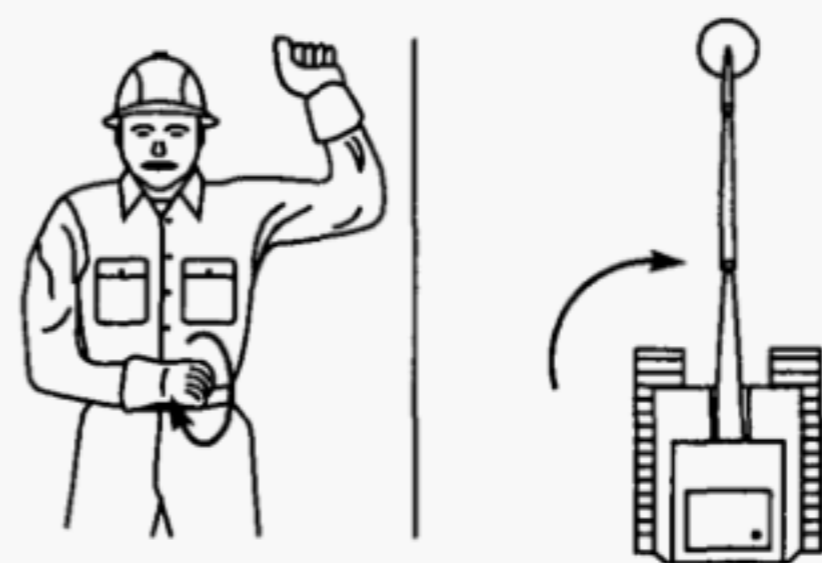
 <p><b>SWING</b> With either arm extended horizontally, point with forefinger to direction of swing rotation.</p>	 <p><b>SWING</b> With either arm extended horizontally, point with forefinger to direction of swing rotation.</p>
 <p><b>ARM INWARD</b> With both hands clenched, point thumbs inward.</p>	 <p><b>ARM OUTWARD</b> With both hands clenched, point thumbs outward.</p>
 <p><b>JIB INWARD</b> With either arm outstretched horizontally in front of body, close fingers and point thumb in direction of required movement.</p>	 <p><b>JIB OUTWARD</b> With either arm outstretched horizontally in front of body, close fingers and point thumb in direction of required movement.</p>
 <p><b>TURN</b> Raise forearm with closed fist indicating inside of turn. Move other fist in vertical circle indicating direction of track or wheel rotation.</p>	 <p><b>TURN</b> Raise forearm with closed fist indicating inside of turn. Move other fist in vertical circle indicating direction of track or wheel rotation.</p>

Fig. 12 Material Handler Hand Signals (Cont'd)


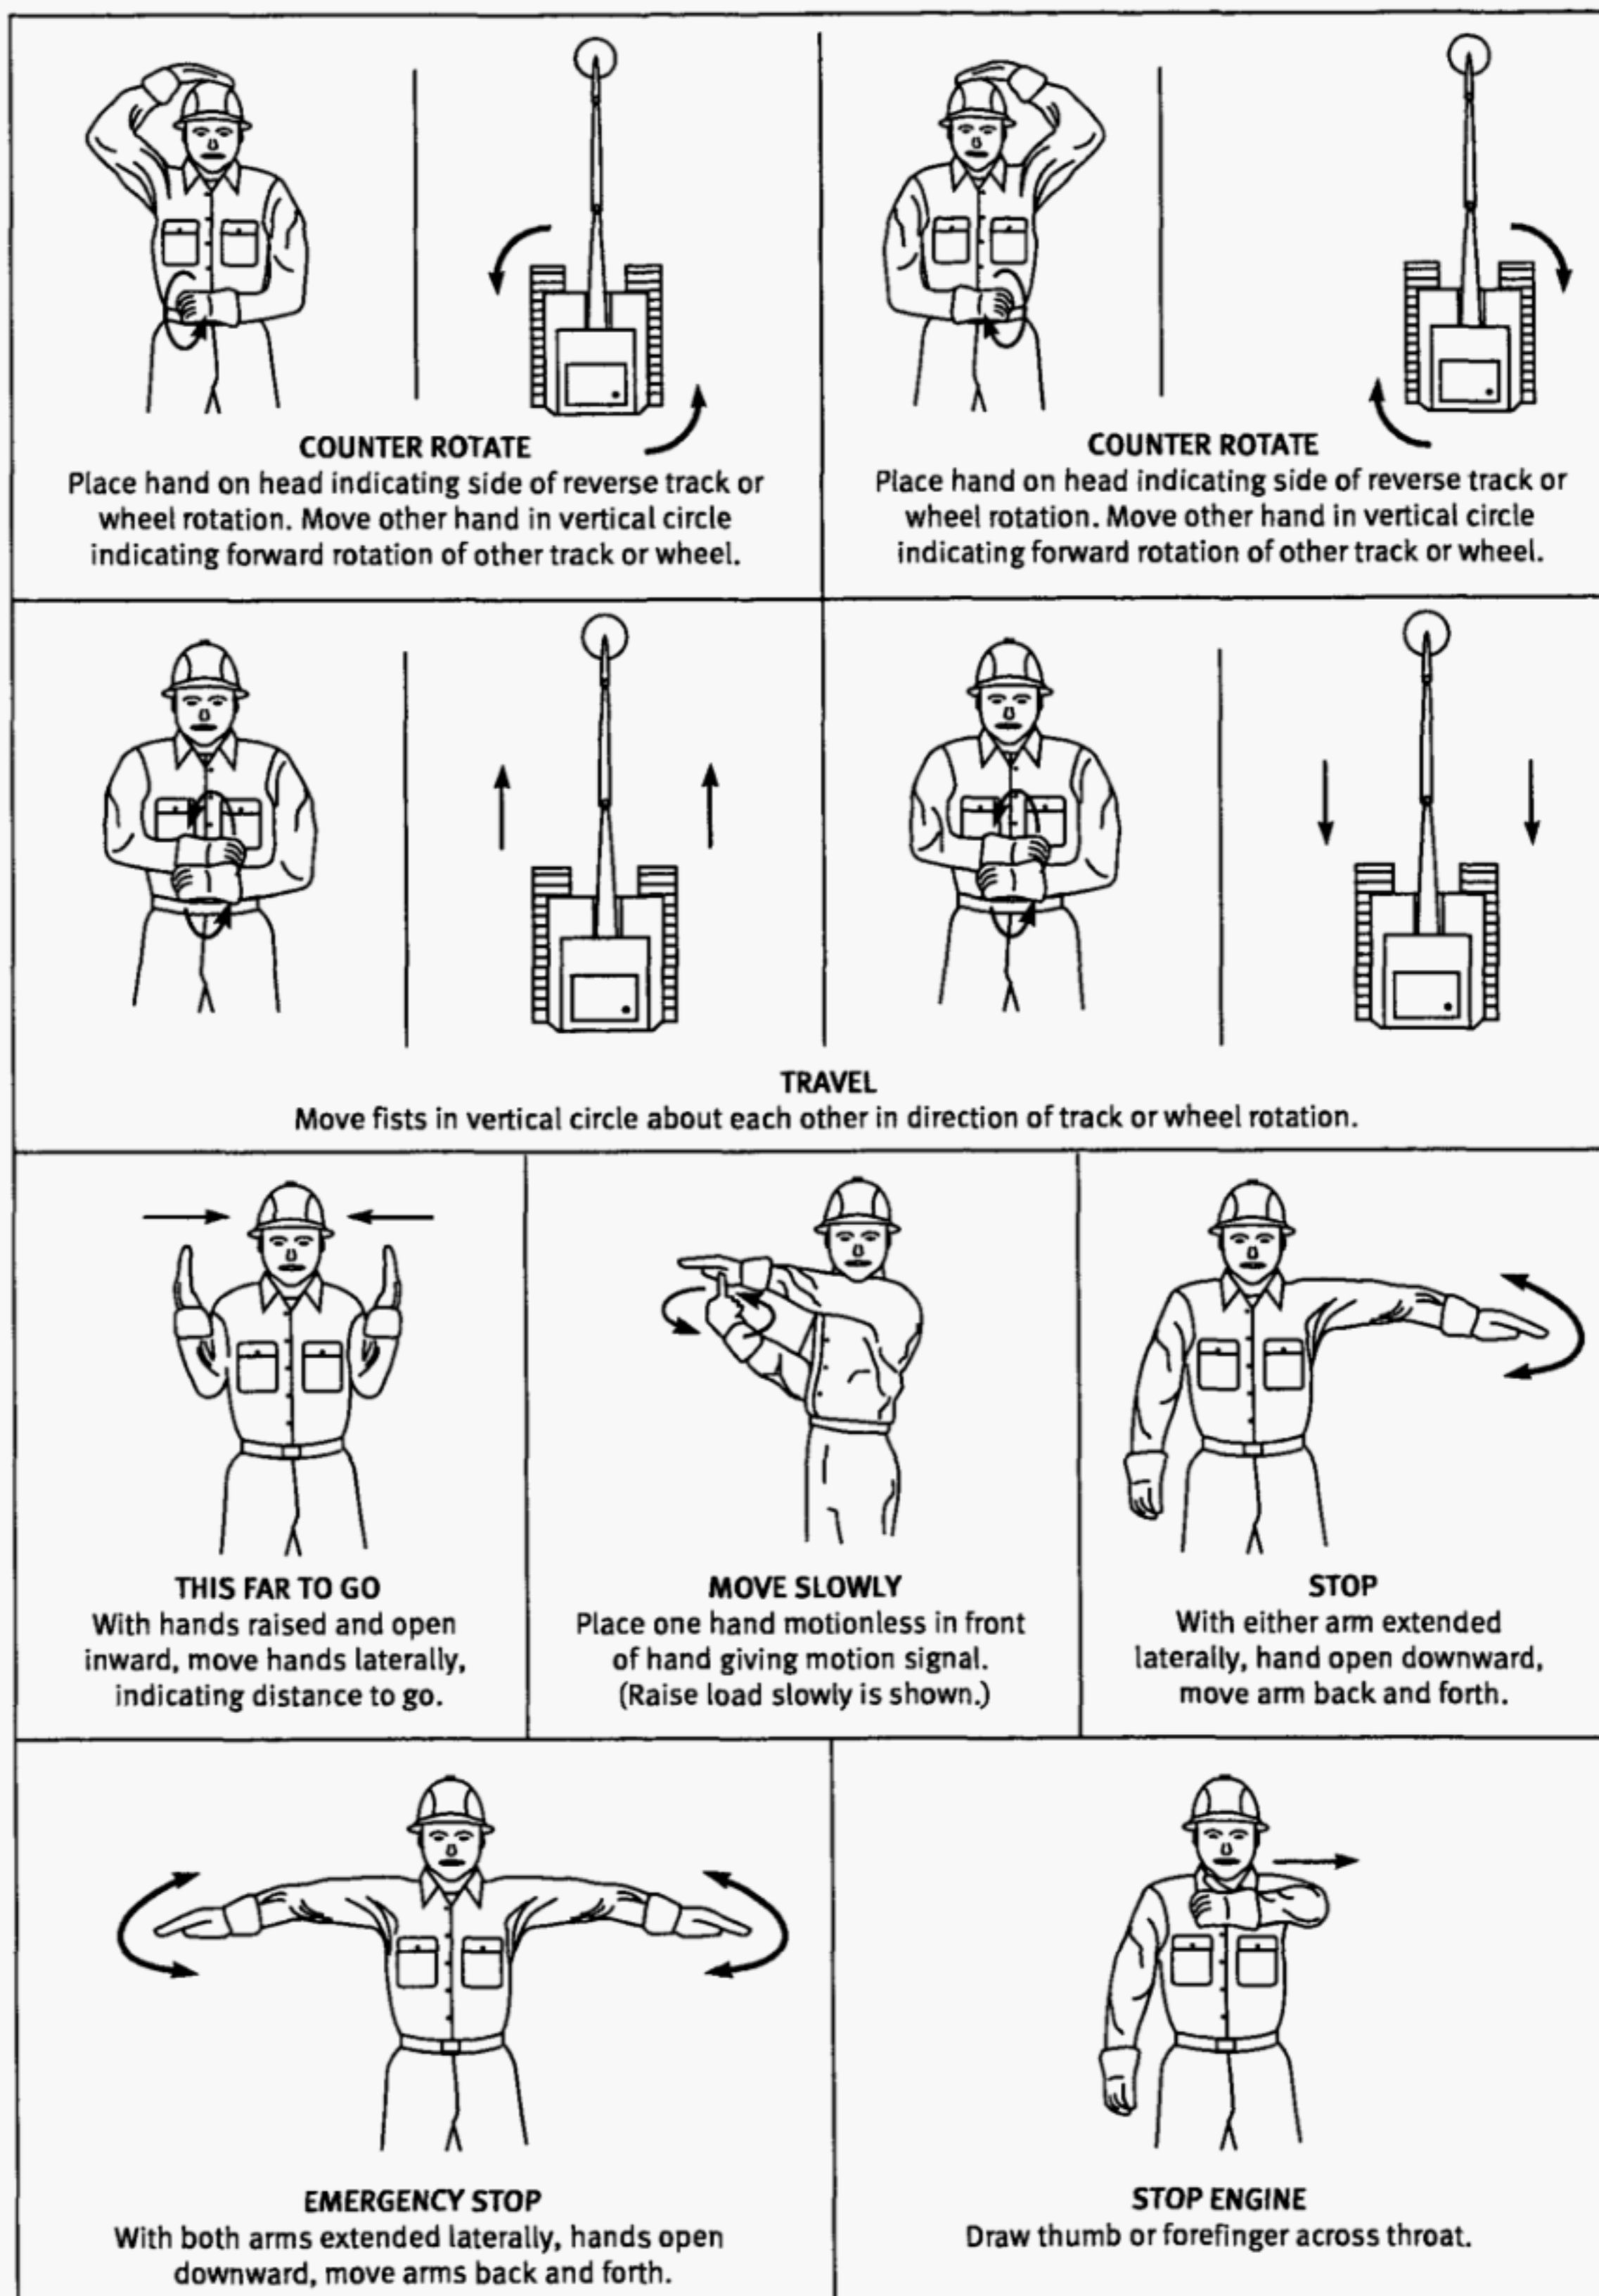


Fig. 12 Material Handler Hand Signals (Cont'd)

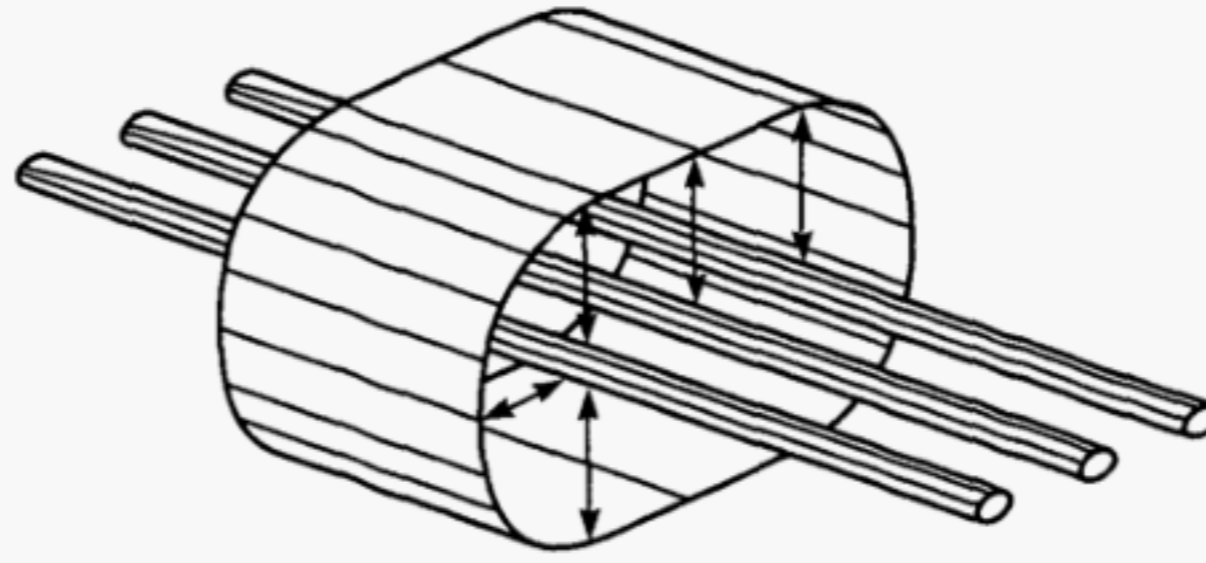

**Danger Zone for Handlers Operating Near  
Electrical Transmission Lines**

**Table 1 Required Clearance for Normal Voltage in  
Operation Near High Voltage Power Lines**

Normal Voltage, kV (Phase to Phase)	Minimum Required Clearance [Note (1)]	
	ft	m
Up to 50	10	3.05
Over 50 to 200	15	4.6
Over 200 to 350	20	6.1
Over 350 to 500	25	7.62
Over 500 to 750	35	10.67
Over 750 to 1000	45	13.72

**NOTE:**

- (1) Environmental conditions such as fog, smoke, or precipitation may require increased clearances.

automatic closing cap and a flame arrester.

(b) Handlers shall not be refueled while the engine is running.

(c) Smoking or open flames shall be prohibited in the refueling area.

#### **25-3.4.9 Fire Extinguishers**

(a) A portable fire extinguisher, with a basic minimum extinguisher rating of 10 BC, shall be installed in the handler, preferably in the cab.

(b) Operating and maintenance personnel shall be familiar with the use and care of the fire extinguisher provided.

#### **25-3.4.10 Working Near Power Lines**

Handlers shall be operated so that no part of the handler or load enters the danger zone (see Table 1 and illustration).

# **ASME B30.25-2003 INTERPRETATIONS**

## **Replies to Technical Inquiries March 1998 through July 2002**

### **FOREWORD**

This publication includes all of the written replies issued between the indicated dates by the Secretary, speaking for the ASME B30 Standards Committee, Safety Standards for Cableways, Cranes, Derricks, Hoists, Hooks, Jacks, and Slings, to inquiries concerning interpretations of technical aspects of ASME B30.25, Scrap and Material Handlers.

These replies are taken verbatim from the original letters except for a few typographical corrections and some minor editorial corrections made for the purpose of improved clarity. In some few instances, a review of the interpretation revealed a need for corrections of a technical nature; in these cases, a corrected interpretation follows immediately after the original reply.

These interpretations were prepared in accordance with the accredited ASME procedures. ASME procedures provide for reconsideration of these interpretations when or if additional information is available that the inquirer believes might affect the interpretation. Further, persons aggrieved by this interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

**Interpretation: 25-01**

Subject: ASME B30.25-1998, Para. 25-1.7.3(b)

Date Issued: May 30, 2001

Question (1): What is meant by “load control devices”?

Reply (1): A “load control device” is a device on the lifting end of a boom, arm, and jib cylinders that is intended to prevent the front from uncontrolled descent in the event of a hydraulic line failure.

Question (2): Why is this provision a recommendation and not a requirement?

Reply (2): These devices are a newly suggested requirement for U.S. manufacturers and the B30 Committee feels that making the provision a recommendation will allow manufacturers time to develop load control devices. The B30 Committee will monitor the effectiveness of these devices and consider making the provision a requirement in future editions of the B30.25 Standard.

## ASME Services

ASME is committed to developing and delivering technical information. At ASME's Information Central, we make every effort to answer your questions and expedite your orders. Our representatives are ready to assist you in the following areas:

ASME Press  
Codes & Standards  
Credit Card Orders  
IMEchE Publications  
Meetings & Conferences  
Member Dues Status

Member Services & Benefits  
Other ASME Programs  
Payment Inquiries  
Professional Development  
Short Courses  
Publications

Public Information  
Self-Study Courses  
Shipping Information  
Subscriptions/Journals/Magazines  
Symposia Volumes  
Technical Papers

### How can you reach us? It's easier than ever!

There are four options for making inquiries\* or placing orders. Simply mail, phone, fax, or E-mail us and an Information Central representative will handle your request.

**Mail**  
**ASME**  
22 Law Drive, Box 2900  
Fairfield, New Jersey  
07007-2900

**Call Toll Free**  
**US & Canada:** 800-THE-ASME  
(800-843-2763)  
**Mexico:** 95-800-THE-ASME  
(95-800-843-2763)  
**Universal:** 973-882-1167

**Fax—24 hours**  
973-882-1717  
973-882-5155

**E-Mail—24 hours**  
Infocentral@asme.org

\* Information Central staff are not permitted to answer inquiries about the technical content of this code or standard. Information as to whether or not technical inquiries are issued to this code or standard is shown on the copyright page. All technical inquiries must be submitted in writing to the staff secretary. Additional procedures for inquiries may be listed within.





ISBN 0-7918-2802-6



9780791828021



J14603

